




unit: mm

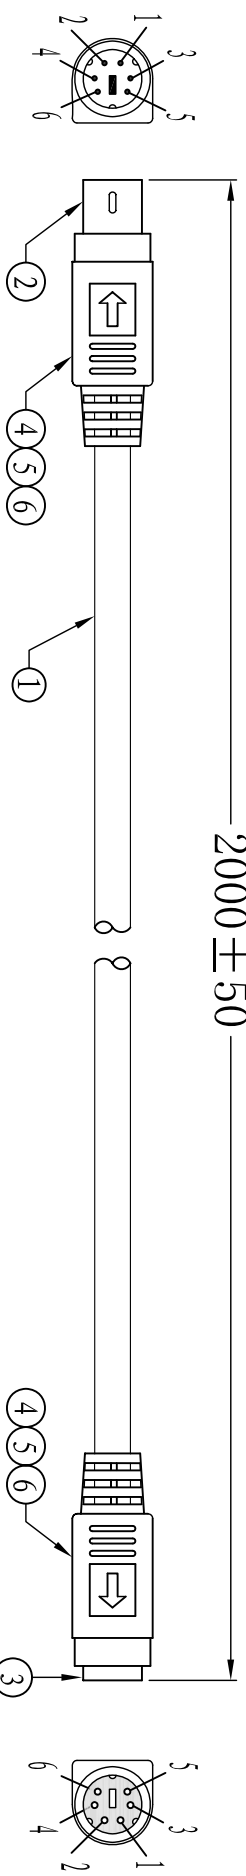

Electrical test:
1. 100% short, open, miswire test
2. Conduct resistance: $2\ \Omega$ max
3. Insulation resistance: $10\ M\Omega$ min
4. dielectric test: DC 300V

PIN ASSIGNMENT		
P1		P2
1	BLACK	1
2	BROWN	2
3	RED	3
4	ORANGE	4
5	YELLOW	5
6	GREEN	6
SHELL _____ D _____ SHELL		

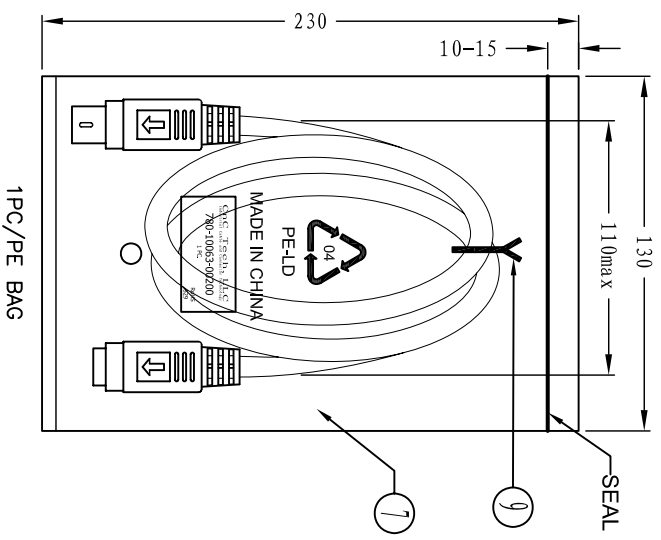

⑨	TIE	1	WHITE L=100mm
⑧	PE BAG	1/10	CLEAR SIZE: 280*330*0.05mm PRINT BLACK"MADE IN CHINA"+ "10PCS"
⑦	PE BAG	1	CLEAR SIZE: 130*230*0.05mm PRINT BLACK"MADE IN CHINA" + "1PC"
⑥	TUBE	2	HEAT SHRINK TUBE BLACK ODO.6*7MM
⑤	IN JACKET	5.2g	CLEAR LD-PE (Mould NO.:NM-65)
④	OUT JACKET	8.1g	PVC 40P COLOR:BEIGE(IV-29)(Mould NO.WM-149)
③	CONN	1	MINI DIN 6PIN FEMALE SOLDER TYPE PIN 鍍前鍍后錫 INSULATOR COLOR:BLACK
②	CONN	1	MINI DIN 6PIN MALE SOLDER TYPE PIN 鍍前鍍后錫 INSULATOR COLOR:BLACK
①	CABLE	1	NOUL 28AWG*6C+D+AL/MT JACKET:BEIGE(IV-29) ODS.0mm L=2000±15MM
No.	NAME	Q'TY	SPECIFICATION

CNC Tech, LLC				
Industrial Cable and Connector Technology				
DRAWN BY	ZHONGHS	DRAWING NO.		
CHECKED BY		CUSTOMER		
APPROVAL BY		ITEM NO.	780-10063-00200	
DECIDE BY		DATE	2012-02-17	
VERSIONS/EDITEON	A/0	PROJECTION		

