

1		2		3		4		5		6		7		8		
CUSTOMER No. :				REV .				CATEGORY	IN IINE WITH THE TYPE		PAGE	REV .	ECN&ECR No.	DESCRIPTION	DSN	DATE
									YES	NO		C1	NA	Initial Drawing	XU	2022.05.24
								NEW ENERGY VEHICLE PRODUCTS		√						
								INDUSTRIAL PRODUCTS	√		1	C2	NA	Change The Length To 1000mm	XU	2022.06.24
								RoHS	√							
								REACH		√						
								Halogen-Free		√						
								CALIFORNIA 65		√						

RED 2

BLACK 1

VIEW A

A

P1

19REF

59REF

△C2 *1000±30

①

②

P/N: 22002233-01-001

SPECIFICATIONS:

1.INSULATION RESISTANCE：10MΩ@500VDC/0.01S.

2.VOLTAGE RATING：300V.

3.CURRENT RATING：10A.

4.OPERATION TEMPERATURE：-40℃~-+80℃.

5.WATERPROOF IPX7(MATED).

6.RoHS COMPLIANT.

UNIT: mm

DESCRIPTION:
STANDARD SERIES 2PIN MALE CONNECTOR WITH
FEMALE PIN(4 LOCKS,MOLDING,-501) L= 1000MM

SCALE: 1:1

SHEET: 1 OF 1

GB/T 1804-M

REV.: C2

SIZE: A4

ASME Y14.5-2009


CHOGORI®

深圳乔合里科技股份有限公司

△C2

2	900-00201-00049	1.06	M	UL2464 2*18AWG PVC -40~80℃ 300V BLACK OD5.5
1	22002233-01-001	1	PC	STANDARD SERIES 2PIN MALE CONNECTOR WITH FEMALE PIN(4 LOCKS,MOLDING,-501)

ITEM	PART NO	QTY	UNIT	DESCRIPTION
MATERIAL OF BILL				
PART No.:	11C03622051302	DRAWN BY:	XU	TECHNICS:
MATERIAL:		PROOFREADED BY:		QUALITY:
MOLD No.:		CHECKED BY:		APPROVED BY:
		STANDARDISATION:		

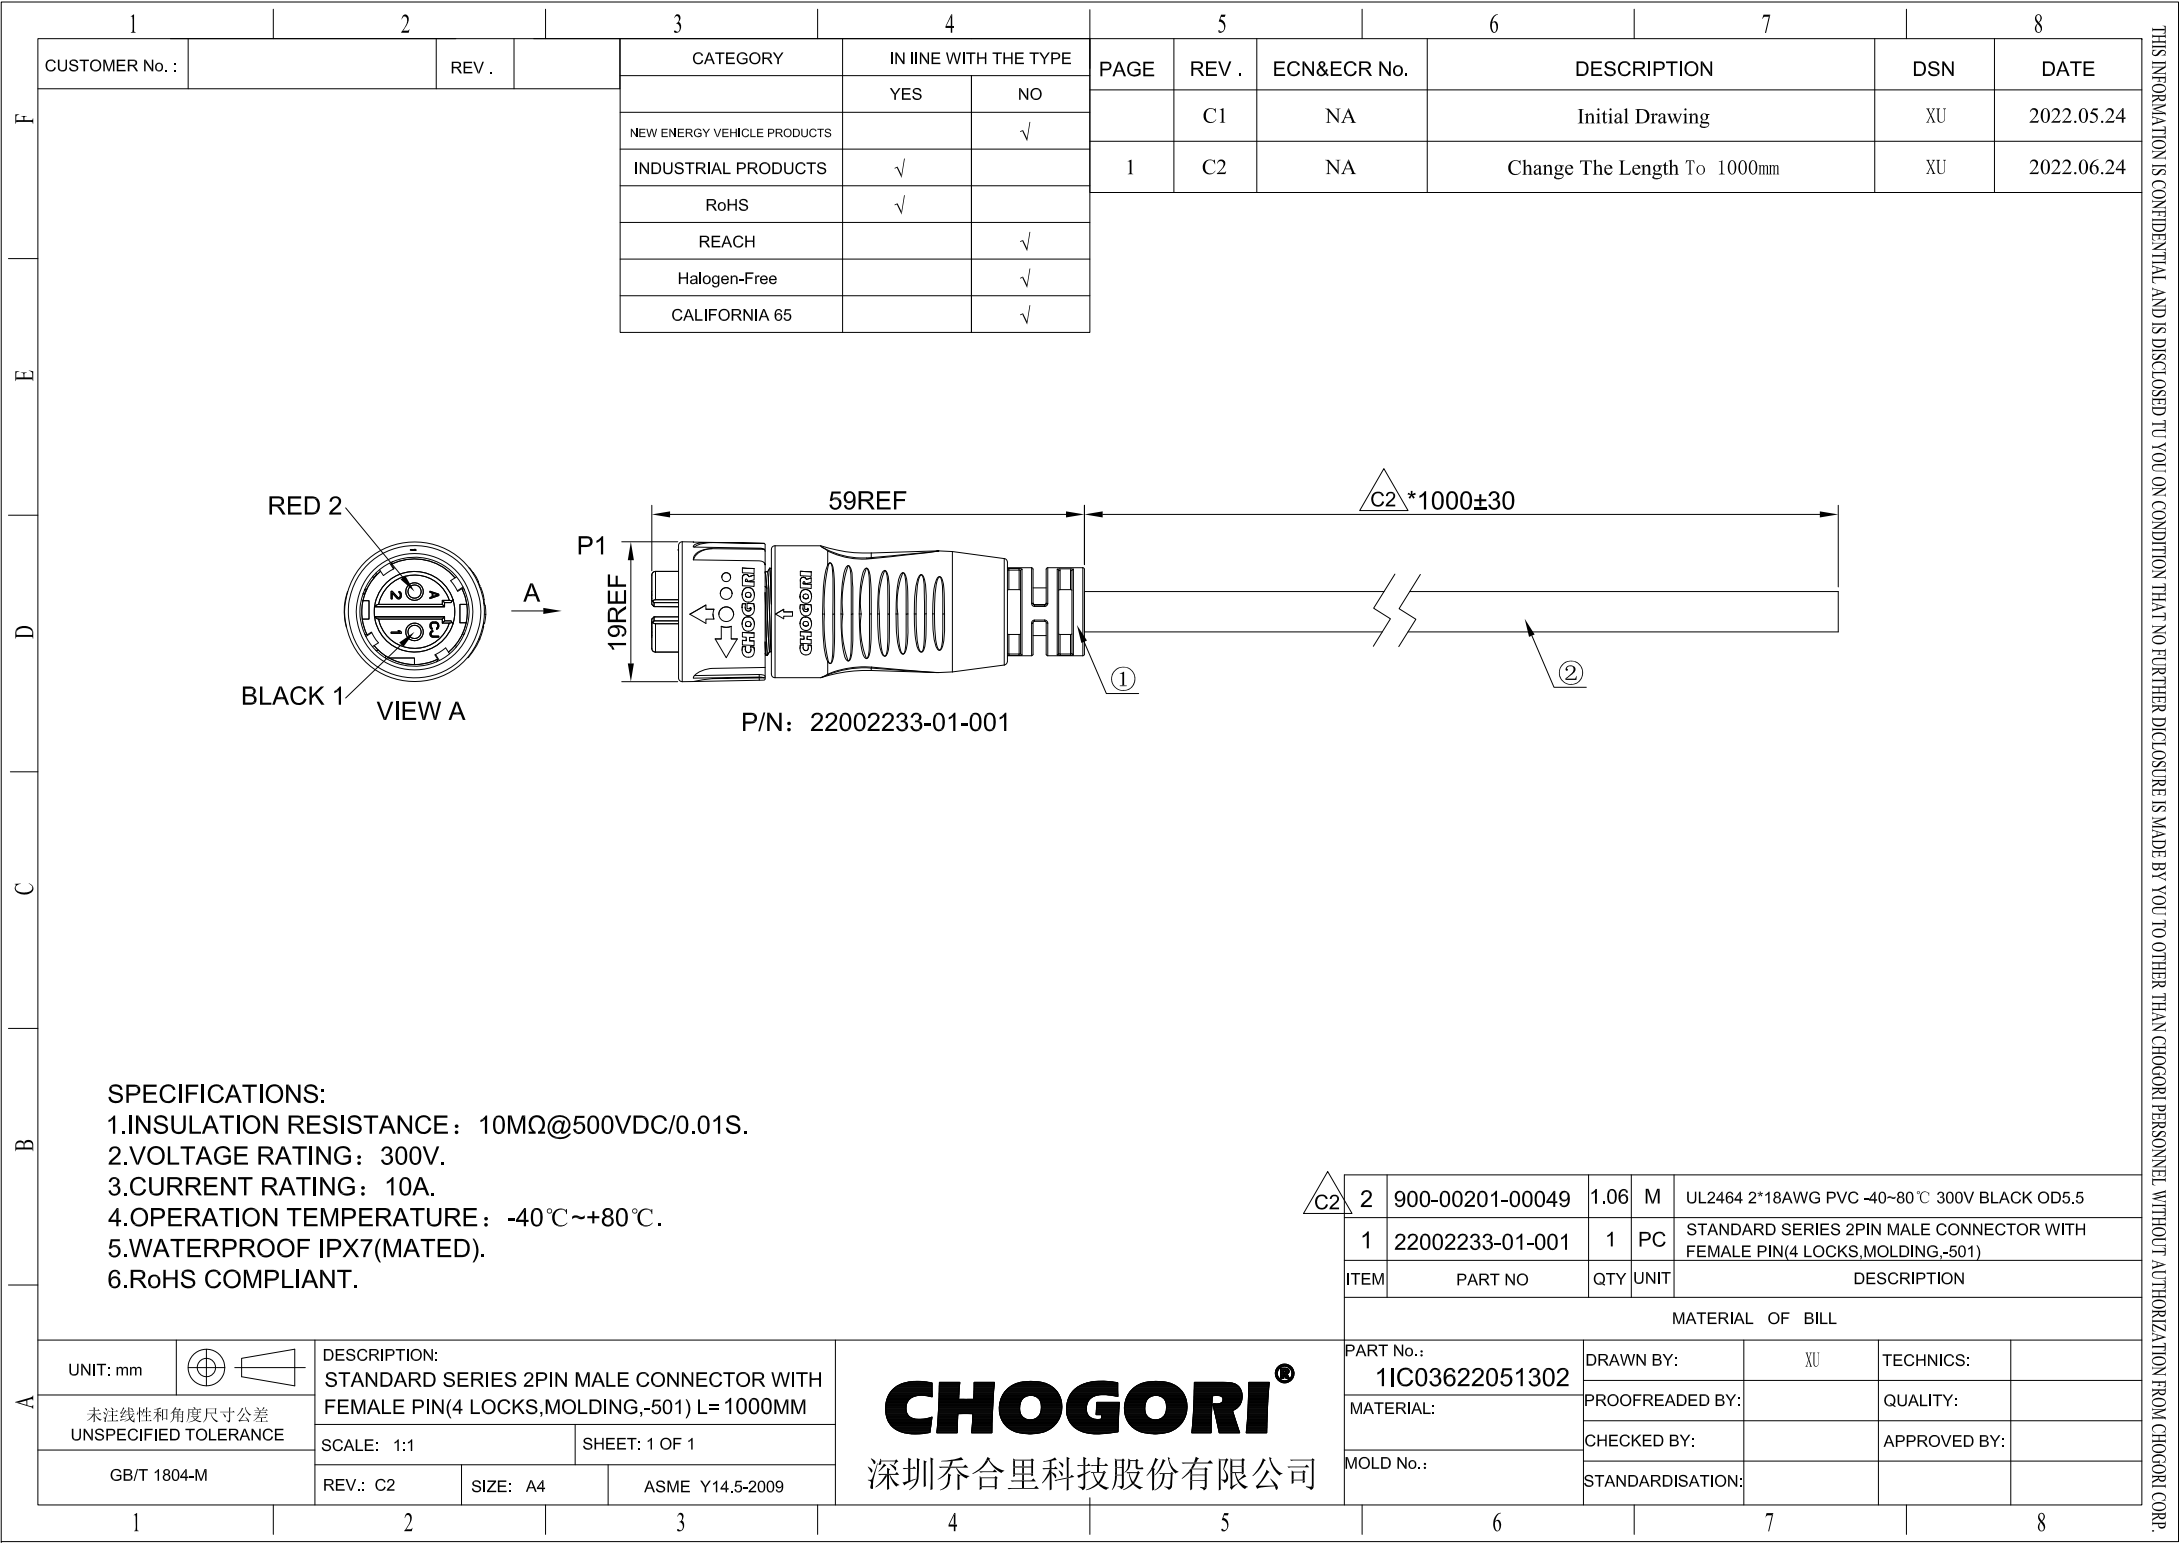

1		2		3		4		5		6		7		8		
CUSTOMER No. :				REV .				CATEGORY	IN IINE WITH THE TYPE		PAGE	REV .	ECN&ECR No.	DESCRIPTION	DSN	DATE
									YES	NO		C1	NA	Initial Drawing	XU	2022.05.24
								NEW ENERGY VEHICLE PRODUCTS		√	1	C2	NA	Change The Length To 1000mm	XU	2022.06.24
								INDUSTRIAL PRODUCTS	√							
								RoHS	√							
								REACH		√						
								Halogen-Free		√						
								CALIFORNIA 65		√						

RED 2

BLACK 1

VIEW A

A

P1

19REF

59REF

△C2 *1000±30

①

②

P/N: 22002233-01-001

SPECIFICATIONS:

1.INSULATION RESISTANCE：10MΩ@500VDC/0.01S.

2.VOLTAGE RATING：300V.

3.CURRENT RATING：10A.

4.OPERATION TEMPERATURE：-40℃~-+80℃.

5.WATERPROOF IPX7(MATED).

6.RoHS COMPLIANT.

UNIT: mm

DESCRIPTION:
STANDARD SERIES 2PIN MALE CONNECTOR WITH
FEMALE PIN(4 LOCKS,MOLDING,-501) L= 1000MM

SCALE: 1:1

SHEET: 1 OF 1

GB/T 1804-M

REV.: C2

SIZE: A4

ASME Y14.5-2009

CHOGORI®

深圳乔合里科技股份有限公司

△C2

2

900-00201-00049

1.06

M

UL2464 2*18AWG PVC -40~80℃ 300V BLACK OD5.5

1

22002233-01-001

1

PC

STANDARD SERIES 2PIN MALE CONNECTOR WITH
FEMALE PIN(4 LOCKS,MOLDING,-501)

ITEM

PART NO

QTY

UNIT

DESCRIPTION

MATERIAL OF BILL

PART No.:
11C03622051302

DRAWN BY:

XU

TECHNICS:

MATERIAL:

PROOFREADED BY:

QUALITY:

CHECKED BY:

APPROVED BY:

MOLD No.:

STANDARDISATION:

1

2

3

4

5

6

7

8

This information is confidential and is disclosed to you on condition that no further disclosure is made by you to other than CHOGORI personnel without authorization from CHOGORI CORP.

- | | | | | | | | | | | | | | | | | |
|----------------|--|---|--|-------|--|---|--|-----------------------------|-----------------------|----|------|-------|-------------|-----------------------------|-----|------------|
| 1 | | 2 | | 3 | | 4 | | 5 | | 6 | | 7 | | 8 | | |
| CUSTOMER No. : | | | | REV . | | | | CATEGORY | IN IINE WITH THE TYPE | | PAGE | REV . | ECN&ECR No. | DESCRIPTION | DSN | DATE |
| | | | | | | | | | YES | NO | | C1 | NA | Initial Drawing | XU | 2022.05.24 |
| | | | | | | | | NEW ENERGY VEHICLE PRODUCTS | | √ | 1 | C2 | NA | Change The Length To 1000mm | XU | 2022.06.24 |
| | | | | | | | | INDUSTRIAL PRODUCTS | √ | | | | | | | |
| | | | | | | | | RoHS | √ | | | | | | | |
| | | | | | | | | REACH | | √ | | | | | | |
| | | | | | | | | Halogen-Free | | √ | | | | | | |
| | | | | | | | | CALIFORNIA 65 | | √ | | | | | | |
- RED 2

BLACK 1

VIEW A

A

P1

19REF

59REF

△C2 *1000±30

①

②

P/N: 22002233-01-001
- SPECIFICATIONS:

1.INSULATION RESISTANCE：10MΩ@500VDC/0.01S.

2.VOLTAGE RATING：300V.

3.CURRENT RATING：10A.

4.OPERATION TEMPERATURE：-40℃~-+80℃.

5.WATERPROOF IPX7(MATED).

6.RoHS COMPLIANT.
- UNIT: mm

DESCRIPTION:
STANDARD SERIES 2PIN MALE CONNECTOR WITH
FEMALE PIN(4 LOCKS,MOLDING,-501) L= 1000MM

SCALE: 1:1

SHEET: 1 OF 1

GB/T 1804-M

REV.: C2

SIZE: A4

ASME Y14.5-2009

CHOGORI®

深圳乔合里科技股份有限公司
- △C2

2	900-00201-00049	1.06	M	UL2464 2*18AWG PVC -40~80℃ 300V BLACK OD5.5
1	22002233-01-001	1	PC	STANDARD SERIES 2PIN MALE CONNECTOR WITH FEMALE PIN(4 LOCKS,MOLDING,-501)
ITEM	PART NO	QTY	UNIT	DESCRIPTION
MATERIAL OF BILL				
PART No.:	11C03622051302	DRAWN BY:	XU	TECHNICS:
MATERIAL:		PROOFREADED BY:		QUALITY:
		CHECKED BY:		APPROVED BY:
MOLD No.:		STANDARDISATION:		

1		2		3		4		5		6		7		8			
CUSTOMER No. :				REV. :				CATEGORY	IN IINE WITH THE TYPE		PAGE	REV. :	ECN&ECR No.	DESCRIPTION	DSN	DATE	
									YES	NO		C1	NA	Initial Drawing	XU	2022.05.24	
								NEW ENERGY VEHICLE PRODUCTS		√							
								INDUSTRIAL PRODUCTS	√		1	C2	NA	Change The Length To 1000mm	XU	2022.06.24	
								RoHS	√								
								REACH		√							
								Halogen-Free		√							
								CALIFORNIA 65		√							

RED 2

BLACK 1

VIEW A

A

P1

19REF

59REF

△C2 *1000±30

①

②

P/N: 22002233-01-001

SPECIFICATIONS:

1.INSULATION RESISTANCE：10MΩ@500VDC/0.01S.

2.VOLTAGE RATING：300V.

3.CURRENT RATING：10A.

4.OPERATION TEMPERATURE：-40℃~-+80℃.

5.WATERPROOF IPX7(MATED).

6.RoHS COMPLIANT.

UNIT: mm

DESCRIPTION:
STANDARD SERIES 2PIN MALE CONNECTOR WITH
FEMALE PIN(4 LOCKS,MOLDING,-501) L= 1000MM

SCALE: 1:1

SHEET: 1 OF 1

GB/T 1804-M

REV.: C2

SIZE: A4

ASME Y14.5-2009

CHOGORI®

深圳乔合里科技股份有限公司

△C2

2

900-00201-00049

1.06

M

UL2464 2*18AWG PVC -40~80℃ 300V BLACK OD5.5

1

22002233-01-001

1

PC

STANDARD SERIES 2PIN MALE CONNECTOR WITH
FEMALE PIN(4 LOCKS,MOLDING,-501)

ITEM

PART NO

QTY

UNIT

DESCRIPTION

MATERIAL OF BILL

PART No.:
11C03622051302

DRAWN BY:

XU

TECHNICS:

MATERIAL:

PROOFREADED BY:

QUALITY:

CHECKED BY:

APPROVED BY:

MOLD No.:

STANDARDISATION:

1

2

3

4

5

6

7

8

This information is confidential and is disclosed to you on condition that no further disclosure is made by you to other than CHOGORI PERSONNEL WITHOUT AUTHORIZATION FROM CHOGORI CORP.

1		2		3		4		5		6		7		8		
CUSTOMER No. :				REV .				CATEGORY	IN IINE WITH THE TYPE		PAGE	REV .	ECN&ECR No.	DESCRIPTION	DSN	DATE
									YES	NO		C1	NA	Initial Drawing	XU	2022.05.24
								NEW ENERGY VEHICLE PRODUCTS		√						
								INDUSTRIAL PRODUCTS	√		1	C2	NA	Change The Length To 1000mm	XU	2022.06.24
								RoHS	√							
								REACH		√						
								Halogen-Free		√						
								CALIFORNIA 65		√						

RED 2

BLACK 1

VIEW A

A

P1

19REF

59REF

△C2 *1000±30

①

②

P/N: 22002233-01-001

SPECIFICATIONS:

1.INSULATION RESISTANCE：10MΩ@500VDC/0.01S.

2.VOLTAGE RATING：300V.

3.CURRENT RATING：10A.

4.OPERATION TEMPERATURE：-40℃~-+80℃.

5.WATERPROOF IPX7(MATED).

6.RoHS COMPLIANT.

UNIT: mm

DESCRIPTION:
STANDARD SERIES 2PIN MALE CONNECTOR WITH
FEMALE PIN(4 LOCKS,MOLDING,-501) L= 1000MM

SCALE: 1:1

SHEET: 1 OF 1

GB/T 1804-M

REV.: C2

SIZE: A4

ASME Y14.5-2009

CHOGORI®

深圳乔合里科技股份有限公司

△C2

2

900-00201-00049

1.06

M

UL2464 2*18AWG PVC -40~80℃ 300V BLACK OD5.5

1

22002233-01-001

1

PC

STANDARD SERIES 2PIN MALE CONNECTOR WITH
FEMALE PIN(4 LOCKS,MOLDING,-501)

ITEM

PART NO

QTY

UNIT

DESCRIPTION

MATERIAL OF BILL

PART No.:
11C03622051302

DRAWN BY:

XU

TECHNICS:

MATERIAL:

PROOFREADED BY:

QUALITY:

CHECKED BY:

APPROVED BY:

MOLD No.:

STANDARDISATION:

1

2

3

4

5

6

7

8

This information is confidential and is disclosed to you on condition that no further disclosure is made by you to other than CHOGORI personnel without authorization from CHOGORI CORP.

1		2		3		4		5		6		7		8		
CUSTOMER No. :				REV .				CATEGORY	IN IINE WITH THE TYPE		PAGE	REV .	ECN&ECR No.	DESCRIPTION	DSN	DATE
									YES	NO		C1	NA	Initial Drawing	XU	2022.05.24
								NEW ENERGY VEHICLE PRODUCTS		√	1	C2	NA	Change The Length To 1000mm	XU	2022.06.24
								INDUSTRIAL PRODUCTS	√							
								RoHS	√							
								REACH		√						
								Halogen-Free		√						
								CALIFORNIA 65		√						

RED 2

BLACK 1

VIEW A

A

P1

19REF

59REF

△C2 *1000±30

①

②

P/N: 22002233-01-001

SPECIFICATIONS:

1.INSULATION RESISTANCE：10MΩ@500VDC/0.01S.

2.VOLTAGE RATING：300V.

3.CURRENT RATING：10A.

4.OPERATION TEMPERATURE：-40℃~-+80℃.

5.WATERPROOF IPX7(MATED).

6.RoHS COMPLIANT.

UNIT: mm

DESCRIPTION:
STANDARD SERIES 2PIN MALE CONNECTOR WITH
FEMALE PIN(4 LOCKS,MOLDING,-501) L= 1000MM

SCALE: 1:1

SHEET: 1 OF 1

GB/T 1804-M

REV.: C2

SIZE: A4

ASME Y14.5-2009

CHOGORI®

深圳乔合里科技股份有限公司

△C2

2

900-00201-00049

1.06

M

UL2464 2*18AWG PVC -40~80℃ 300V BLACK OD5.5

1

22002233-01-001

1

PC

STANDARD SERIES 2PIN MALE CONNECTOR WITH
FEMALE PIN(4 LOCKS,MOLDING,-501)

ITEM

PART NO

QTY

UNIT

DESCRIPTION

MATERIAL OF BILL

PART No.:
11C03622051302

DRAWN BY:

XU

TECHNICS:

MATERIAL:

PROOFREADED BY:

QUALITY:

CHECKED BY:

APPROVED BY:

MOLD No.:

STANDARDISATION:

1

2

3

4

5

6

7

8

This information is confidential and is disclosed to you on condition that no further disclosure is made by you to other than CHOGORI personnel without authorization from CHOGORI CORP.