


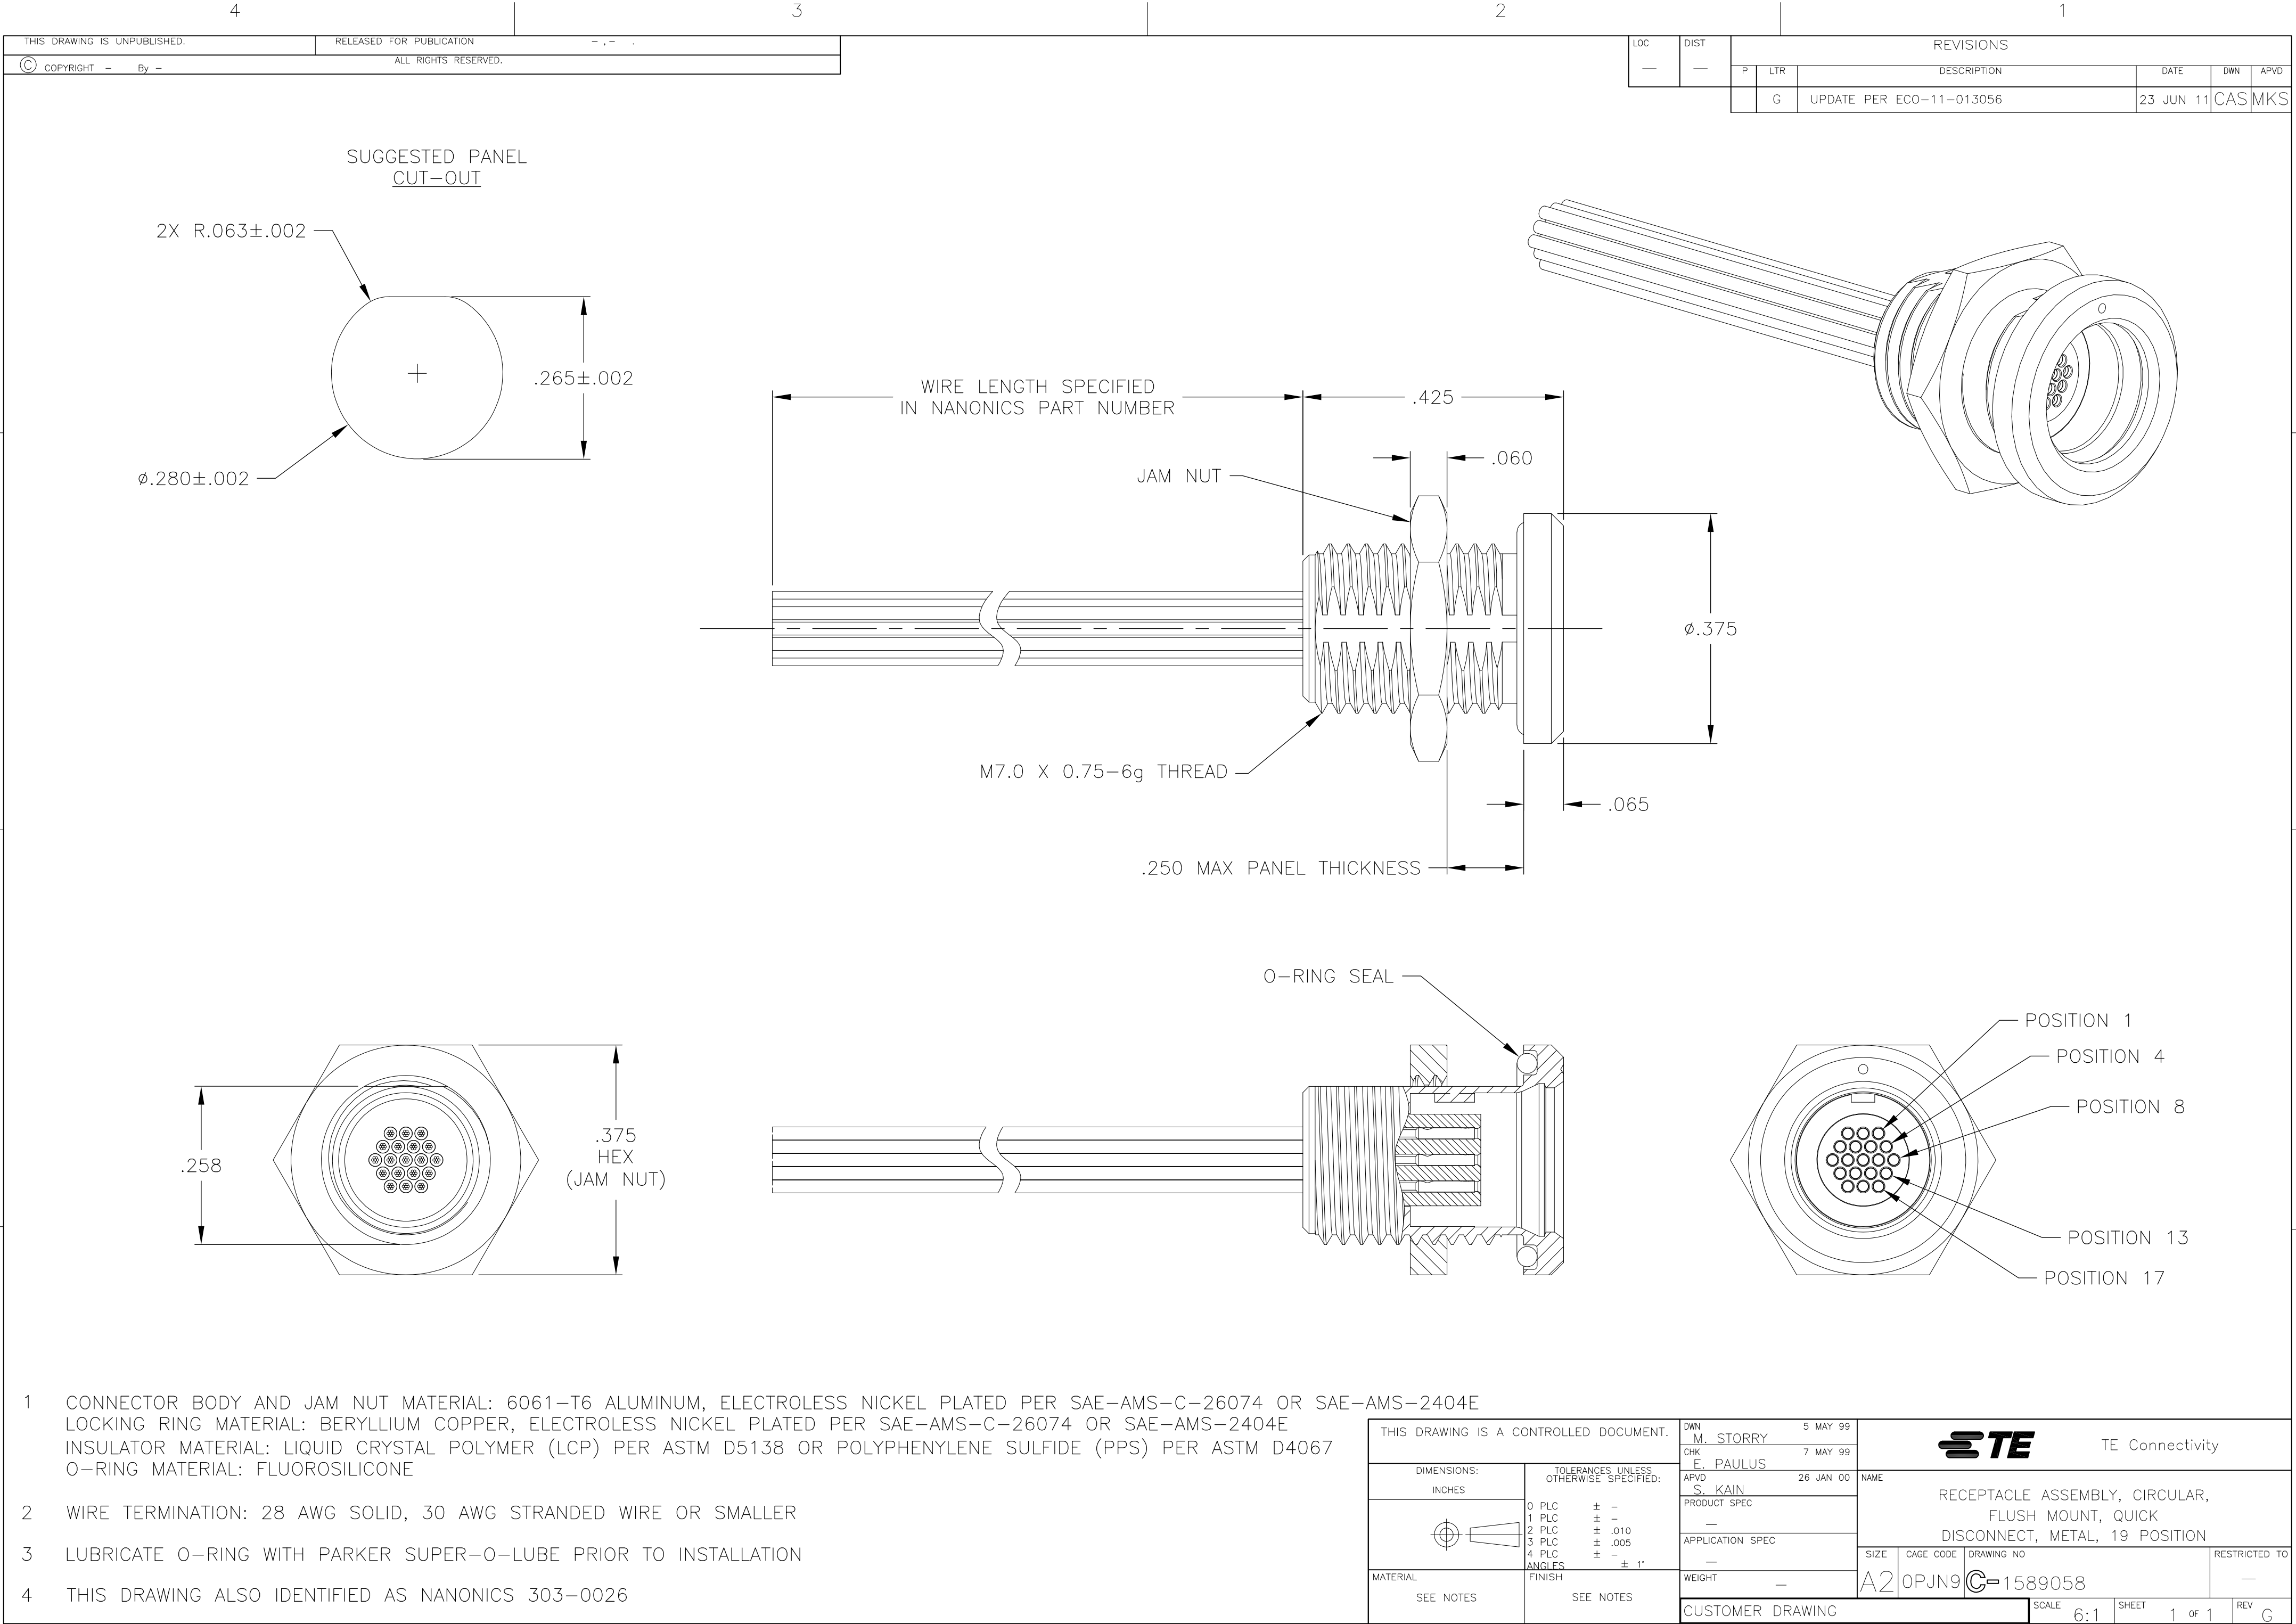

- 1 CONNECTOR BODY AND JAM NUT MATERIAL: 6061-T6 ALUMINUM, ELECTROLESS NICKEL PLATED PER SAE-AMS-C-26074 OR SAE-AMS-2404E
LOCKING RING MATERIAL: BERYLLIUM COPPER, ELECTROLESS NICKEL PLATED PER SAE-AMS-C-26074 OR SAE-AMS-2404E
INSULATOR MATERIAL: LIQUID CRYSTAL POLYMER (LCP) PER ASTM D5138 OR POLYPHENYLENE SULFIDE (PPS) PER ASTM D4067
O-RING MATERIAL: FLUOROSILICONE
- 2 WIRE TERMINATION: 28 AWG SOLID, 30 AWG STRANDED WIRE OR SMALLER
- 3 LUBRICATE O-RING WITH PARKER SUPER-O-LUBE PRIOR TO INSTALLATION
- 4 THIS DRAWING ALSO IDENTIFIED AS NANONICS 303-0026

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M. STORRY	5 MAY 99	 TE Connectivity									
		CHK E. PAULUS	7 MAY 99										
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME RECEPTACLE ASSEMBLY, CIRCULAR, FLUSH MOUNT, QUICK DISCONNECT, METAL, 19 POSITION									
	0 PLC ± -	APVD S. KAIN	26 JAN 00										
	1 PLC ± -	PRODUCT SPEC											
	2 PLC ± .010	—											
	3 PLC ± .005	APPLICATION SPEC											
4 PLC ± -	—		SIZE		CAGE CODE	DRAWING NO	RESTRICTED TO						
MATERIAL	FINISH	WEIGHT	—	A2	0PJN9	C=1589058	—						
SEE NOTES		SEE NOTES		CUSTOMER DRAWING				SCALE	6:1	SHEET	1 of 1	REV	G