
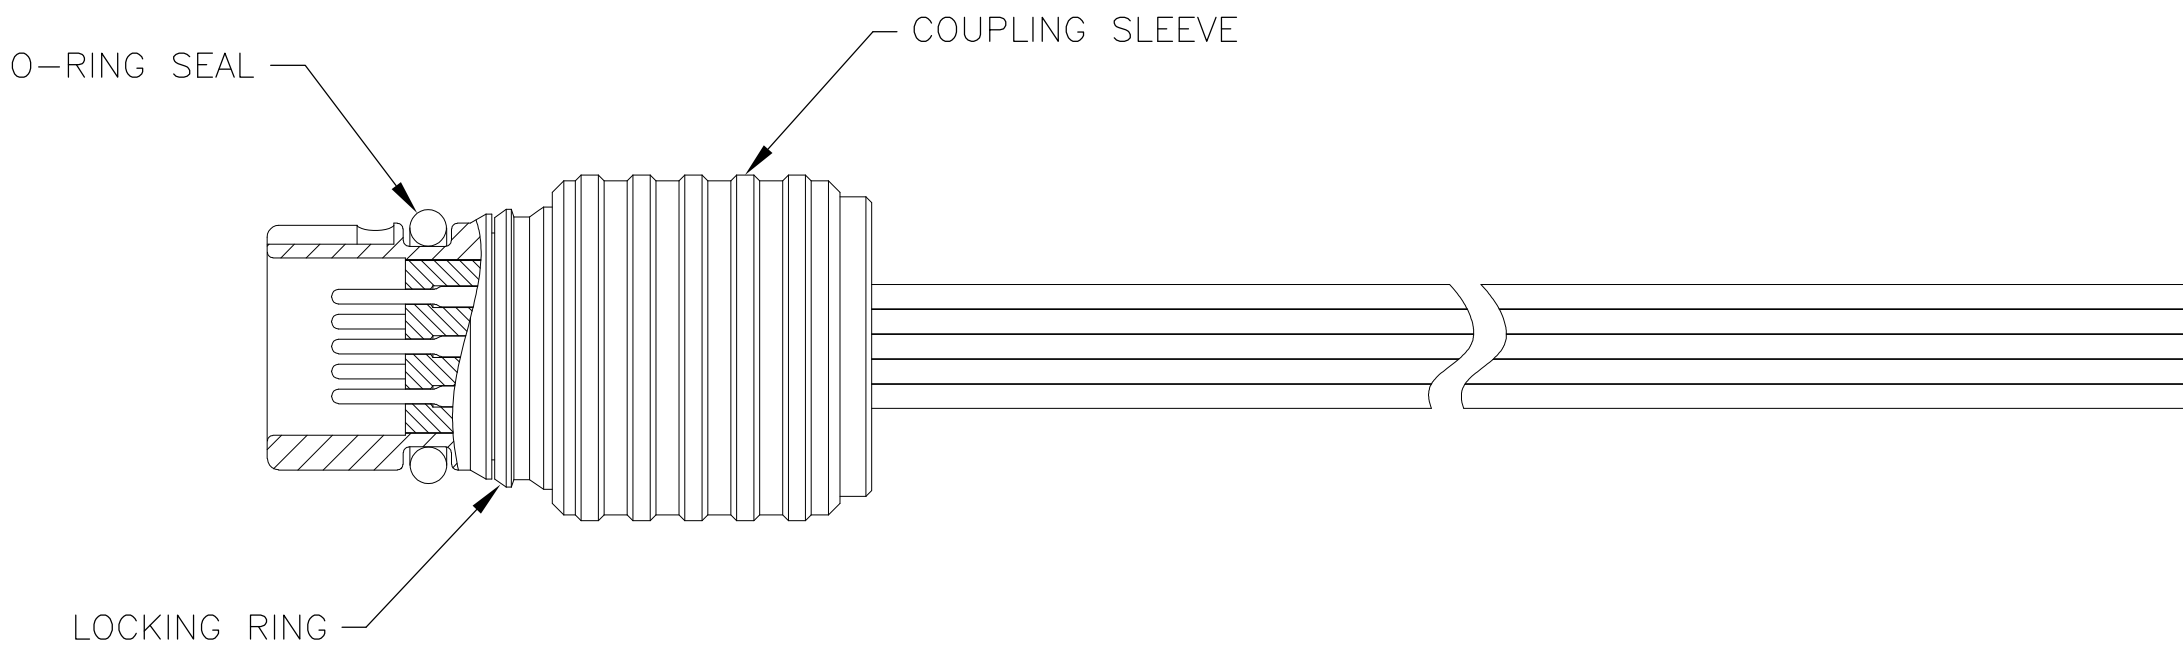
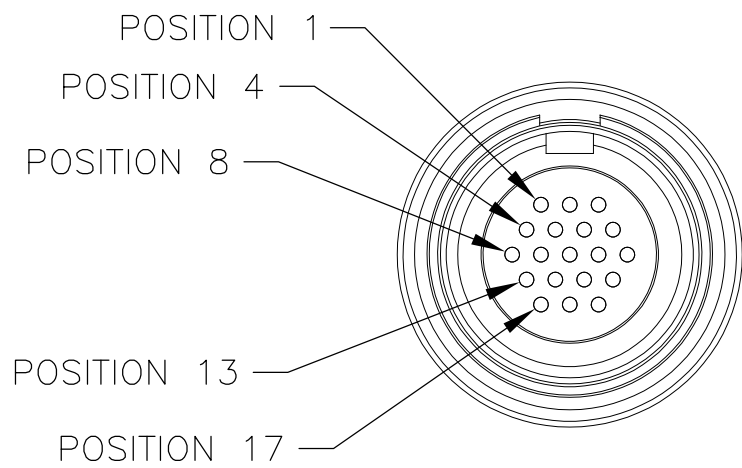
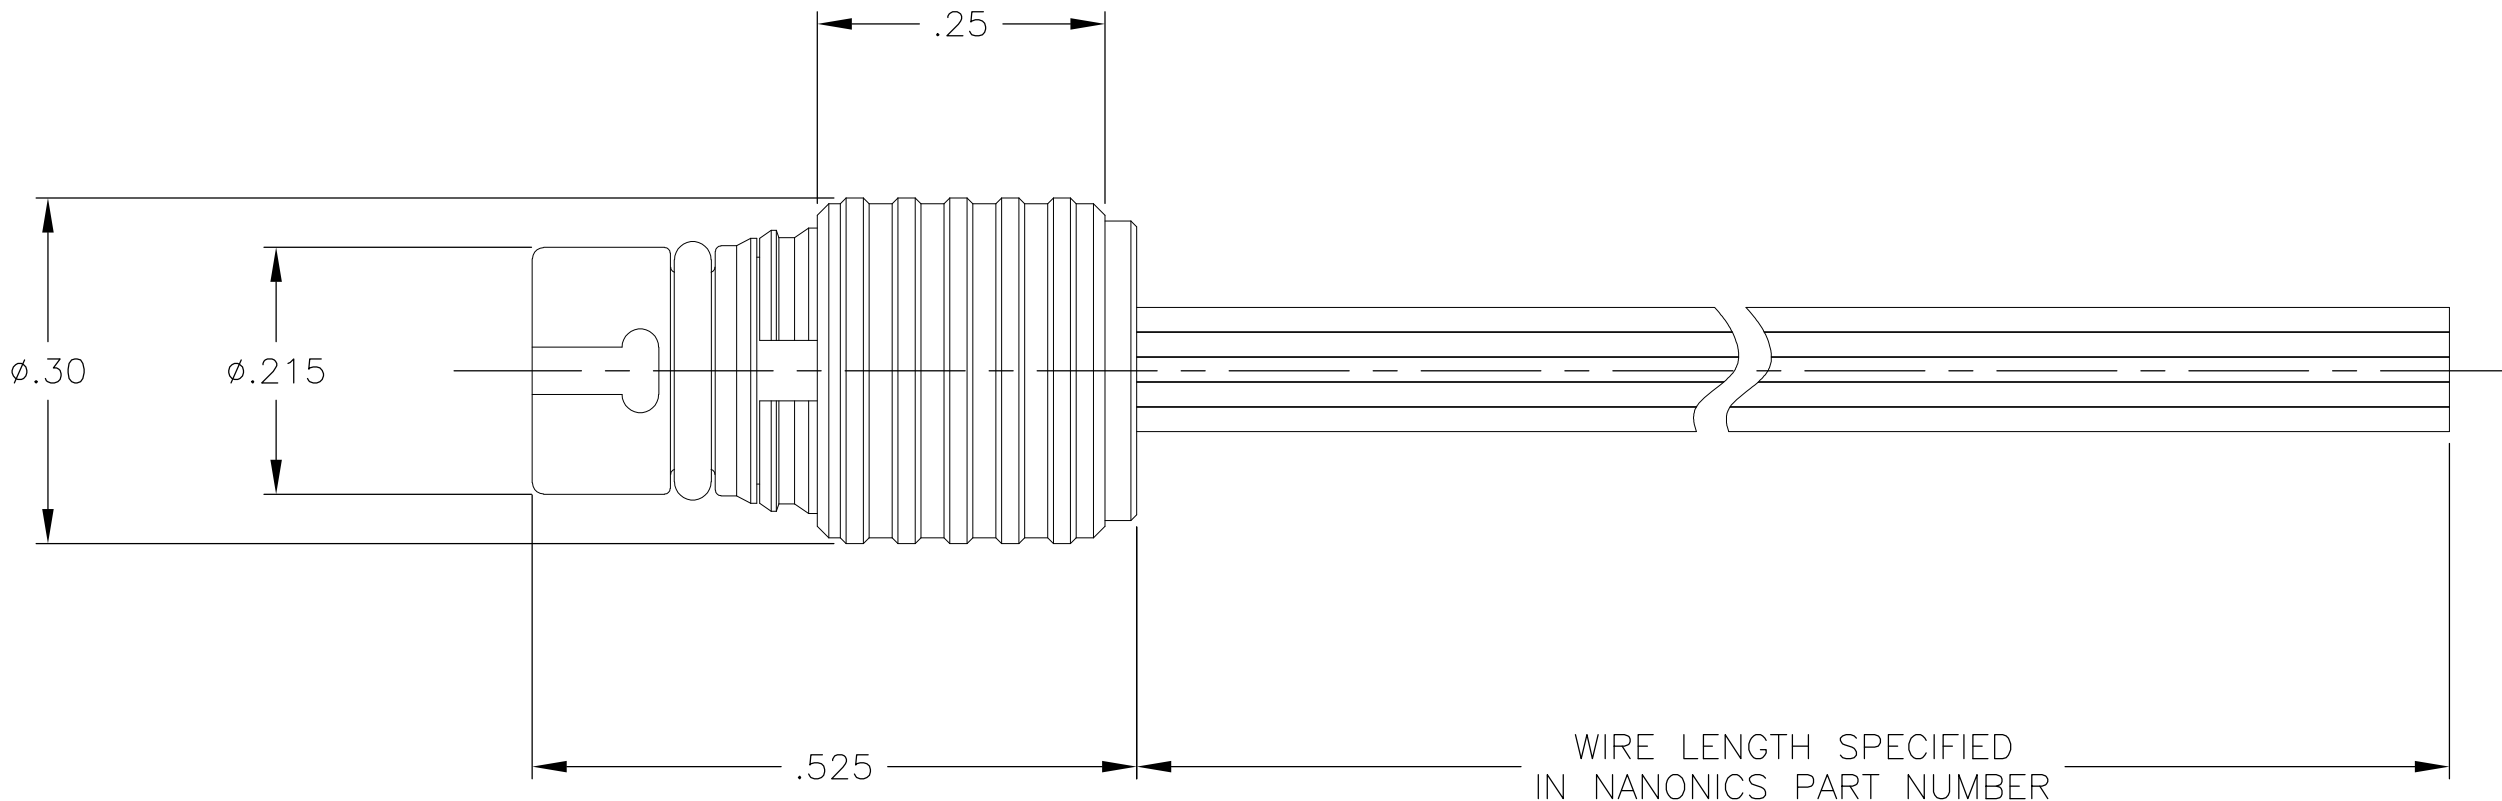


LOC —	DIST —	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			G	UPDATE PER ECO-11-013056	23 JUN 11	CAS	MKS

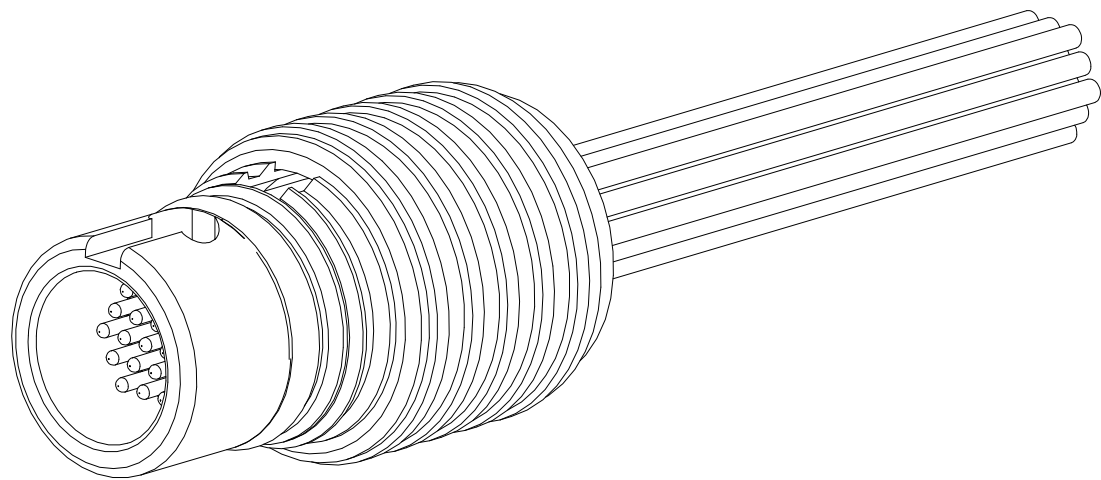

- 1
- CONNECTOR BODY AND COUPLING SLEEVE MATERIAL: 6061-T6 ALUMINUM, ELECTROLESS NICKEL PLATED PER SAE-AMS-C-26074 OR SAE-AMS-2404E
LOCKING RING MATERIAL: BERYLLIUM COPPER, ELECTROLESS NICKEL PLATED PER SAE-AMS-C-26074 OR SAE-AMS-2404E
INSULATOR MATERIAL: LIQUID CRYSTAL POLYMER (LCP) PER ASTM D5138 OR POLYPHENYLENE SULFIDE (PPS) PER ASTM D4067
O-RING MATERIAL: FLUOROSILICONE

- 2
- WIRE TERMINATION: 28 AWG SOLID, 30 AWG STRANDED WIRE OR SMALLER

- 3
- LUBRICATE O-RING WITH PARKER SUPER-O-LUBE PRIOR TO INSTALLATION

- 4
- THIS DRAWING ALSO IDENTIFIED AS NANONICS 303-0025

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M. STORRY 8 APR 99		 TE Connectivity			
		CHK E. PAULUS 8 APR 99					
DIMENSIONS: INCHES		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		APVD S. KAIN 26 JAN 00		NAME PLUG ASSEMBLY, CIRCULAR, QUICK DISCONNECT, METAL, 19 POSITION	
		0 PLC ± -		PRODUCT SPEC			
		1 PLC ± -		—			
		2 PLC ± .010		APPLICATION SPEC			
		3 PLC ± .005		—		SIZE	
		4 PLC ± -		—		CAGE CODE	
MATERIAL		FINISH		WEIGHT —		DRAWING NO	
SEE NOTES		SEE NOTES		A2		RESTRICTED TO	
				0PJN9		—	
				C=1589057			
				CUSTOMER DRAWING		SCALE 6:1	
						SHEET 1 of 1	
						REV G	