
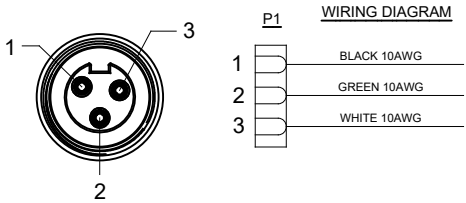


REVISIONS					
REV	ECO	DESCRIPTION	DATE	BY	APPR
A1	-	TECHNICAL DATA SHEET RELEASE	12-MAY-14	KMM	RFC

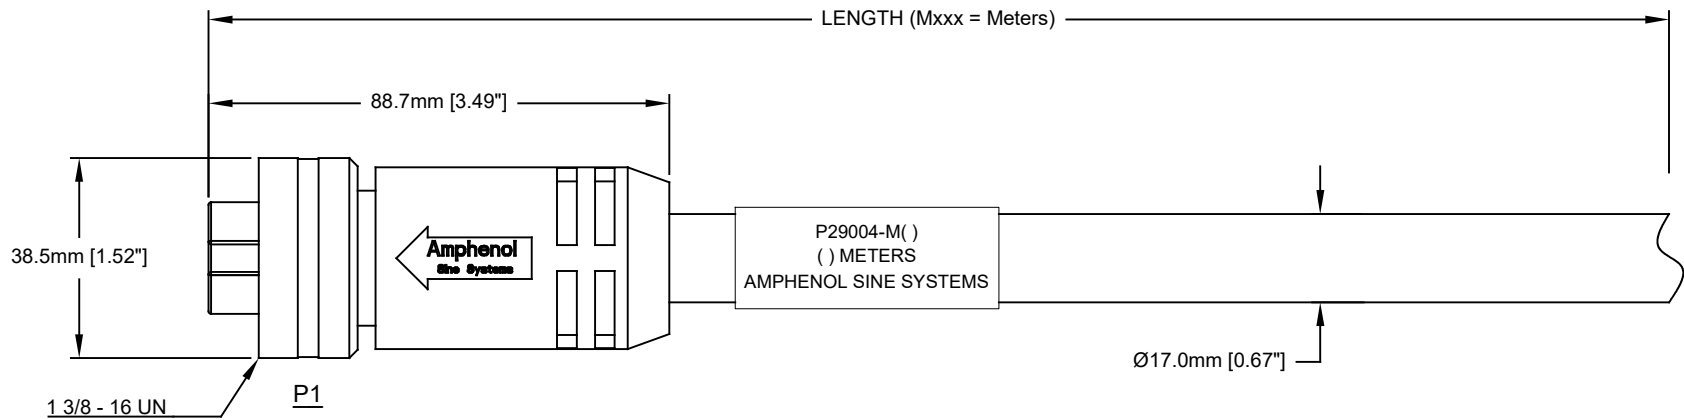

TECHNICAL DATA:

- 1) MATERIALS:
COUPLING NUT: MACHINED ALUMINUM, ANODIZED
INSULATION INSERT: THERMOPLASTIC, UL 94/V-0
CONTACT: GOLD FLASH PLATING OVER COPPER ALLOY
OVERMOLD MATERIAL: THERMOPLASTIC COLOR: BLACK
CABLE RATING: UL LISTED DUAL RATED TC-ER/STOOW,
CSA TYPE STOOW, FT4 FLAME RATING, 600V,
90°C DRY & 75°C WET (TC-ER), 105°C (STOOW)
CABLE JACKET MATERIAL: PVC COLOR: BLACK
CONDUCTOR INSULATION: PVC
NUMBER OF CONDUCTORS: (3) 10AWG
- 2) ELECTRICAL DATA:
CURRENT (MAX): 30A
VOLTAGE (MAX): 600V AC/DC
INSULATION RESISTANCE (MIN): 5000M OHMS
DIELECTRIC TEST VOLTAGE: 2200V
SHORT CIRCUIT AMPERAGE RATING: 65kA - BREAKERS AND FUSES

- 3) MECHANICAL DATA:
TEMPERATURE RANGE: -40°C TO 90°C
PROTECTION: IP67 (MATED CONDITION)
MATING CYCLES: >500
VIBRATION RESISTANCE PER MIL-STD-202 METHOD 204
THERMAL SHOCK PER MIL-STD-202 METHOD 207
48 HOUR SALT SPRAY PER MIL-STD-202 METHOD 101

- 4) RoHS COMPLIANT
5) UL 2237 LISTED ASSEMBLY
UL FILE NUMBERS: E339703

Amphenol P/N	MOLEX	TURCK
P29004-M*	C03000A48M*	GKDA30-*M
P29004-M1	C03000A48M010	GKDA30-010M
P29004-M2	C03000A48M020	GKDA30-020M
P29004-M3	C03000A48M030	GKDA30-030M
P29004-M5	C03000A48M050	GKDA30-050M
P29004-M10	C03000A48M100	GKDA30-100M

TOLERANCE	
0-2.99 M = +100.0/-25.0mm	0-9.99 FT = +4" / -1"
3-8.99 M = +150.0/-25.0mm	10.00-29.99 FT = +6" / -1"
9-14.99 M = +300.0/-25.0mm	30.00-49.99 FT = +12" / -1"
15-OVER M = +450.0/-25.0mm	50 FT-OVER = +18" / -1"

PART NUMBER		DESCRIPTION		ITEM
QUANTITY		MATERIALS LIST		
UNLESS OTHERWISE SPECIFIED		SIGNATURES	DATE	Amphenol Sine Systems - www.amphenol-sine.com 44724 Morley Drive Clinton Township, MI 48036
1) All dimensions are in metric (mm).		DRAWN: KMM	12-MAY-14	
2) Tolerances are as follows: 1 PL DEC ±0.30 Fractions ±1/64 2 PL DEC ±0.15 Angles ±1° 3 PL DEC ±0.08		CHECKED: MRF	12-MAY-14	
3) Note reference =		ENGINEER: KMM	12-MAY-14	
MATERIAL SPECIFICATIONS:		APPROVAL: RFC	12-MAY-14	M35 POWERBOSS LITE, 3 PIN, FEMALE-STR, 10 AWG, TC-ER/STOOW, PVC JACKET
PROCESS SPECIFICATIONS:		CUSTOMER:		
THIS DRAWING IS SUPPLIED FOR INFORMATION ONLY. DESIGN FEATURES, SPECIFICATIONS AND PERFORMANCE DATA SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION. NO RIGHTS OF REPRODUCTION ARE IMPLIED. ALL DIMENSIONS ARE SUBJECT TO NORMAL MANUFACTURING VARIATIONS.		SIZE	TYPE	
NEXT ASSY:		C-	P29004-Mxxx	
		SCALE	FULL	REVISION
			C-P29004	A1
		SHEET	1	OF 1