
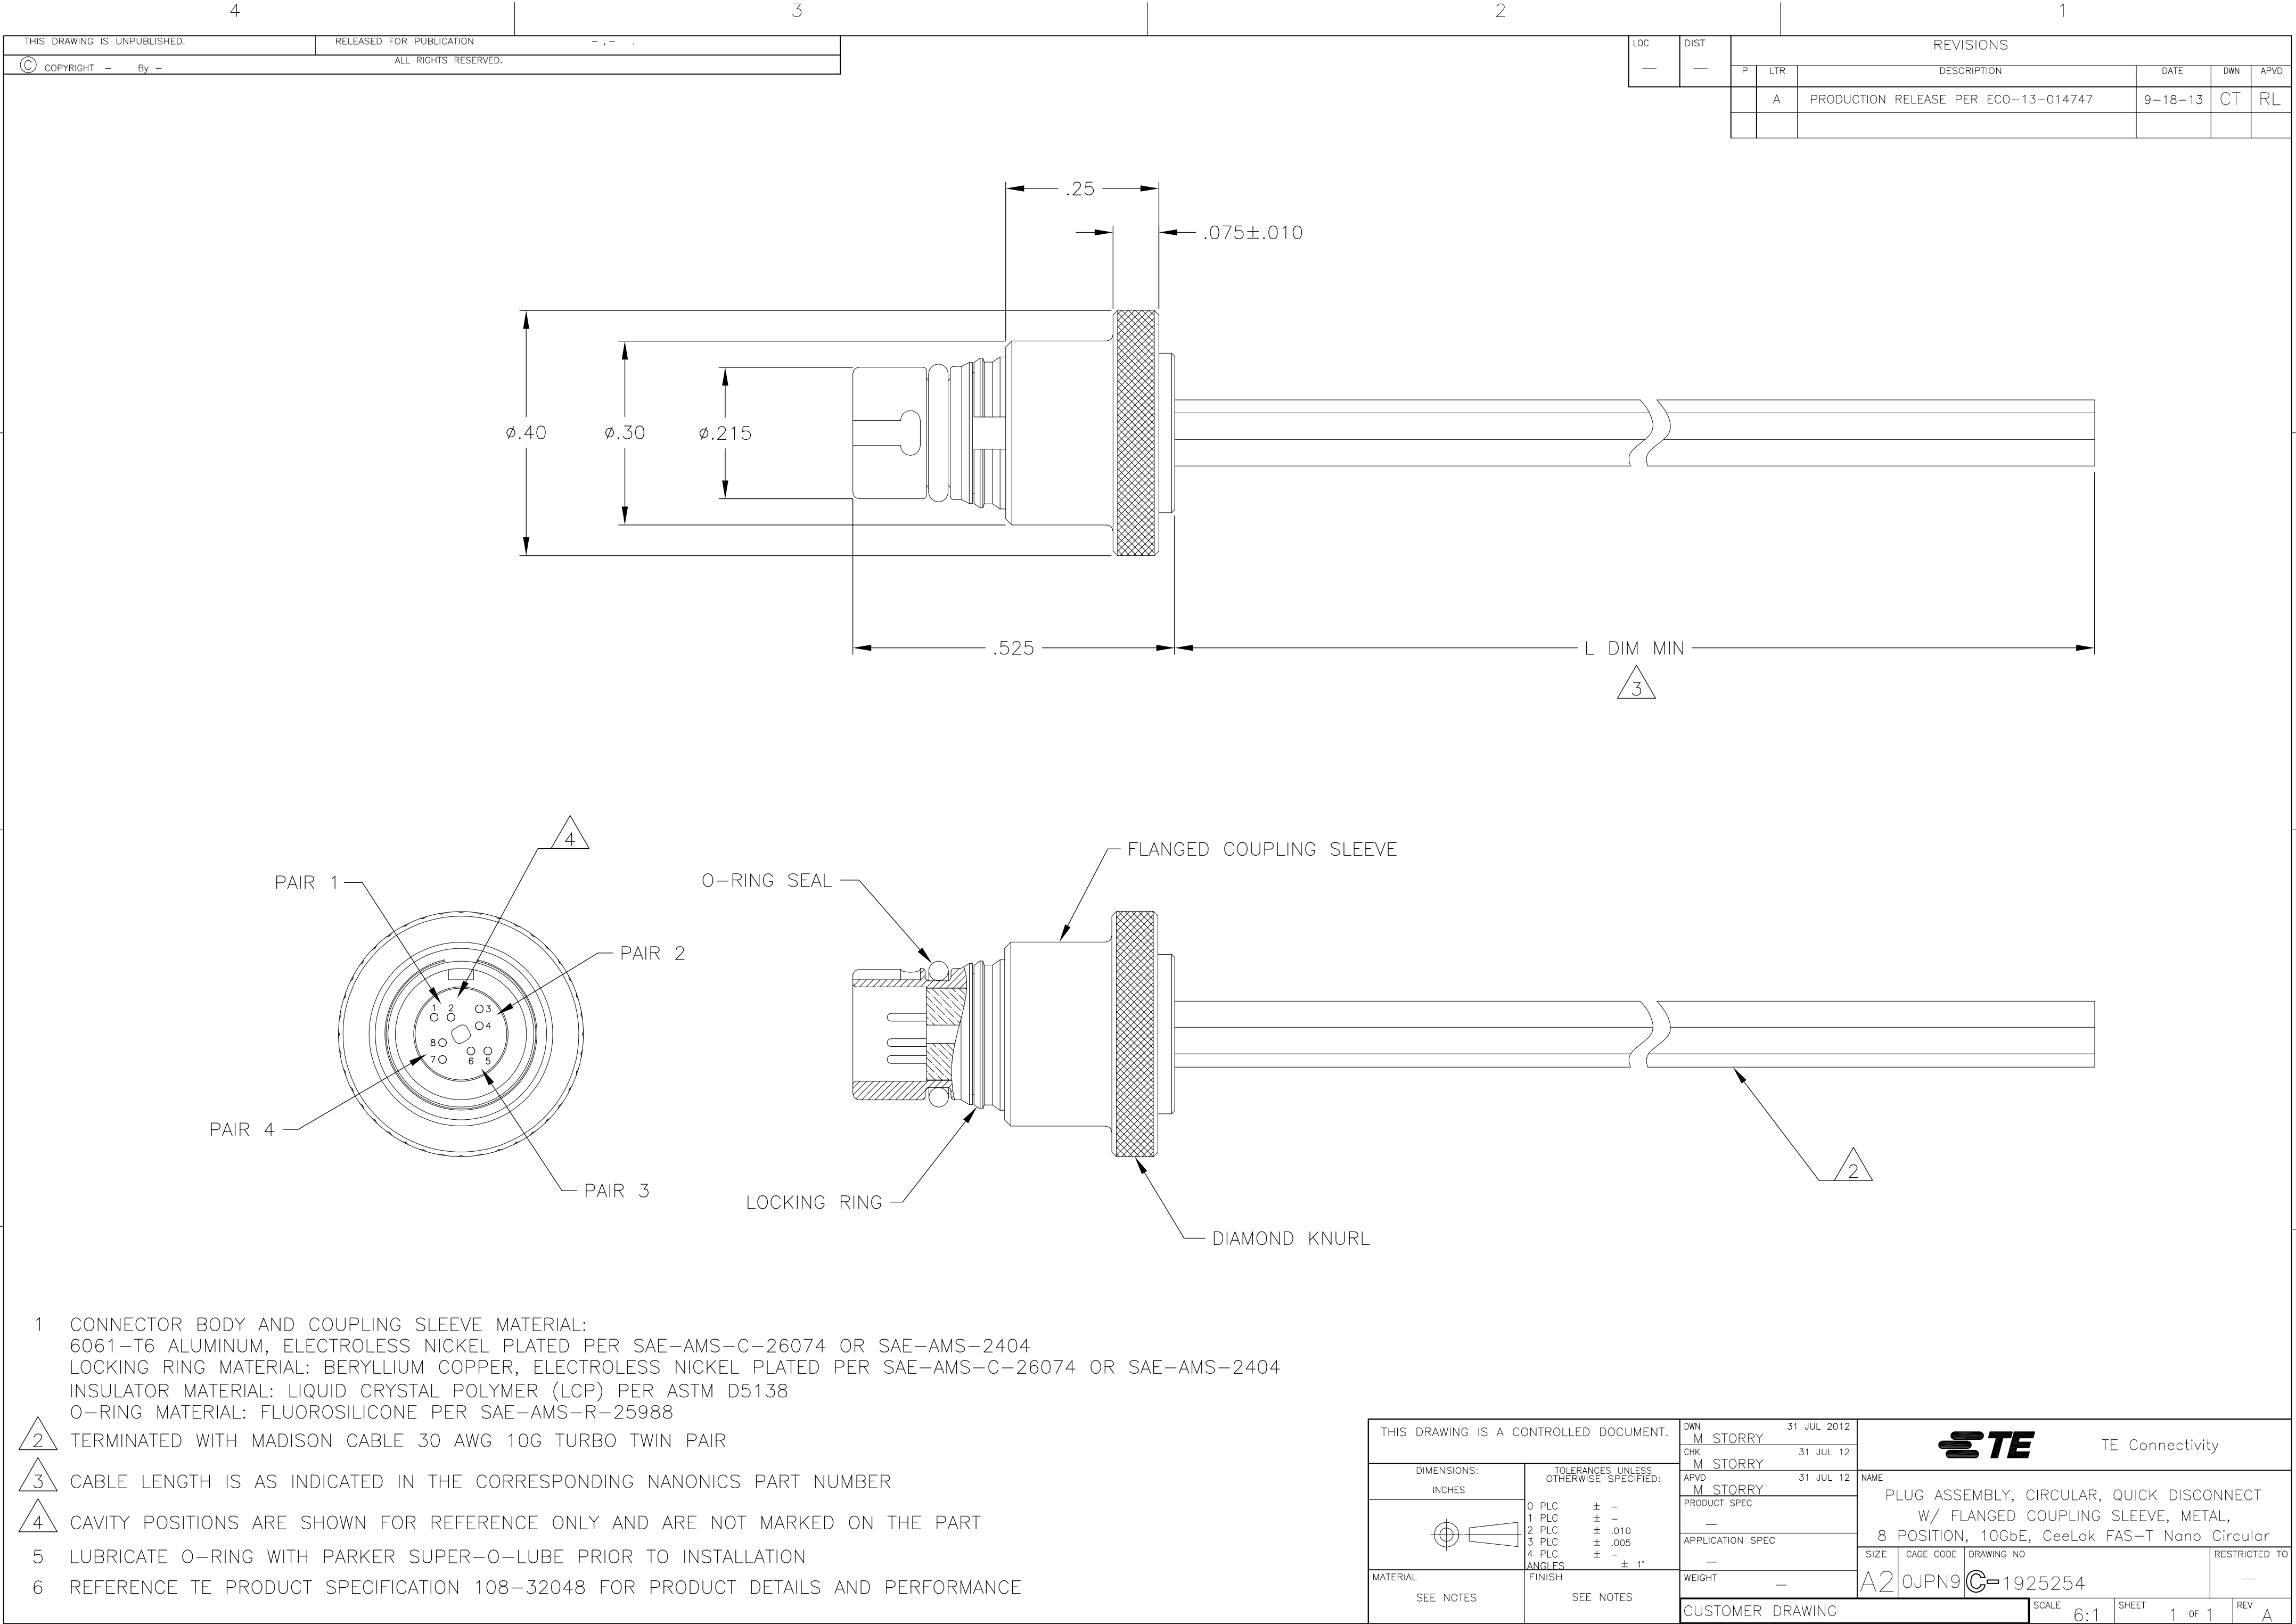




- 1 CONNECTOR BODY AND COUPLING SLEEVE MATERIAL:
6061-T6 ALUMINUM, ELECTROLESS NICKEL PLATED PER SAE-AMS-C-26074 OR SAE-AMS-2404
LOCKING RING MATERIAL: BERYLLIUM COPPER, ELECTROLESS NICKEL PLATED PER SAE-AMS-C-26074 OR SAE-AMS-2404
INSULATOR MATERIAL: LIQUID CRYSTAL POLYMER (LCP) PER ASTM D5138
O-RING MATERIAL: FLUOROSILICONE PER SAE-AMS-R-25988
- 2 TERMINATED WITH MADISON CABLE 30 AWG 10G TURBO TWIN PAIR
- 3 CABLE LENGTH IS AS INDICATED IN THE CORRESPONDING NANONICS PART NUMBER
- 4 CAVITY POSITIONS ARE SHOWN FOR REFERENCE ONLY AND ARE NOT MARKED ON THE PART
- 5 LUBRICATE O-RING WITH PARKER SUPER-O-LUBE PRIOR TO INSTALLATION
- 6 REFERENCE TE PRODUCT SPECIFICATION 108-32048 FOR PRODUCT DETAILS AND PERFORMANCE

LOC		DIST		REVISIONS					
—		—		P	LTR	DESCRIPTION	DATE	DWN	APVD
			A	PRODUCTION RELEASE PER ECO-13-014747			9-18-13	CT	RL

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M STORRY 31 JUL 2012		 TE Connectivity			
		CHK M STORRY 31 JUL 12					
DIMENSIONS: INCHES		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		APVD M STORRY 31 JUL 12		NAME	
		0 PLC ± -		PRODUCT SPEC		PLUG ASSEMBLY, CIRCULAR, QUICK DISCONNECT W/ FLANGED COUPLING SLEEVE, METAL, 8 POSITION, 10GbE, CeeLok FAS-T Nano Circular	
		1 PLC ± -		—			
		2 PLC ± .010		APPLICATION SPEC			
		3 PLC ± .005		—			
		4 PLC ± -				SIZE	
		ANGLES ± 1°				CAGE CODE	
MATERIAL		FINISH		WEIGHT —		DRAWING NO	
SEE NOTES		SEE NOTES		A2		0JPN9	
				CUSTOMER DRAWING		C=1925254	
						RESTRICTED TO	
						—	
						SCALE 6:1	
						SHEET 1 of 1	
						REV A	