




CUSTOMER No. :	REV .	CATEGORY	IN LINE WITH THE TYPE		PAGE	REV .	ECN&ECR No.	DESCRIPTION	DSN	DATE
			YES	NO		C1	NA	Initial Drawing	XU	2022.05.25
		NEW ENERGY VEHICLE PRODUCTS		√						
		INDUSTRIAL PRODUCTS	√							

	RoHS	✓		
Panel Cut-Out	REACH		✓	
	Halogen-Free		✓	
	CALIFORNIA 65		✓	

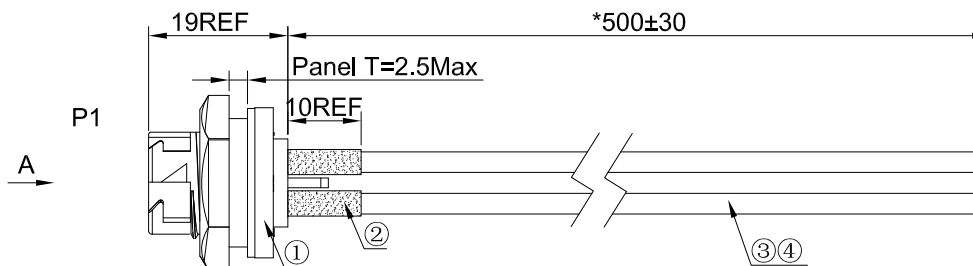

Panel Cut-Out



P/N: 22002535-01

SPECIFICATIONS:

- 1.INSULATION RESISTANCE: 10MΩ@500VDC/0.01S.
- 2.VOLTAGE RATING: 600V.
- 3.CURRENT RATING: 10A.
- 4.OPERATION TEMPERATURE: -10℃~+105℃.
- 5.WATERPROOF IPX7(MATED).
- 6.RoHS COMPLIANT.

4	900-00101-00087	A/C	M	UL1015 18AWG PVC 105°C 600V RED OD2.8
3	900-00101-00032	A/C	M	UL1015 18AWG PVC 105°C 600V BLACK OD2.8
2	504-00049-00	A/C	M	ADHESIVE HEAT SHRINK TUBE OD3.2
1	22002535-01	1	PC	STANDARD SERIES 2PIN PANEL MOUNT WITH MALE PIN(4 LOCKS -501)
ITEM	PART NO	QTY	UNIT	DESCRIPTION

UNIT: mm		DESCRIPTION: STANDARD SERIES 2PIN PANEL MOUNT WITH MALE PIN(4 LOCKS -501) L=500MM		
未注线性和角度尺寸公差 UNSPECIFIED TOLERANCE		SCALE: 1:1		SHEET: 1 OF 1
GB/T 1804-M		REV.: C1	SIZE: A4	ASME Y14.5-2009

CHOGORI®

深圳乔合里科技股份有限公司

PART No.:	DRAWN BY:	XU	TECHNICS:	
11C03622051304	PROOFREADED BY:		QUALITY:	
MATERIAL:	CHECKED BY:		APPROVED BY:	
MOLD No.:	STANDARDISATION:			