

# P | Cabling

## Data sheet

**M12 Sensor/actuator cable, A-coded, 1.0 m,  
M12 jack straight - free line end,  
unshielded, 5-pole, PUR**

Page 1/6

P/N

142MDA20010

EAN 4251394646800


2022/03/14

Version: D


## Illustrations



Dimensional drawing

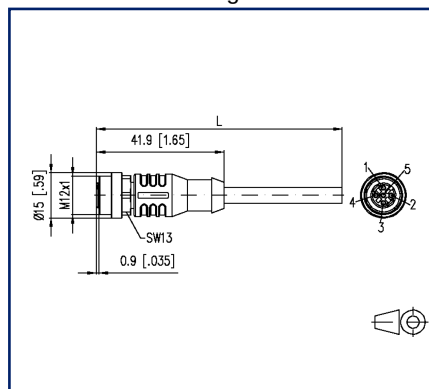

Wiring diagram

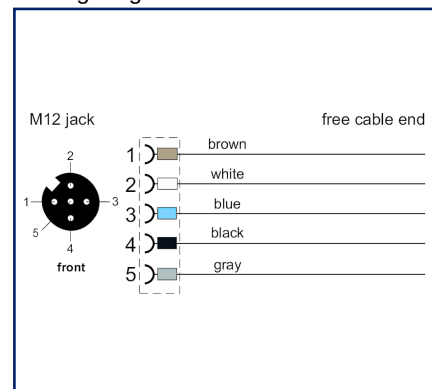

See enlarged drawings at the end of document

## Product specification

Flexible, silicone- and halogen-free control cable with high mechanical strength. The cable is resistant to chemicals, hydrolysis and microbes. The drag-chain application is possible at a bending radius of minimum 10xd. Due to its weld-field immunity, the cable is very well suited for the flexible application in robotics, machine tools and metal-cutting production. The cables meet the UL and CSA (UL10493/20549; cULus) requirements. Special features: flame retardant, seawater resistant, recyclable, LABS free, RoHs compliant, acid and alkali resistant, ozone resistant, UV resistant, hydrolysis proof, drag chain resistant, torsion resistant, welding sparks resistant, halogen free, silicone free, oil resistant

- Standard variants: 1.0 m, 2.0 m, 5.0 m, 10.0 m.
- Other cable lengths on request.



# P | Cabling

## Data sheet

Page 2/6

**M12 Sensor/actuator cable, A-coded, 1.0 m,  
M12 jack straight - free line end,  
unshielded, 5-pole, PUR**

**P/N**  
**142MDA20010**  
**EAN 4251394646800**  
2022/03/14  
Version: D

## Technical Data

### General Data

|                                     |                                               |
|-------------------------------------|-----------------------------------------------|
| Fields of application               | Industrial Ethernet                           |
| Design                              | Sensor/actuator connection cable M12, A-coded |
| Shielding                           | unshielded                                    |
| Transmission technology             | Copper                                        |
| Color coding fiber/ wire(s)         | brown, white, blue, black, gray               |
| Color                               | black                                         |
| Dimensions                          |                                               |
| Dimension - Interface 1 (L x W x H) | 41.9 mm x 15 mm x 15 mm                       |
| Dimension - Interface 1 (L x W x H) | 1.65 in. x 0.591 in. x 0.591 in.              |
| Cable length (m)                    | 1 m                                           |
| Cable length (ft)                   | 3.28 ft                                       |
| Labeling option                     | identification label carrier                  |

### Connections/interfaces

|                                               |                      |
|-----------------------------------------------|----------------------|
| Connector technology interface 1              | M12-jack             |
| Connector technology interface 2              | free line end        |
| Coding interface 1                            | A-coded              |
| Number of positions/contacts interface 1      | 5                    |
| Termination data, stranded wire (min. - max.) |                      |
| Conductor cross section, stranded wire        | AWG 22/42            |
| Conductor cross section, stranded wire        | 0.34 mm <sup>2</sup> |
| Stranded wire structure                       | 42x0.10mm            |
| Cable sheath diameter (min. - max.)           |                      |
| Cable sheath diameter                         | 5.2 mm               |
| Cable sheath diameter                         | 0.205 in.            |

### Electrical characteristics

|                           |               |
|---------------------------|---------------|
| Current carrying capacity | 4 A at 40 °C  |
| Rated voltage             | 60 V          |
| Insulation resistance     | min. 100 MOhm |



# P | Cabling

## Data sheet

Page 3/6

**M12 Sensor/actuator cable, A-coded, 1.0 m,  
M12 jack straight - free line end,  
unshielded, 5-pole, PUR**

P/N  
142MDA20010  
EAN 4251394646800  
2022/03/14  
Version: D

## Technical Data

### Mechanical data

|                                  |                               |
|----------------------------------|-------------------------------|
| Life - Number of mating cycles   | min. 100                      |
| Torsion                          | +/-180°/m, < 1 million cycles |
| Maximum operating bending radius | 52 mm                         |
| Alternating bending radius       | 52 mm                         |
| acceleration                     | 5 m/s <sup>2</sup>            |

### Materials and material properties

|                                           |                                                                                        |
|-------------------------------------------|----------------------------------------------------------------------------------------|
| Material - Conductor                      | Cu (copper)                                                                            |
| Material - Conductor Insulation           | polypropylene                                                                          |
| Material - Cable jacket                   | PUR                                                                                    |
| Material - Body interface 1               | Plastics                                                                               |
| Material - Protective housing interface 1 | FPM/FKM                                                                                |
| Material - Contact interface 1            | CuSn (tin bronze)                                                                      |
| Material - Contact finish interface 1     | Au (gold)                                                                              |
| Material - Contact carriers interface 1   | Plastics                                                                               |
| Material - Union nut interface 1          | CuZnPb (brass)                                                                         |
| Material - Union nut finish interface 1   | Ni (nickel)                                                                            |
| Flame retardancy                          | yes                                                                                    |
| Halogen free                              | yes                                                                                    |
| Silicone free                             | no paint wetting interfering substances (LaBS) in the process chain                    |
| LaBS Note                                 | subsequent contamination possible due to handling and possible storage in your company |
| Oil resistance                            | yes                                                                                    |
| UV-resistance                             | yes                                                                                    |
| drag chain suitable                       | yes                                                                                    |
| torsional                                 | yes                                                                                    |
| RoHS                                      | compliant                                                                              |
| REACH                                     | compliant                                                                              |
| REACH - substance (SVHC)                  | Lead / 7439-92-1                                                                       |



# P | Cabling

## Data sheet

Page 4/6

**M12 Sensor/actuator cable, A-coded, 1.0 m,  
M12 jack straight - free line end,  
unshielded, 5-pole, PUR**

P/N

142MDA20010

EAN 4251394646800

2022/03/14

Version: D

## Technical Data

### Environmental conditions

Temperature (min. - max.)

Temperature - Operating °C -50 °C - 90 °C

Temperature - Operating °F -58 °F - 194 °F

Temperature - Installation °C -30 °C - 90 °C

Temperature - Installation °F -22 °F - 194 °F

Temperature - drag chain °C -25 °C - 60 °C

Temperature - drag chain °F -13 °F - 140 °F

Particulate ingress interface 1 IP6X when plugged in

Liquid ingress/immersion interface 1 IPX5, IPX7, IPX8 when plugged in

Pollution degree interface 1 3

### Approvals

CE compliant

UL listed (file no.) Approval pending

### Standards/Regulations

Connectors for electronic equipment

circular connector DIN EN 61076-2-101

### Classifications

ETIM 5.0 EC001855

ETIM 6.0 EC001855

ETIM 7.0 EC001855

ETIM 8.0 EC001855

### Packing details

Type of packaging 1 pc(s) / plastic bag



# P | Cabling

## Data sheet

**M12 Sensor/actuator cable, A-coded, 1.0 m,  
M12 jack straight - free line end,  
unshielded, 5-pole, PUR**

Page 5/6

P/N

142MDA20010


EAN 4251394646800

2022/03/14


Version: D

## Illustrations

### Dimensional drawing

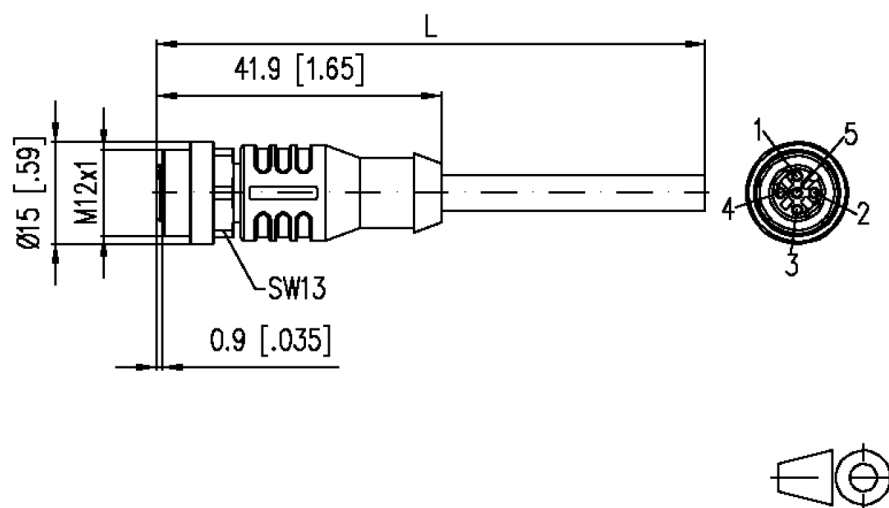

### Wiring diagram

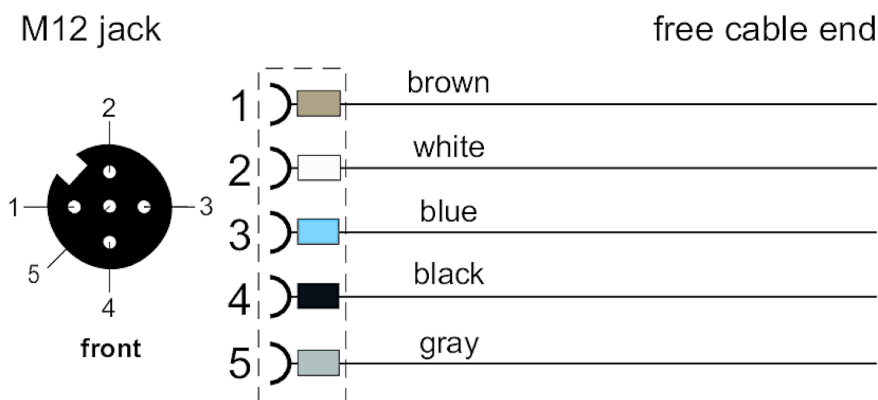

# P | Cabling

## Data sheet

**M12 Sensor/actuator cable, A-coded, 1.0 m,  
M12 jack straight - free line end,  
unshielded, 5-pole, PUR**

Page 6/6

P/N

142MDA20010

EAN 4251394646800

2022/03/14

Version: D

## Illustrations

### Principle diagram

