


CUSTOMER PRINT

PART NUMBER: CA6C806SXXX90


- NOTES:
- 1. FINISHED PRODUCT TO BE COILED
 - 2. OVERMOLD BOOT MATERIAL: PVC, BLACK
 - 3. ELECTRICAL TEST: 100% CONTINUITY
 - 4. ALL DIMENSIONS ARE REFERENCE EXCEPT THOSE WITH A TOLERANCE

ASS'Y P/N	"X" DIM
CA6C806S03990	3 FT. 3 1/2 IN. ±2 IN. [1M ±50.8mm]
CA6C806S07990	6 FT. 7 IN. ±2 IN. [2M ±50.8mm]
CA6C806S19790	16 FT. 5 IN. ±4 IN. [5M ±101.6mm]
CA6C806S39490	32 FT. 9 3/4 IN. ±8 IN. [10M ±203.2mm]
CA6C806SXXX90	

CABLE LENGTH IN INCHES

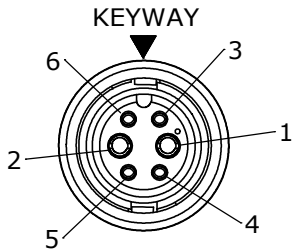

END "A"
FACE VIEW

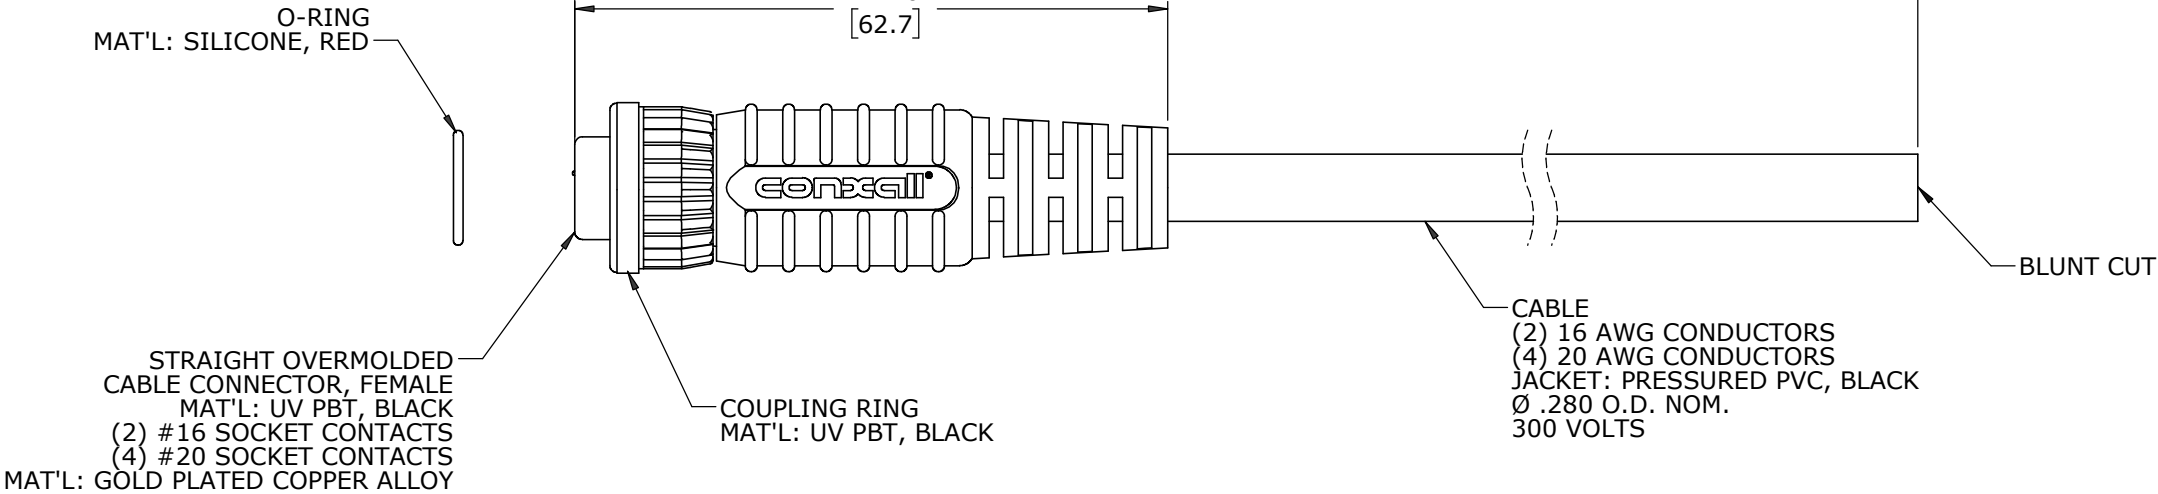

DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS UNLESS INDICATED

WIRE COLOR CODE					
POS. 1	POS. 2	POS. 3	POS. 4	POS. 5	POS. 6
BLK	WHT	RED	BLU	GRN	YEL
16 AWG	16 AWG	20 AWG	20 AWG	20 AWG	20 AWG

CUSTOMER APPROVAL

THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT /INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.

APPROVED BY: _____
DATE: _____

RoHS COMPLIANT

A	MA	07-28-21	DRAWING CREATED PER DOR 21-109361DS		
REV.	INIT.	DATE	DESCRIPTION		
	MA	07-28-21	ORIG. DRAWN BY: MA CHECKED BY:	 601 E. WILDWOOD VILLA PARK, IL 60181	
ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF "CONXALL CORPORATION". UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED.			APPROVED BY:		
ALL UNITS ARE IN FEET, INCHES, FRACTION OF INCHES AND DECIMALS.			SCALE NTS SIZE B SHEET 1 OF 1	TITLE: CABLE ASSEMBLY 2#16/4#20 SOCKET CONTACTS MINI-CON-X MIXED SIGNAL FLEX OM STANDARD PRODUCT	
FILE: CA6C806SXXX90 DIRECTORY: SLW			PART NUMBER: CA6C806SXXX90		REV A