

CUSTOMER PRINT



PART NUMBER: CARA16280XSXXX90

- NOTES:
- 1. FINISHED CABLE ASSEMBLY TO BE COILED
 - 2. OVERMOLD BOOT MATERIAL: PVC, BLACK
 - 3. ELECTRICAL TEST: 100% CONTINUITY

ASS'Y P/N	NO. OF POSITION	"X" DIM.
CARA162802S07990	2 POS.	6 FT. 7 IN. ± 2 IN. [2M]
CARA162803S07990	3 POS.	
CARA16280XSXXX90		

CABLE LENGTH IN "INCHES"

NO OF POSITIONS

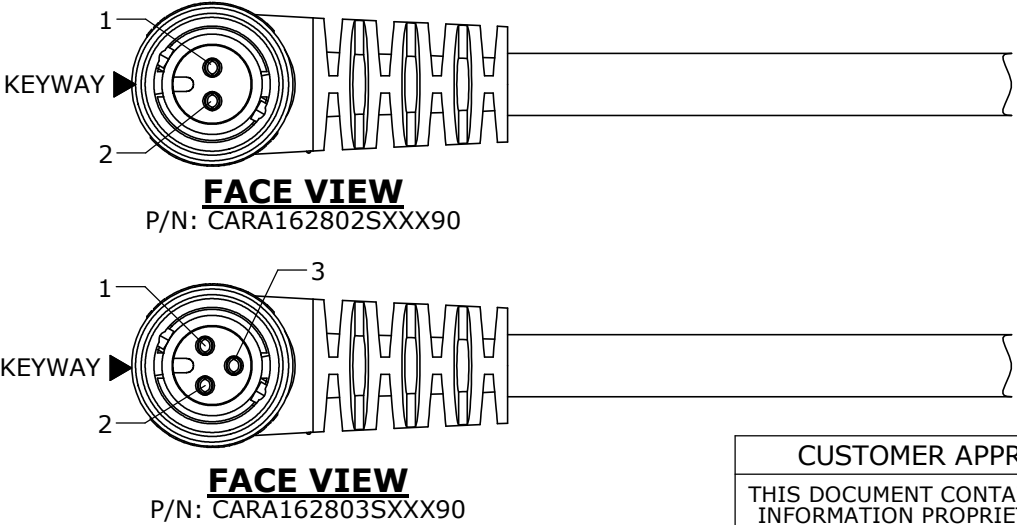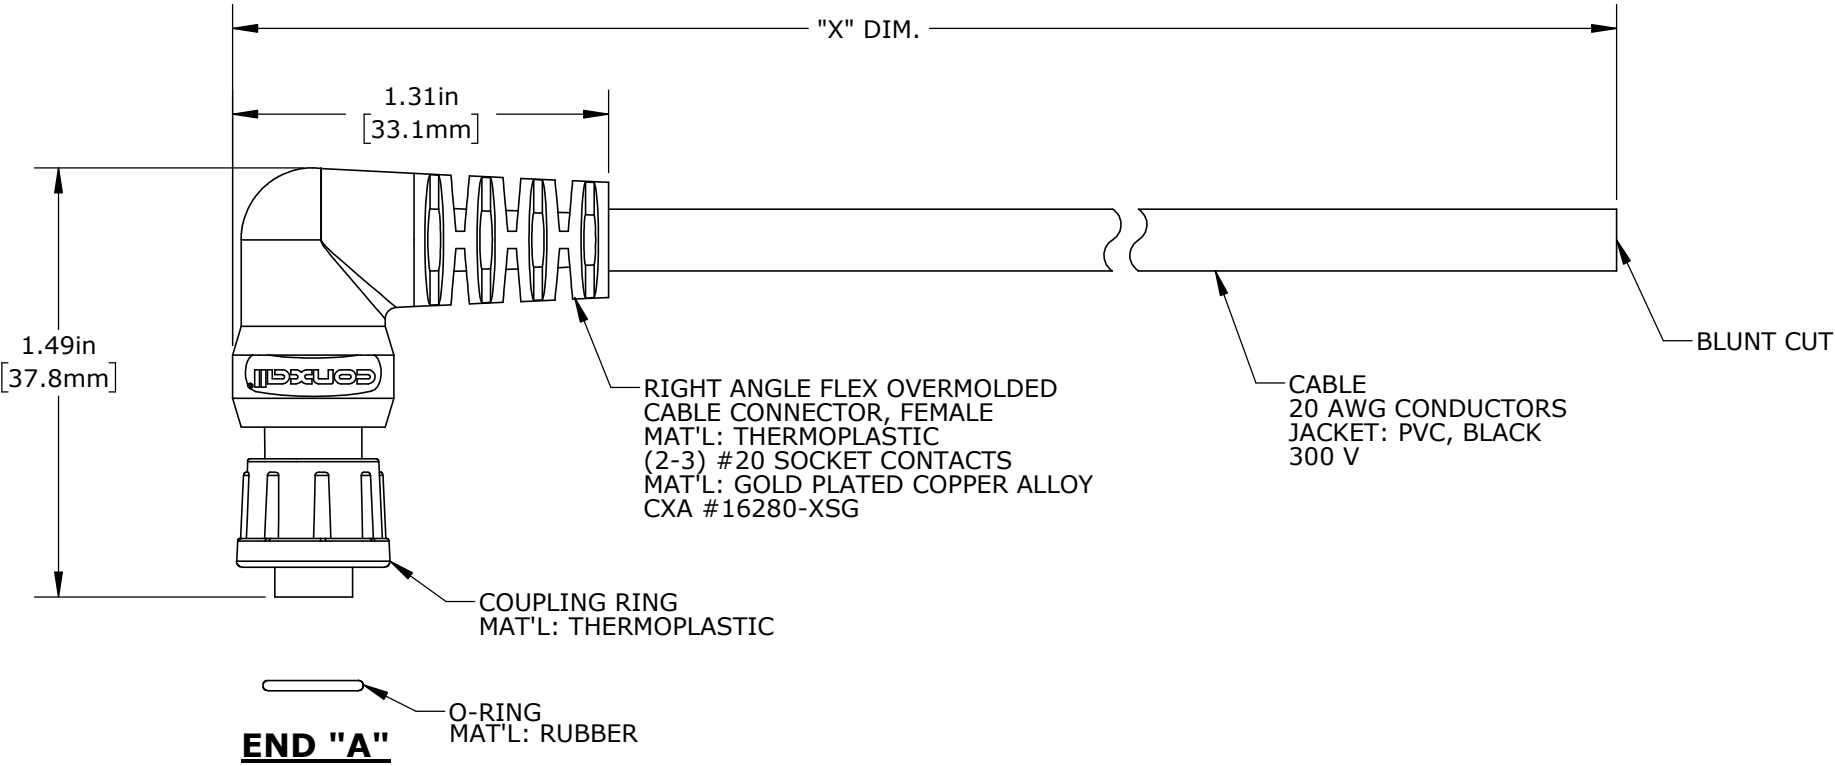

DIMENSIONS IN BRACKET [] ARE METRIC.

CUSTOMER APPROVAL

THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT /INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.

APPROVED BY: _____

DATE: _____

RoHS COMPLIANT

B	AB	11-03-20	NEW FLEX OVERMOLD PER DOR 19-SQ104238JS	
A	AN	11-07-16	DRAWING CREATED PER DOR 16-7663JP	
REV.	INIT.	DATE	DESCRIPTION	
ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF "CONXALL CORPORATION". UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED.			ORIG. DRAWN BY: AN	DATE: 11-07-16
			CHECKED BY:	
ALL UNITS ARE IN FEET, INCHES, FRACTION OF INCHES AND DECIMALS.			APPROVED BY:	TITLE: CABLE ASSEMBLY (2-3) #20 SOCKET CONTACTS MICRO-CON-X, R.ANGLE STANDARD PRODUCT
			SCALE NTS	SIZE B
			SHEET 1 OF 1	
FILE: CARA16280XSXXX90			DIRECTORY: SLW	PART NUMBER: CARA16280XSXXX90
= CRITICAL CHARACTERISTIC FLAG PER SPEC. XXXX				REV B