

 **THIS PRODUCT MANUFACTURED
WITH LEAD-FREE PROCESSING**

ACP-12-XX-X-XX.XX-X-XX-M-X

LEAD STYLE
-01: 4 POS (1.0 TERM/SKT), 24 AWG
-02: 5 POS (1.0 TERM/SKT), 24 AWG
-03: 6 POS (0.5 TERM/SKT), 28 AWG
-04: 8 POS (0.5 TERM/SKT), 28 AWG
-05: 6 POS COMBO
(2x1.0 TERM/SKT), 24 AWG
(4x0.5 TERM/SKT), 28 AWG

PLATING
-G: 10µ" GOLD IN
CONTACT AREA
-H: 30µ" GOLD IN
CONTACT AREA

KEYING FEATURE
(SEE NOTE 4)(SEE SHEET 2)
-1: ORANGE
-2: GREEN
-3: BLUE
-4: YELLOW

STYLE
-M: METAL

END 2
-T: TERMINAL
-S: SOCKET
-BC: BLUNT CUT

END 1
-T: TERMINAL
-S: SOCKET (NOT AVAILABLE
WITH END 2 -T)

ASSEMBLED LENGTH
XX.XX (IN METERS)
(00.25 METER MIN TO 50.00 METER MAX)

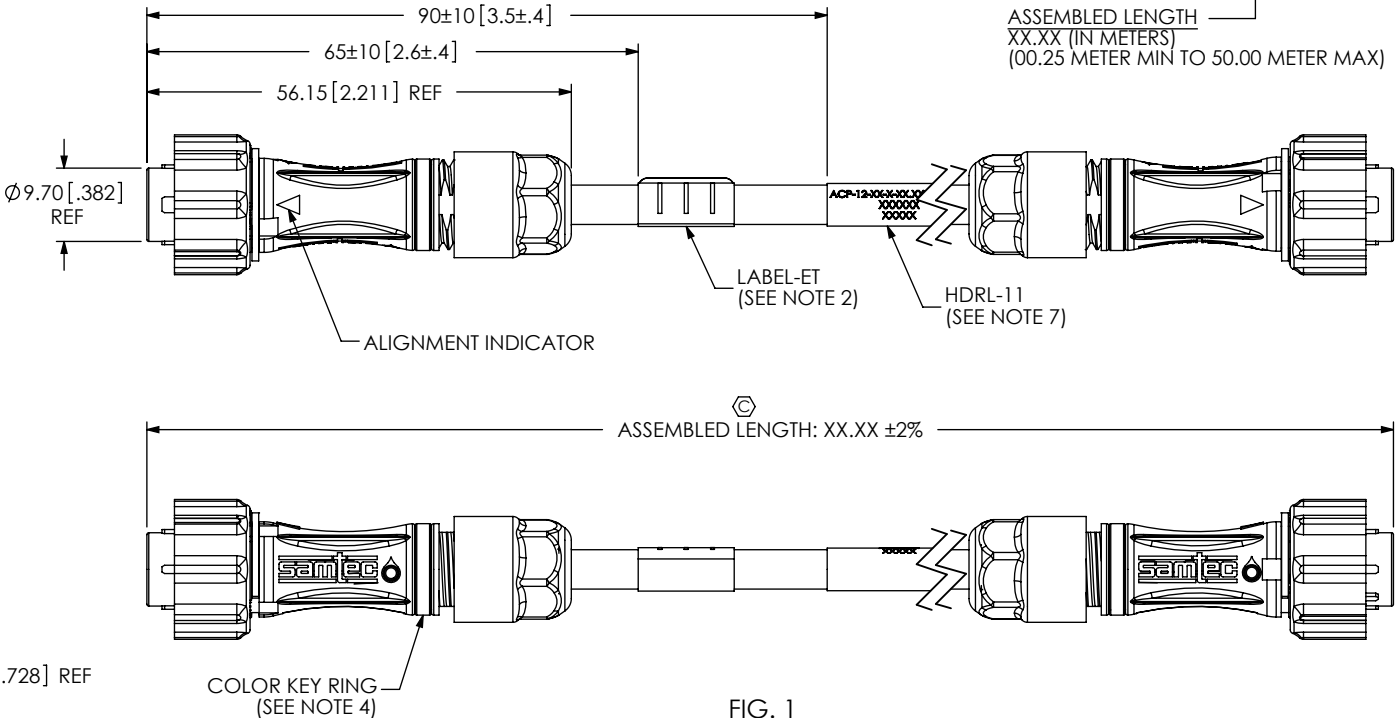


FIG. 1
ACP-12-02-X-XX.XX-T-T-M-1 SHOWN

NOTES:

1.  REPRESENTS A CRITICAL DIMENSION.
2. ASSEMBLY TO BE 100% TESTED FOR CONTINUITY, ISOLATION, & HI-POT AT 300V.
(1) LABEL-ET TO BE APPLIED AFTER FINAL ELECTRICAL TEST.
3. ASSEMBLIES TO BE BULK PACKAGED.
4. KEYING FEATURE DETERMINES COLOR OF KEY RING
AND DUSTCAP LANYARD IF APPLICABLE.
5. SIGNAL MAPPING IS 1 TO 1, 2 TO 2, 3 TO 3, etc..
6. REFER TO DCA-ACP-12-M-X PRINT FOR DUST CAP.
7. PLACE HDRL-11 (LABEL) ON CABLE WHERE SHOWN. LABEL TO CONTAIN
LINE 1 - PART NUMBER "ACP-12-XX-X-XX.XX-X-XX-M-X"
LINE 2 - SHOP ORDER NUMBER "XXXXXX"
LINE 3 - DATE CODE "XXXXX"
8. ACCN-12-M TORQUE SPEC: 15 IN-LBS
9. PARTS TO BE BUILT & INSPECTED TO IPC-A-620 CLASS 2.

F:\DWG\MISC\MKTG\ACP-12-XX-X-XX.XX-X-XX-M-X-MKT.SLDDRW

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN MILLIMETERS.
TOLERANCES ARE:
DECIMALS ANGLES
X.X: ±0.3 [.01]
X.XX: ±0.13 [.005]
X.XXX: ±0.051 [.0020]

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS INFORMATION
CONFIDENTIAL AND PROPRIETARY TO
SAMTEC, INC. AND SHALL NOT BE REPRODUCED
OR TRANSFERRED TO OTHER DOCUMENTS OR
DISCLOSED TO OTHERS OR USED FOR ANY
PURPOSE OTHER THAN THAT WHICH IT WAS
OBTAINED WITHOUT THE EXPRESSED WRITTEN
CONSENT OF SAMTEC, INC.

MATERIAL: DO NOT SCALE DRAWING
SHELLS/LOCKING SLEEVE/NUT: ZINC ALLOY
INSULATOR: PBT, COLOR: BLACK
COLOR RING: SILICONE
GROMMET: NITRILE
GROMMET CAGE: NYLON, COLOR: BLACK
TERMINALS: BRASS
CONTACTS: BRASS/BeCu

SHEET SCALE: 1:1

samtec

520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail: info@SAMTEC.com code 55322


DESCRIPTION:
ACCLIMATE CIRC. CABLE ASSEMBLY

DWG. NO.
ACP-12-XX-X-XX.XX-X-XX-M-X


BY: D.SCHMELZ 09/16/2010 SHEET 1 OF 4

-T END OPTIONS


-01: 4 POS
($\varnothing$ 1.0 TERMINALS)




-02: 5 POS
($\varnothing$ 1.0 TERMINALS)




-03: 6 POS
($\varnothing$ 0.5 TERMINALS)



-04: 8 POS
($\varnothing$ 0.5 TERMINALS)




-05: 6 POS COMBO
(2x $\varnothing$ 1.0 TERMINALS)
(4x $\varnothing$ 0.5 TERMINALS)




-S END OPTIONS


-01: 4 POS
($\varnothing$ 1.0 SOCKETS)




-02: 5 POS
($\varnothing$ 1.0 SOCKETS)




-03: 6 POS
($\varnothing$ 0.5 SOCKETS)




-04: 8 POS
($\varnothing$ 0.5 SOCKETS)




-05: 6 POS CPMBO
(2x $\varnothing$ 1.0 SOCKETS)
(4x $\varnothing$ 0.5 SOCKETS)



-1
(ORANGE KEY RING)

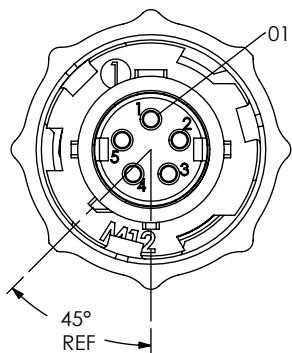


-2
(GREEN KEY RING)

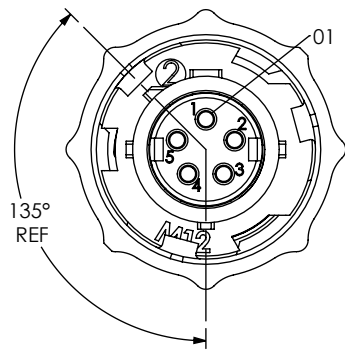


KEYING FEATURE
(SEE NOTE 4)


-3
(BLUE KEY RING)

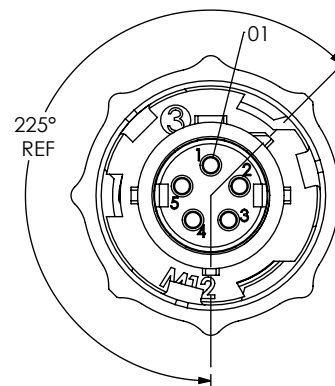

-4
(YELLOW KEY RING)

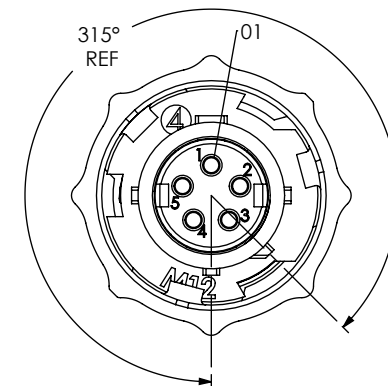

-BC END OPTION
ACP-12-01-X-XX.XX-T-BC-M-T SHOWN

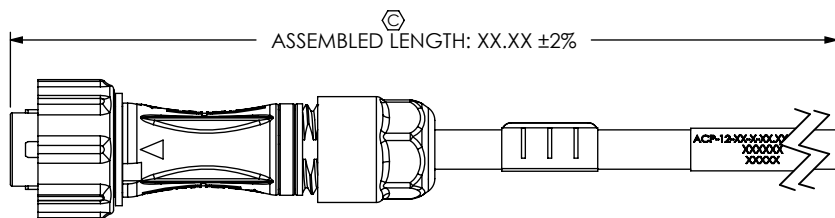

F:\DWG\MISC\MKTG\ACP-12-XX-X-XX.XX-X-XX-M-X-MKT.SLDDRW

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC.

DO NOT SCALE DRAWING

SHEET SCALE: 1.5:1

samtec

520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail: info@SAMTEC.com code 55322

DESCRIPTION: ACCLIMATE CIRC. CABLE ASSEMBLY

DWG. NO. ACP-12-XX-X-XX.XX-X-XX-M-X

BY: D.SCHMELZ 09/16/2010 SHEET 2 OF 4

IN-PROCESS 1
CUT SWBC-12-XX-O TO LENGTH

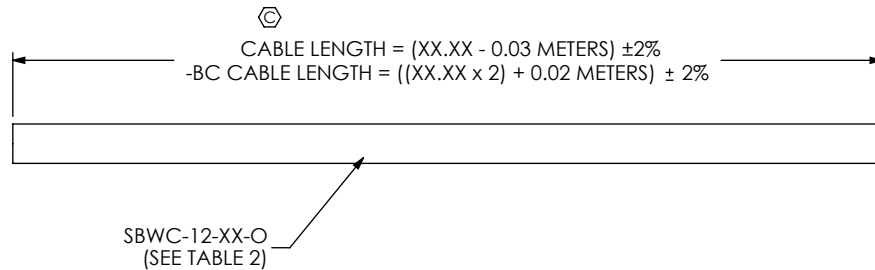


TABLE 2	
LEAD STYLES	SBWC PART #
-01	SBWC-12-01-O
-02	SBWC-12-02-O
-03	SBWC-12-03-O
-04	SBWC-12-04-O
-05	SBWC-12-05-O

IN-PROCESS 2
STRETCH ACCR-12-X OVER ACCFS-12-M-X UNTIL IT SEATS IN GROOVE
PUSH ACCLS-12-M ONTO ACCFS-12-M-X UNTIL IT BOTTOMS OUT AGAINST
FLANGE. SNAP ACCRT-12 (RETAINING RING) INTO GROOVE IN
ACCFS-12-M-X TO HOLD ACCLS-12-M IN PLACE



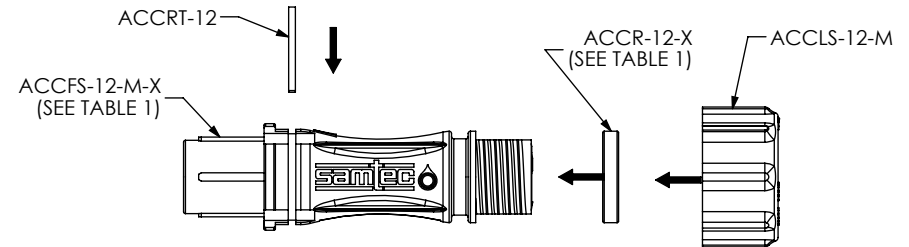


TABLE 1		
KEYING FEATURE	ACCFS-12-M-X	ACCR-12-X
-1	ACCFS-12-M-1	ACCR-12-1
-2	ACCFS-12-M-2	ACCR-12-2
-3	ACCFS-12-M-3	ACCR-12-3
-4	ACCFS-12-M-4	ACCR-12-4

IN-PROCESS 3
FEED SBWC-12-XX-O BUNDLED CABLE THROUGH ACCN-12-M,
ACCGC-12, ACCG-12-1-2, & ACCFS-12-M-X)

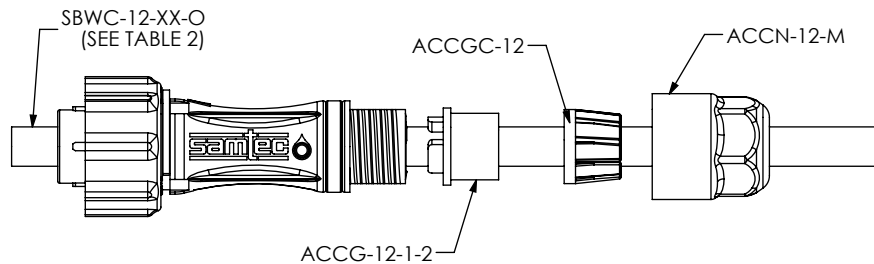

IN-PROCESS 4
STRIP OUTER JACKET & INNER WIRES TO DIMENSIONS
SHOWN, & PUSH ACCG-12-1-2 INTO ACCGC-12

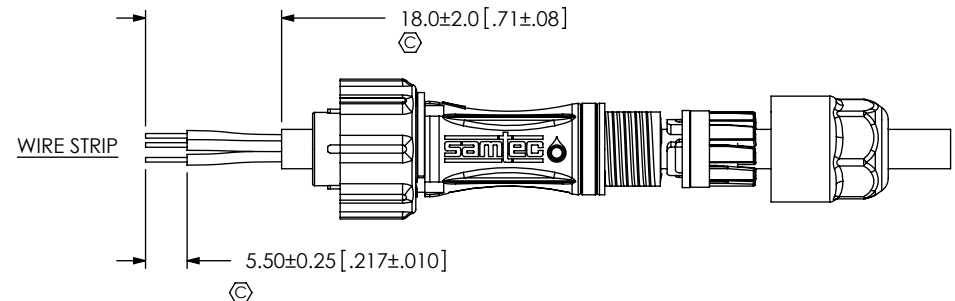

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS INFORMATION
CONFIDENTIAL AND PROPRIETARY TO
SAMTEC, INC. AND SHALL NOT BE REPRODUCED
OR TRANSFERRED TO OTHER DOCUMENTS OR
DISCLOSED TO OTHERS OR USED FOR ANY
PURPOSE OTHER THAN THAT WHICH IT WAS
OBTAINED WITHOUT THE EXPRESSED WRITTEN
CONSENT OF SAMTEC, INC.

DO NOT SCALE DRAWING

SHEET SCALE: 1:1

samtec

520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail: info@SAMTEC.com code 55322

DESCRIPTION:

ACCLIMATE CIRC. CABLE ASSEMBLY

DWG. NO.

ACP-12-XX-X-XX.XX-X-XX-M-X

BY: D.SCHMELZ 09/16/2010 SHEET 3 OF 4



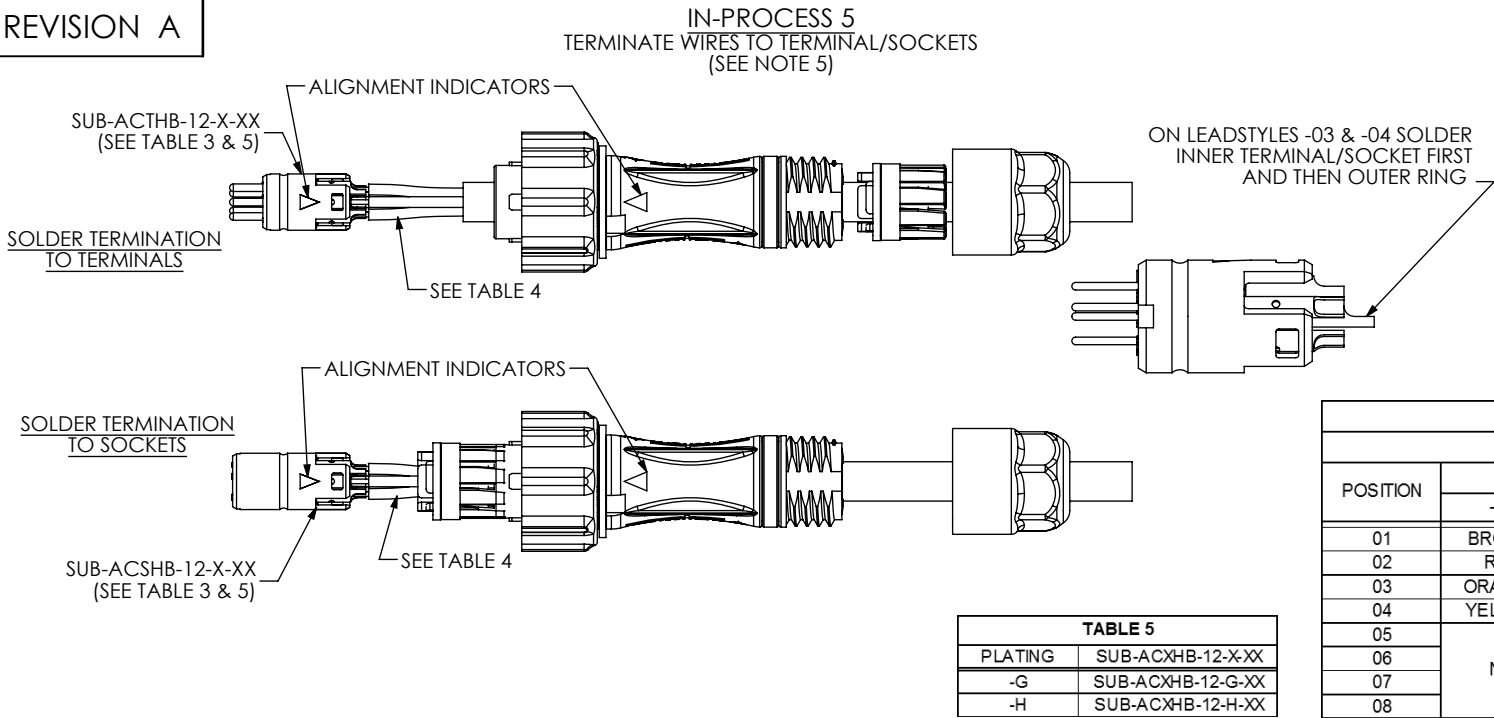


TABLE 3		
LEAD STYLE	END1/END 2	SUB-AC ^{XHB} -12-X-XX
-01	-T	SUB-AC ^{THB} -12-X-01
-02	-T	SUB-AC ^{THB} -12-X-02
-03	-T	SUB-AC ^{THB} -12-X-03
-04	-T	SUB-AC ^{THB} -12-X-04
-05	-T	SUB-AC ^{THB} -12-X-05
-01	-S	SUB-AC ^{SHB} -12-X-01
-02	-S	SUB-AC ^{SHB} -12-X-02
-03	-S	SUB-AC ^{SHB} -12-X-03
-04	-S	SUB-AC ^{SHB} -12-X-04
-05	-S	SUB-AC ^{SHB} -12-X-05

TABLE 4					
WIRE COLOR					
POSITION	LEAD STYLE				
	-01	-02	-03	-04	-05
01	BROWN	BROWN	BROWN	BROWN	BROWN
02	RED	RED	RED	RED	RED
03	ORANGE	ORANGE	ORANGE	ORANGE	ORANGE
04	YELLOW	YELLOW	YELLOW	YELLOW	YELLOW
05	NA	GREEN	GREEN	GREEN	GREEN
06		NA	BLUE	BLUE	BLUE
07			VIOLET	GRAY	NA
08					

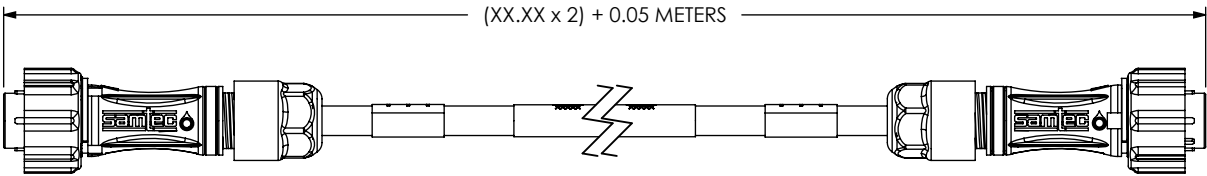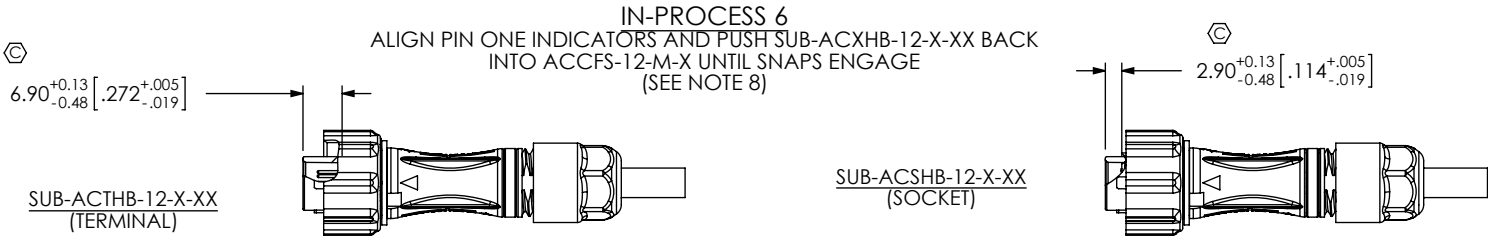

IN-PROCESS 7
(-BC END OPTION ONLY)
BUILD DOUBLE-ENDED INITIALLY FOR E-TEST,
APPLY LABEL-ET & HDRL-11 TO BOTH ENDS,
AND CUT CABLE IN HALF

PROPRIETARY NOTE
THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC.

DO NOT SCALE DRAWING

SHEET SCALE: 1:1

520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail: info@SAMTEC.com code 55322

DESCRIPTION:
ACCLIMATE CIRC. CABLE ASSEMBLY

DWG. NO.
ACP-12-XX-X-XX.XX-X-XX-M-X

BY: D.SCHMELZ 09/16/2010 | SHEET 4 OF 4