


ST-605
OVERMOLDED 5 PIN FEMALE TINI QG

CONTACTS - SPECIAL COPPER ALLOY, SILVER PLATED
INSULATOR - NATURAL (BROWN) THERMOPLASTIC
SHELL - COPPER ALLOY, NICKEL PLATED
OVERMOLD - BLACK THERMOPLASTIC.


ST-605
OVERMOLDED 5 PIN FEMALE TINI QG

CONTACTS - SPECIAL COPPER ALLOY, SILVER PLATED
INSULATOR - NATURAL (BROWN) THERMOPLASTIC
SHELL - COPPER ALLOY, NICKEL PLATED
OVERMOLD - BLACK THERMOPLASTIC.

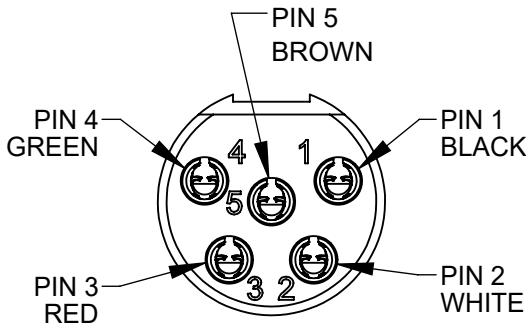

ST-605
FRONT MATING VIEW
BOTH ENDS

WIRING CHART STRAIGHT THRU WIRING		
ST-605	WIRE COLOR	ST-605
PIN 1	BLACK	PIN 1
PIN 2	WHITE	PIN 2
PIN 3	RED	PIN 3
PIN 4	GREEN	PIN 4
PIN 5	BROWN	PIN 5
SHELL	SHIELD/ DRAINWIRE	SHELL

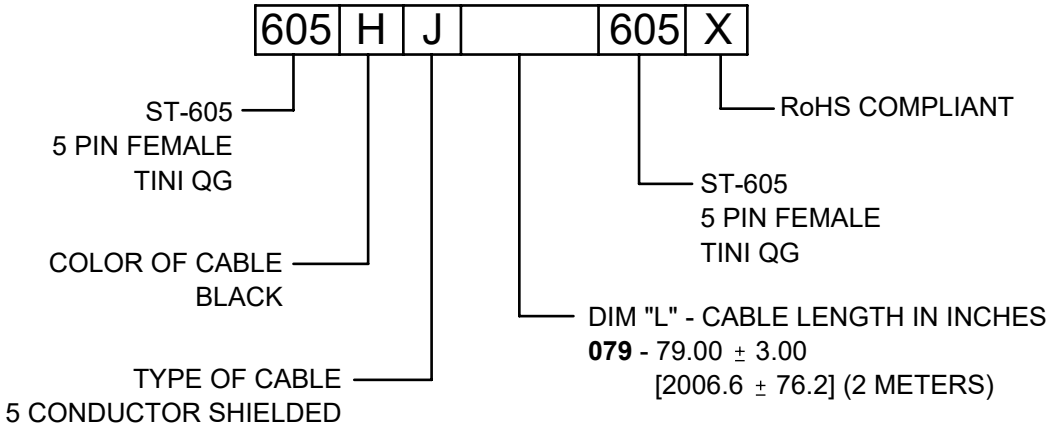

CUSTOMER DRAWING

NOTES:

1. THIS PRODUCT IS RoHS COMPLIANT.

					UNLESS OTHERWISE SPECIFIED 1. ALL DIMENSIONS IN INCHES [mm] - TWO PLACE DECIMALS ±0.02 [0.5] - THREE PLACE DECIMALS ±0.005 [0.13]	THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.						
						SIZE	WIDTH		MULT	LBS/M	TEMPER	
						FINISH					MATERIAL	
						SPEC No.					SPEC No.	
						FIRST USED ON			SCALE 1.5:1		Switchcraft®	
						DATE DRAWN	BY	CHKD	APVD			
A	28310	08/25/20	PC	TJK	7/28/20	AB	AB 7/28/20	TJK 8/10/20	SHEET 1 OF 1			
REV	ECO NUMBER	DATE	BY	APVD	NAMECABLE ASSEMBLY, DOUBLE ENDED 5 PIN FEMALE TINI QG, RoHS					PART No. 605HJ____605X	REV A	
REVISIONS					DO NOT SCALE DRAWING							