

CUSTOMER PRINT


PART NUMBER: CA6C806SPXXX90

NOTES:

- 1. FINISHED PRODUCT TO BE COILED
- 2. OVERMOLD BOOT MATERIAL: UV PBT, BLACK
- 3. ELECTRICAL TEST: 100% CONTINUITY
- 4. ALL DIMENSIONS ARE REFERENCE EXCEPT THOSE WITH A TOLERANCE

ASS'Y P/N	"X" DIM
CA6C806SP03990	3 FT. 3 1/2 IN. ±2 IN. [1M ±50.8mm]
CA6C806SP07990	6 FT. 7 IN. ±2 IN. [2M ±50.8mm]
CA6C806SP19790	16 FT. 5 IN. ±4 IN. [5M ±101.6mm]
CA6C806SP39490	32 FT. 9 3/4 IN. ±8 IN. [10M ±203.2mm]
CA6C806SPXXX90	

CABLE LENGTH IN "INCHES"

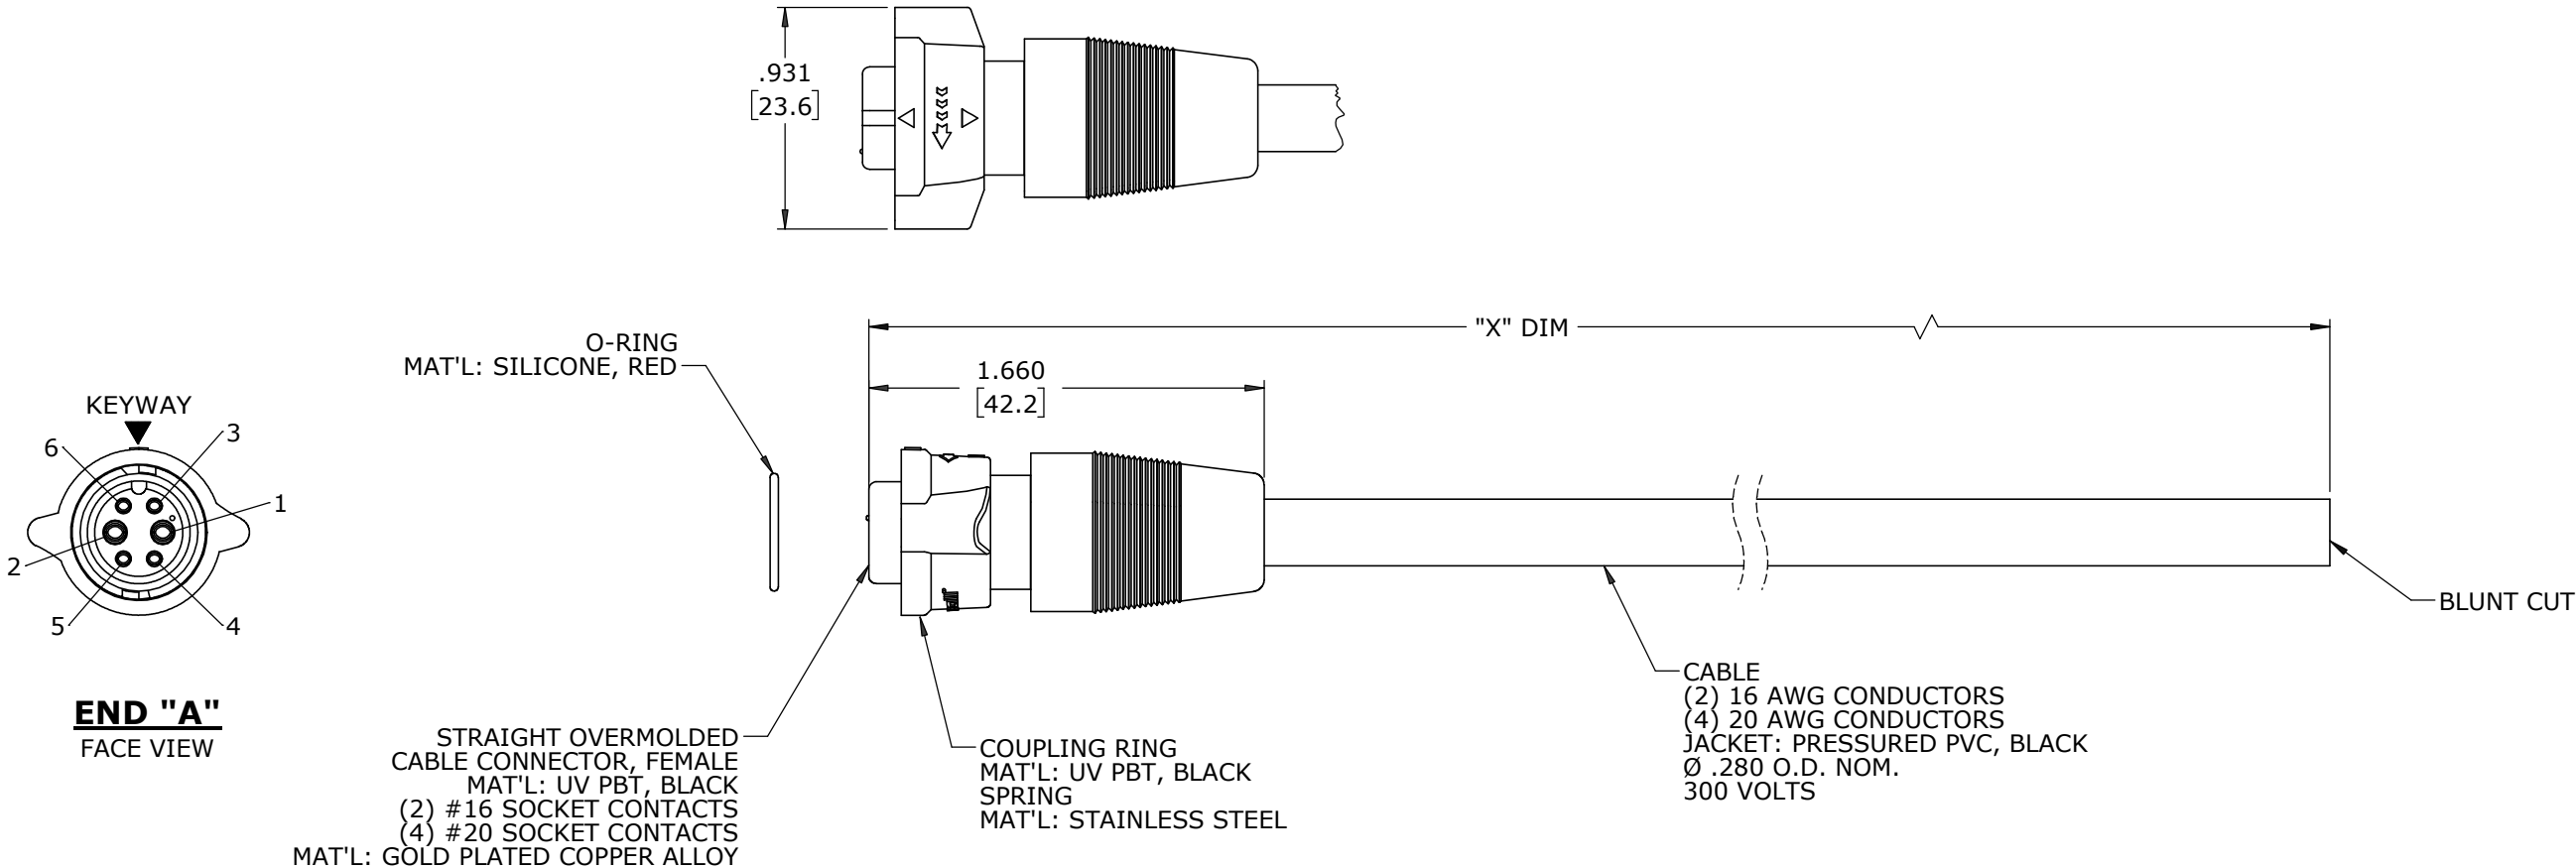

WIRE COLOR CODE

POS. 1	POS. 2	POS. 3	POS. 4	POS. 5	POS. 6
BLK	WHT	RED	BLU	GRN	YEL
16 AWG	16 AWG	20 AWG	20 AWG	20 AWG	20 AWG

DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS UNLESS INDICATED

CUSTOMER APPROVAL

THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT /INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.

APPROVED BY: _____

DATE: _____

RoHS COMPLIANT

A	MA	08-17-21	DRAWING CREATED PER DOR 21-109361DS-1		
REV.	INIT.	DATE	DESCRIPTION		
	MA	08-17-21	ORIG. DRAWN BY: MA	DATE: 08-17-21	 601 E. WILDWOOD VILLA PARK, IL 60181
			CHECKED BY:		
			APPROVED BY:		
ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF "CONXALL CORPORATION". UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED.			SCALE: NTS	SIZE: B	SHEET: 1 OF 1
ALL UNITS ARE IN FEET, INCHES, FRACTION OF INCHES AND DECIMALS.			FILE: CA6C806SPXXX90	DIRECTORY: SLW	PART NUMBER: CA6C806SPXXX90
= CRITICAL CHARACTERISTIC FLAG PER SPEC. XXXX			TITLE: CABLE ASSEMBLY 2#16/4#20 SKT CONTACTS INSTA-CLICK™ MINI-CON-X MIX SIG BULLET STANDARD PRODUCT		
			CUSTOMER: STANDARD PRODUCT		
			REV A		