

P | Cabling

Data sheet

**M12 Sensor/actuator cable, A-coded, 5.0 m,
M12 jack straight - M12 jack straight,
unshielded, 8-pole, PUR**

Page 1/7

P/N

142MEA22050

EAN 4251394648286


2022/03/14

Version: E


Illustrations



Dimensional drawing

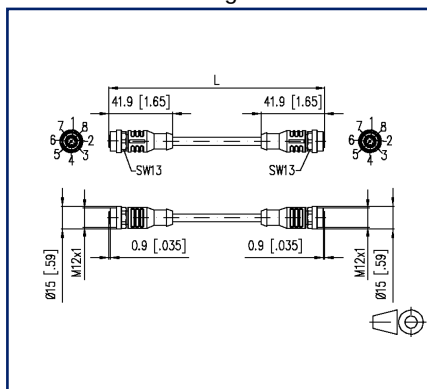

Wiring diagram

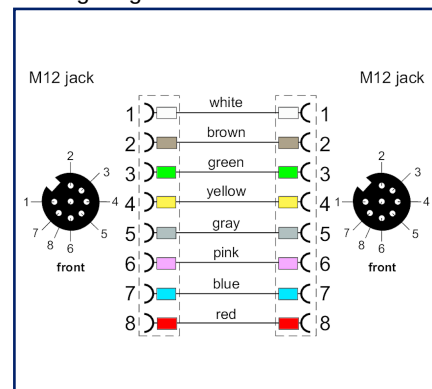

See enlarged drawings at the end of document

Product specification

Flexible, silicone- and halogen-free control cable with high mechanical strength. The cable is resistant to chemicals, hydrolysis and microbes. The drag-chain application is possible at a bending radius of minimum 10xd. Due to its weld-field immunity, the cable is very well suited for the flexible application in robotics, machine tools and metal-cutting production. The cables meet the UL and CSA (UL10493/20549; cULus) requirements. Special features: flame retardant, seawater resistant, recyclable, LABS free, RoHs compliant, acid and alkali resistant, ozone resistant, UV resistant, hydrolysis proof, drag chain resistant, torsion resistant, welding sparks resistant, halogen free, silicone free, oil resistant

- Standard variants: 1.0 m, 2.0 m, 5.0 m, 10.0 m.
- Other cable lengths on request.



P | Cabling

Data sheet

Page 2/7

**M12 Sensor/actuator cable, A-coded, 5.0 m,
M12 jack straight - M12 jack straight,
unshielded, 8-pole, PUR**

P/N

142MEA22050

EAN 4251394648286

2022/03/14

Version: E

Technical Data

General Data

Fields of application

Industrial Ethernet

Design

Sensor/actuator connection line M12, A-coded

Shielding

unshielded

Transmission technology

Copper

Color coding fiber/ wire(s)

white, brown, green, yellow, gray, pink, blue, red

Color

black

Dimensions

Dimension - Interface 1 (L x W x H)

41.9 mm x 15 mm x 15 mm

Dimension - Interface 1 (L x W x H)

1.65 in. x 0.591 in. x 0.591 in.

Dimension - Interface 2 (L x W x H)

41.9 mm x 15 mm x 15 mm

Dimension - Interface 2 (L x W x H)

1.65 in. x 0.591 in. x 0.591 in.

Cable length (m)

5 m

Cable length (ft)

16.4 ft

Labeling option

identification label carrier

Connections/interfaces

Connector technology interface 1 M12-jack

Connector technology interface 2 M12-jack

Coding interface 1 A-coded

Coding interface 2 A-coded

Number of positions/contacts interface 1 8

Number of positions/contacts interface 2 8

Termination data, stranded wire (min. - max.)

Conductor cross section, stranded wire AWG 24/32

Conductor cross section, stranded wire 0.25 mm²

Stranded wire structure 32x0.10mm



P | Cabling

Data sheet

Page 3/7

**M12 Sensor/actuator cable, A-coded, 5.0 m,
M12 jack straight - M12 jack straight,
unshielded, 8-pole, PUR**

P/N

142MEA22050

EAN 4251394648286

2022/03/14

Version: E

Technical Data

Connections/interfaces

Cable sheath diameter (min. - max.)

Cable sheath diameter 5.9 mm

Cable sheath diameter 0.232 in.

Electrical characteristics

Current carrying capacity 2 A at 40 °C

Rated voltage 30 V

Insulation resistance min. 100 MOhm

Mechanical data

Life - Number of mating cycles min. 100

Torsion +/-180°/m, >= 0.5 million cycles

Maximum operating bending radius 59 mm

Alternating bending radius 59 mm

acceleration 5 m/s²

Materials and material properties

Material - Conductor Cu (copper)

Material - Conductor Insulation polypropylene

Material - Cable jacket PUR

Material - Body interface 1 Plastics

Material - Body interface 2 Plastics

Material - Protective housing interface 1 FPM/FKM

Material - Protective housing interface 2 FPM/FKM

Material - Contact interface 1 CuSn (tin bronze)

Material - Contact interface 2 CuSn (tin bronze)

Material - Contact finish interface 1 Au (gold)

Material - Contact finish interface 2 Au (gold)

Material - Contact carriers interface 1 Plastics

Material - Contact carriers interface 2 Plastics

Material - Union nut interface 1 CuZnPb (brass)

Material - Union nut interface 2 CuZnPb (brass)

Material - Union nut finish interface 1 Ni (nickel)

Material - Union nut finish interface 2 Ni (nickel)



P | Cabling

Data sheet

Page 4/7

**M12 Sensor/actuator cable, A-coded, 5.0 m,
M12 jack straight - M12 jack straight,
unshielded, 8-pole, PUR**

P/N

142MEA22050

EAN 4251394648286

2022/03/14

Version: E

Technical Data

Materials and material properties	
Flame retardancy	yes
Halogen free	yes
Silicone free	no paint wetting interfering substances (LaBS) in the process chain
LaBS Note	subsequent contamination possible due to handling and possible storage in your company
Oil resistance	yes
UV-resistance	yes
drag chain suitable	yes
torsional	yes
RoHS	compliant
REACH	compliant
REACH - substance (SVHC)	Lead / 7439-92-1

Environmental conditions

Temperature (min. - max.)	
Temperature - Operating °C	-50 °C - 90 °C
Temperature - Operating °F	-58 °F - 194 °F
Temperature - Installation °C	-30 °C - 90 °C
Temperature - Installation °F	-22 °F - 194 °F
Temperature - drag chain °C	-25 °C - 60 °C
Temperature - drag chain °F	-13 °F - 140 °F
Particulate ingress interface 1	IP6X when plugged in
Liquid ingress/immersion interface 1	IPX5, IPX7, IPX8 when plugged in
Particulate ingress interface 2	IP6X when plugged in
Liquid ingress/immersion interface 2	IPX5, IPX7, IPX8 when plugged in
Pollution degree interface 1	3
Pollution degree interface 2	3



P | Cabling

Data sheet

Page 5/7

**M12 Sensor/actuator cable, A-coded, 5.0 m,
M12 jack straight - M12 jack straight,
unshielded, 8-pole, PUR**

P/N

142MEA22050

EAN 4251394648286

2022/03/14

Version: E

Technical Data

Approvals

CE	compliant
UL listed (file no.)	Approval pending

Standards/Regulations

Connectors for electronic equipment	
circular connector	DIN EN 61076-2-101

Classifications

ETIM 5.0	EC001855
ETIM 6.0	EC001855
ETIM 7.0	EC001855
ETIM 8.0	EC001855

Packing details

Type of packaging	1 pc(s) / plastic bag
-------------------	-----------------------

P | Cabling

Data sheet

**M12 Sensor/actuator cable, A-coded, 5.0 m,
M12 jack straight - M12 jack straight,
unshielded, 8-pole, PUR**

Page 6/7

P/N

142MEA22050


EAN 4251394648286

2022/03/14


Version: E

Illustrations

Dimensional drawing

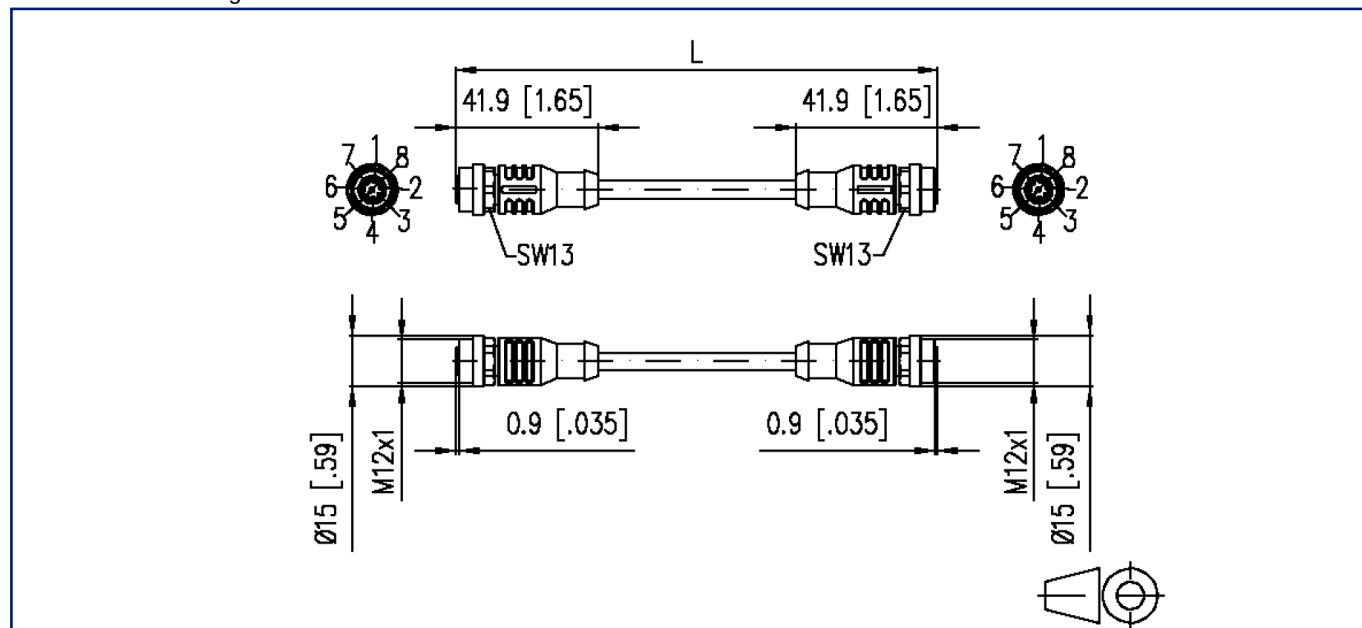

Wiring diagram

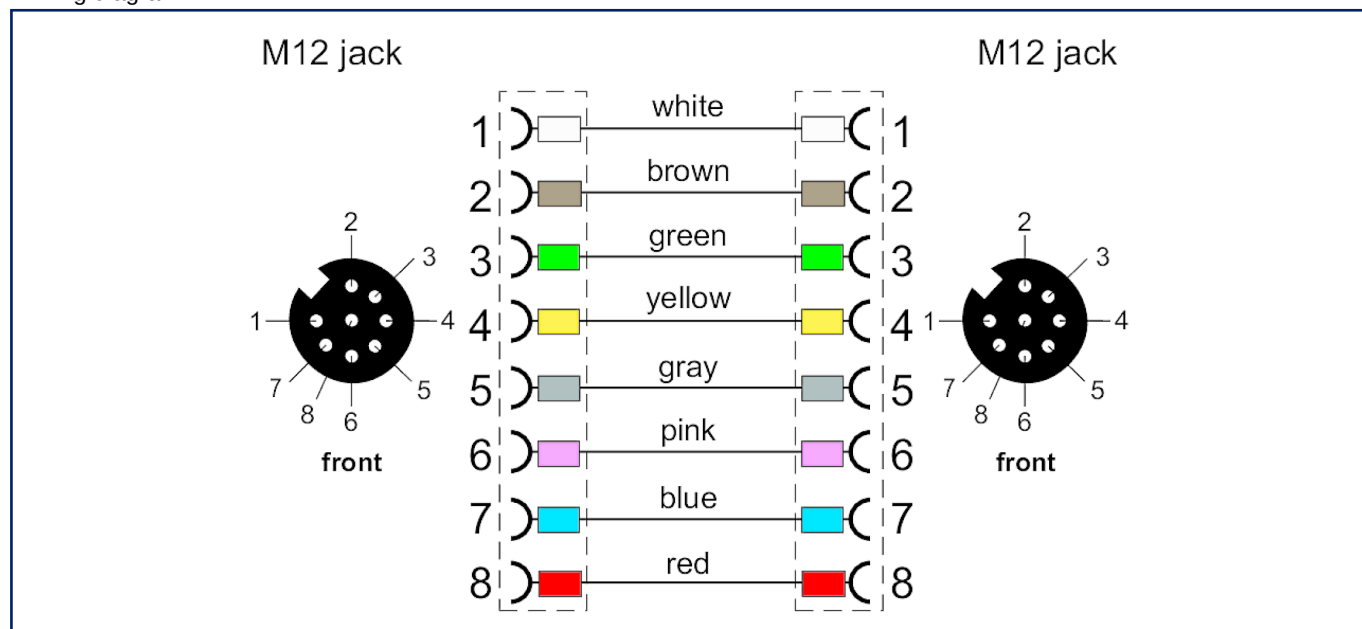

P | Cabling

Data sheet

Page 7/7

**M12 Sensor/actuator cable, A-coded, 5.0 m,
M12 jack straight - M12 jack straight,
unshielded, 8-pole, PUR**

P/N

142MEA22050

EAN 4251394648286

2022/03/14

Version: E

Illustrations

Principle diagram

