


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	51-00022.M	Connector, PPL7, 6C, 0° plug, 7x38 mm, chrome, solder, Ø2.2-5.2 mm wire, molding style	2	
2	30-00671	Wire, 5C BC, 28 AWG, UL20280, 300V, 80C, 4.5 mm braided shield, FT2, TPU	1	
3	24-00206	Overmold, PPL7 strian relief, 10x24 mm	2	TPU

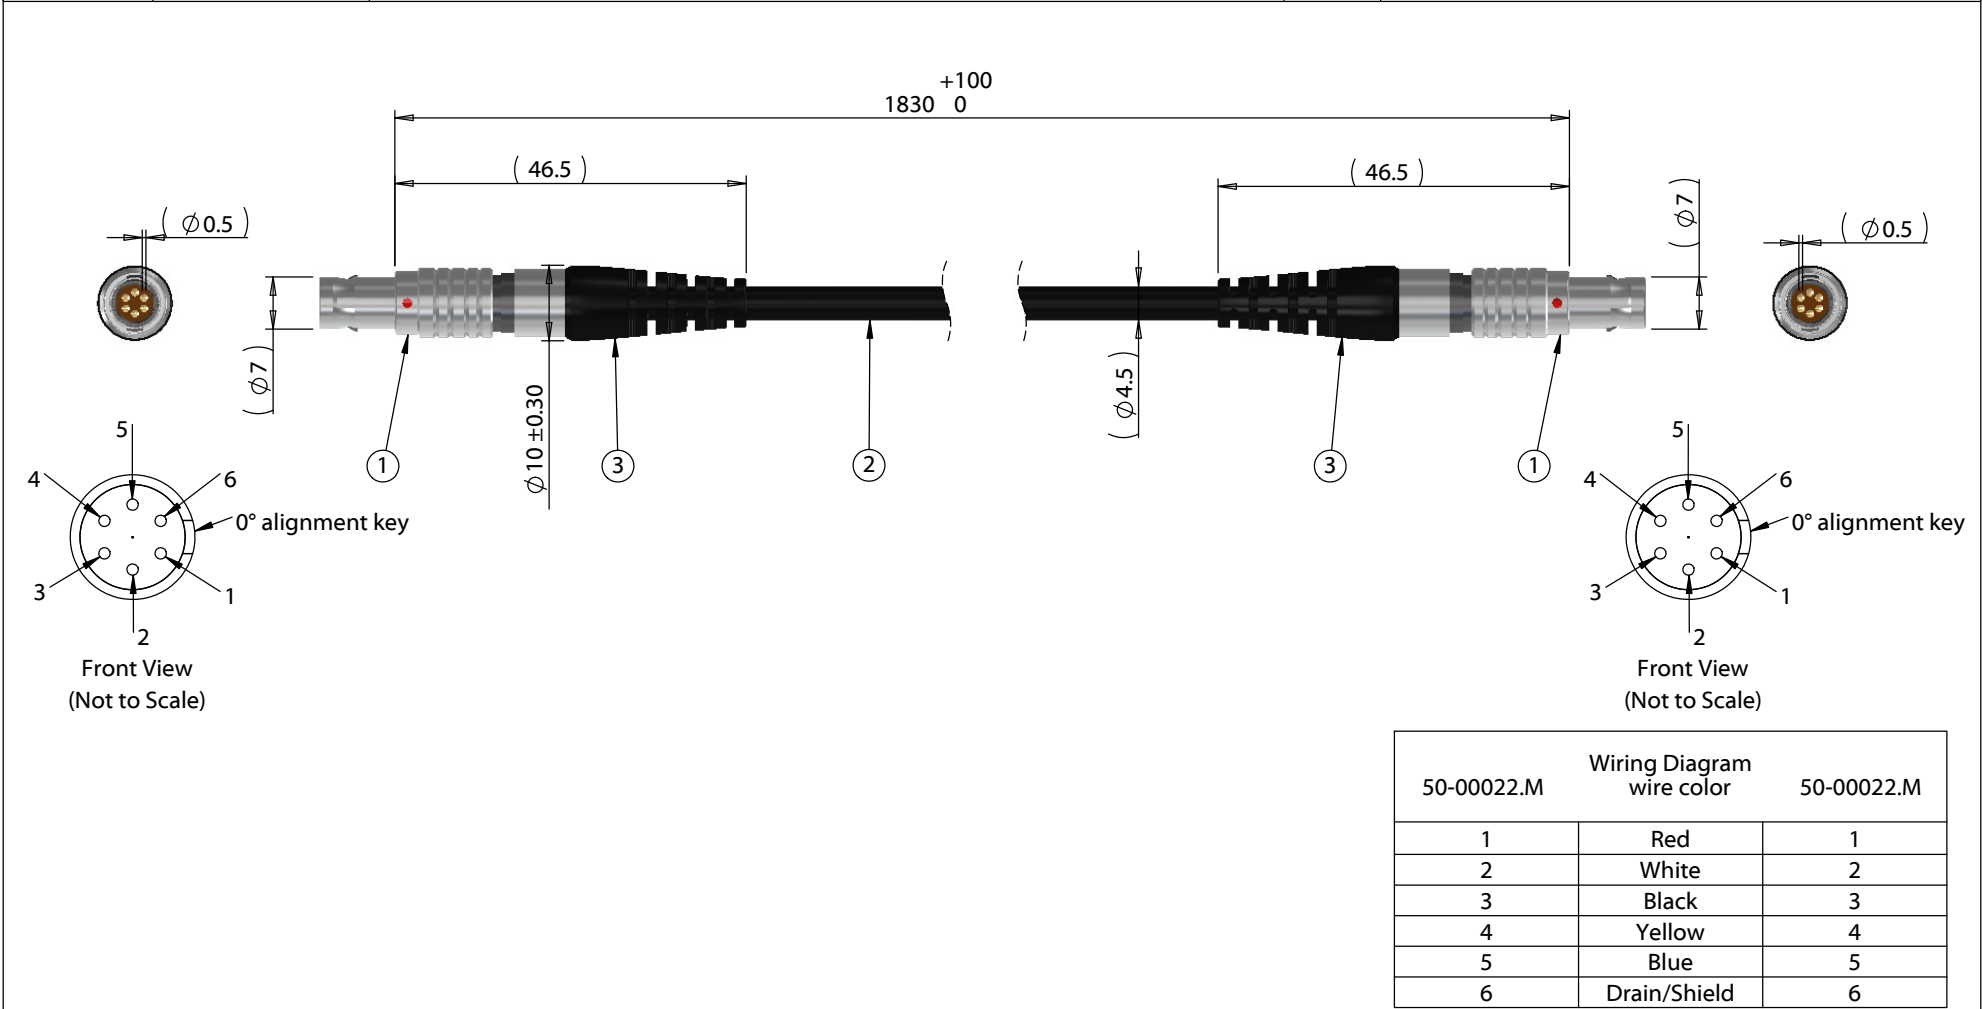

Revision:	Date:	Description:	Prepared:	Notes:	TENSILITY tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com		
A	3/27/2018	Initial release	AG				
			Verified:	RoHS compliant	Function test: no open, no short circuit, no intermittent		
			AW	Function test: no open, no short circuit, no intermittent			
			Dimensions are in millimeters.	Description:	Size:	Part number:	
			Tolerances:	Cable, 1830 mm, 6C PPL7 plug 51-00022.M to same, 28 AWG, UL20280 30-00671	A	10-02265	
			X: ± 0.5 mm		Scale:	1:1	Sheet 1 of 1
			X.X: ± 0.3 mm				
			X.XX: ± 0.05 mm				

To see a custom version of this cable assembly, call Tensility at 541-323-3228 or email engineering@tensility.com