


Number of contacts

64

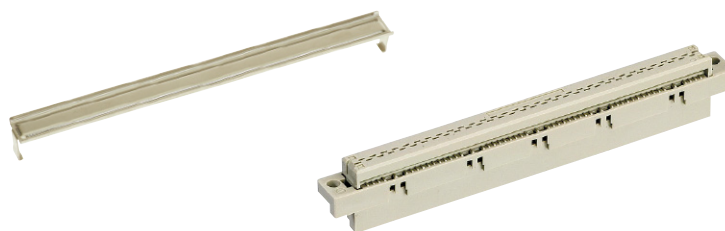

Female connectors

Identification	No. of contacts	Part number	Drawing	Dimensions in mm
Female connector for insulation displacement	64	Performance level 2 ¹⁾ 09 02 264 6828 Performance level 3 ¹⁾ 09 02 264 7828	Cable 1 to contact 1 b Contact arrangement View from termination side	
Strain relief (metal)		09 03 000 9940		
Panel cut out				
Flat cable AWG 28/7 grey 30.48 m grey 100.00 m colour coded 30.48 m twisted pair ²⁾ 30.48 m	64	09 18 064 7001 09 18 064 7004 09 18 064 7005 09 18 064 7006	²⁾ Termination area spacing = 508 mm Important: always store reels vertically Wire (tinned) Cu Gauge AWG 28/7 0.089 mm² Insulation material as per UL style PVC	
Round flat cable ³⁾ with screening 30.48 m screening 100.00 m without screening 30.48 m	64	09 18 064 7007 09 18 064 7010 09 18 064 7008	³⁾ Termination area spacing = 100 mm Edge mark on first conductor AWG 28/7 grey	
Bench press		09 99 000 0114		
Base plate		09 99 000 0150		
Cable cutter		09 99 000 0116		
Spare parts				
Blade		09 99 000 0179		
Cutting plate		09 99 000 0180		

Further components and accessories for insulation displacement see interface catalogue, chapter 32

¹⁾ acc. to IEC 60603-2