


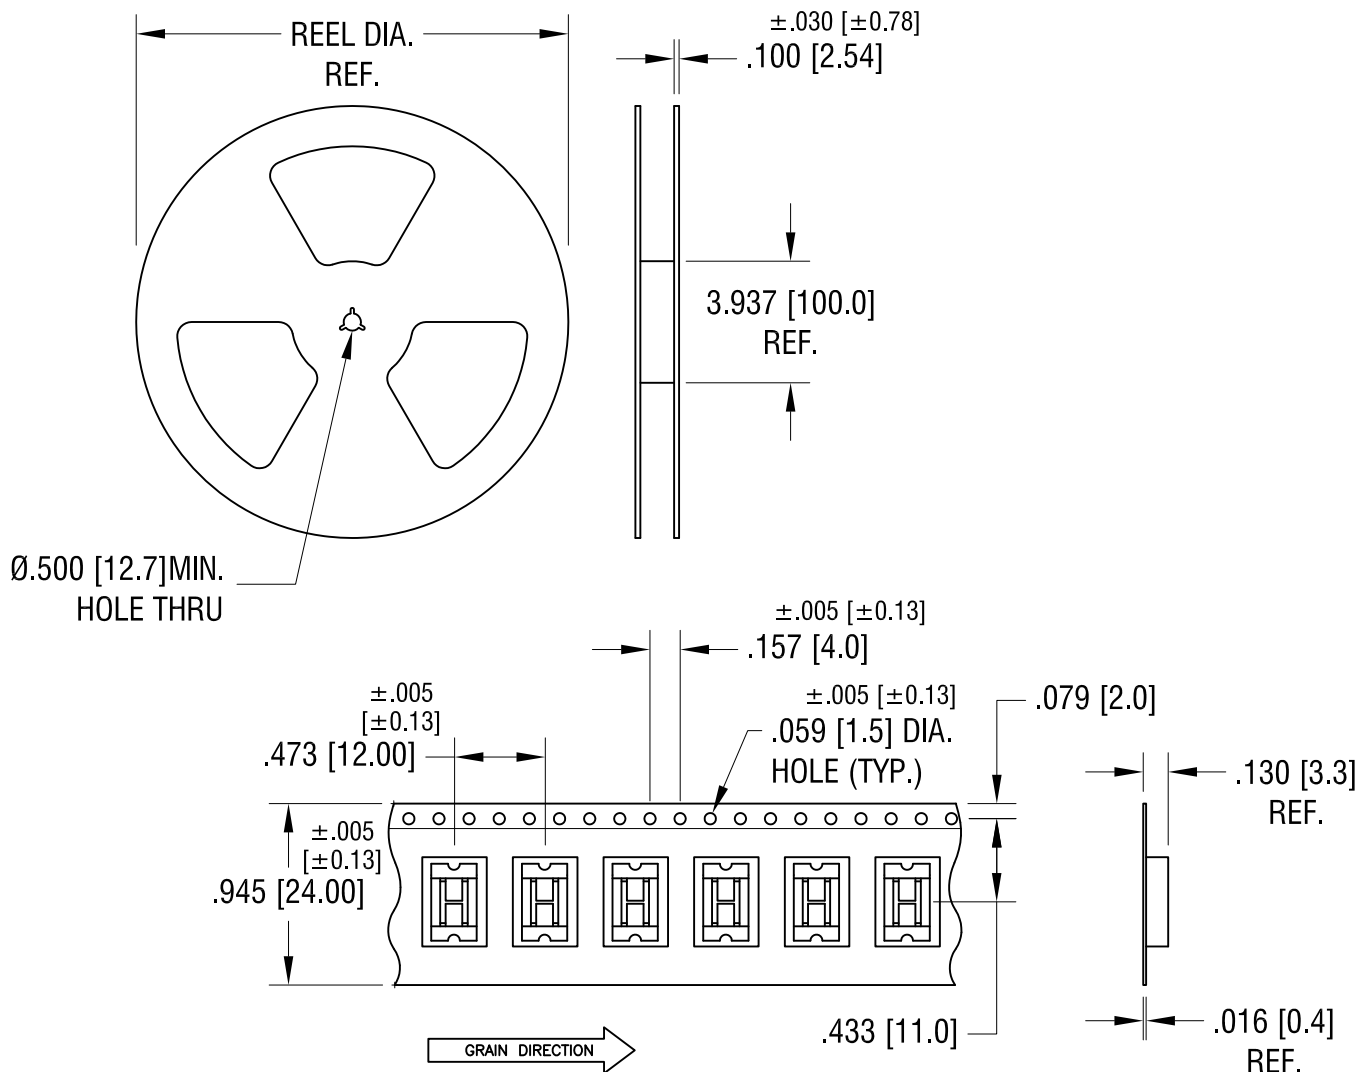

NOTES:

TAPE AND REEL SPECIFICATIONS:

1. TAPE:

MAT'L - ALL CONDUCTIVE POLYSTYRENE CARRIER
ANSI/EIA-481 STANDARD

2. REEL:

13.0 [330.2] DIA. 1500 PIECES OF
PART NO. 3583 PER REEL

3. KAPTON TAPE TO BE APPLIED TO TOP

SURFACE OF FUSE CLIP FOR VACUUM PICK AND PLACE

KEYSTONE ELECTRONICS CORP.

www.keyelco.com • NEW HYDE PARK, NY 11040 • Tel (516) 328-7500

PART NAME

SM MINI-AUTO BLADE CLIP ON TAPE

MATERIAL

AS NOTED

FINISH

AS NOTED

DRN BY

NT

DATE

2.13.18

APP'D

RH

SCALE

X

TOLERANCES

INCH

[MM]

DECIMAL

± 0.15 [± 0.38]

ANGULAR

± 1°

UNLESS OTHERWISE SPECIFIED

CODE

C

DWG NO.


3583KTR

DATE

DESCRIPTION

REV.

ACTUAL SIZE

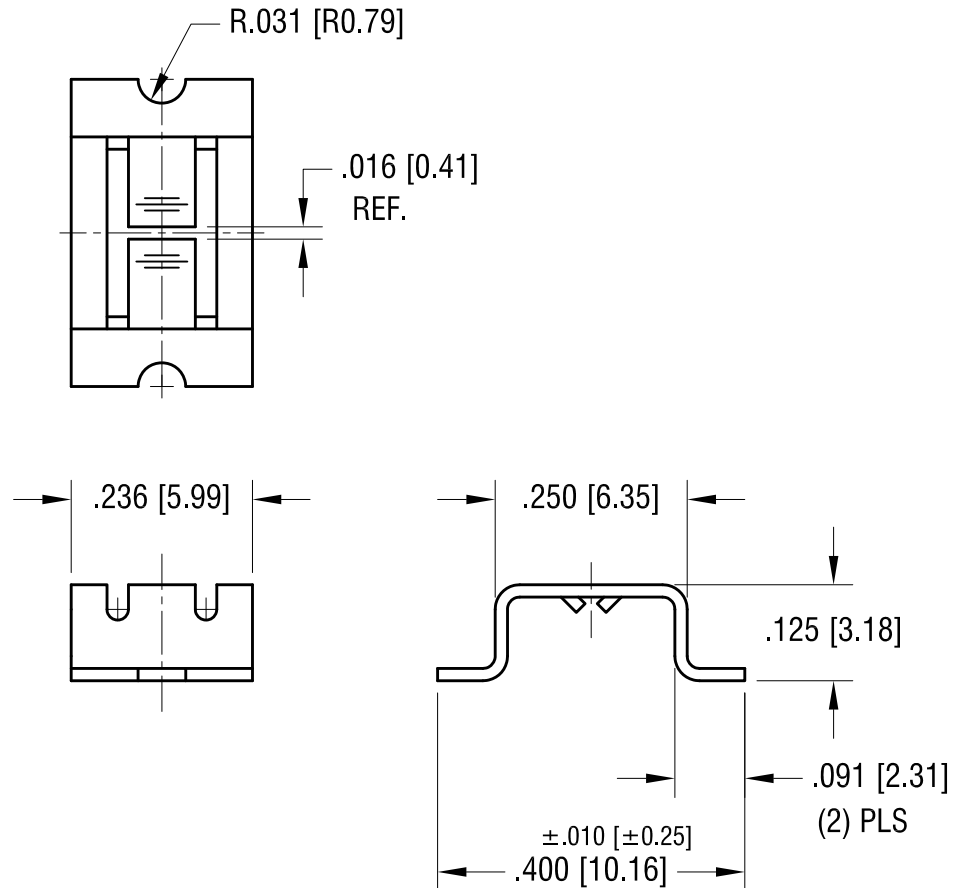

KEYSTONE ELECTRONICS CORP.

www.keyelco.com • ASTORIA, N.Y. 11105-2017 • Tel (718) 956-8900

PART NAME

SM MINI-AUTO BLADE FUSE CLIP

MATERIAL

.016 [0.40] TH'K BRASS

FINISH

MATTE TIN PLATE

DRN BY

NT

DATE

4.06.17

APP'D

LN

SCALE

4X

TOLERANCES

INCH

[MM]

DECIMAL

$\pm .005$ [± 0.13]

ANGULAR

$\pm 1^\circ$

UNLESS OTHERWISE SPECIFIED

CODE

C

DWG NO.

3583

DATE

DESCRIPTION

REV.