

MLVHV

Multilayer varistor ESD suppressor



Product features

- MLVHV0604V175: 0604 (1610 metric) package
- MLVHV0806VXXX: 0806 (2217 metric) package
- Bi-directional
- Meet 61000-4-5 standard
- Quick response time (<1ns)
- Meets moisture sensitivity level (MSL): 1

Applications

- Smart meters
- Vac driven LEDs (Acrich, driverless LEDs)
- GFCI and AFCIs
- Vac line protection
- Power supplies and converters
- Industrial equipment
- Commercial and home appliances

Agency information

- cURus recognized:
File E340782, Guide VZCA2 and VZCA8



Environmental compliance



Ordering part number

MLVHV 0604 V175

Family name _____
Package size _____
Working voltage (Vdc) _____



Powering Business Worldwide

Product specifications


Part number	Working voltage maximum		Varistor voltage @ 1 mA _{dc}	Leakage current V _v *80% (at initial state)	Clamping voltage 1 A 8/20 μs	Typical capacitance @ 1 kHz	Peak current 8/20 μs (1 time)	Peak current 8/20 μs (15 times)
	(Vac)	(Vdc)	(Vv)	(μA) maximum	(V) maximum	(pF) maximum	(A) maximum	(A) maximum
MLVHV0604								
MLVHV0604V175	180	225	270 ±10%	50	450	20	20	10
MLVHV0806								
MLVHV0806V150	150	200	240 ±10%	80	340	140	160	100
MLVHV0806V175	175	225	270 ±10%	80	390	100	100	50
MLVHV0806V250	250	320	390 ±10%	50	570	50	50	30
MLVHV0806V300	300	385	470 ±10%	50	740	15	10	10

V_v – Voltage across the device measured at 1 mA DC current.


Equivalent to V_b, "Breakdown Voltage".

Operating temperature range: -40 °C to +125 °C.

Dimensions—mm

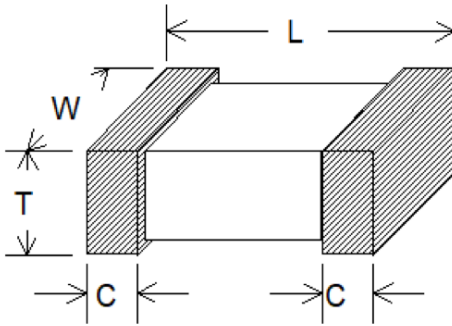

Pad layout

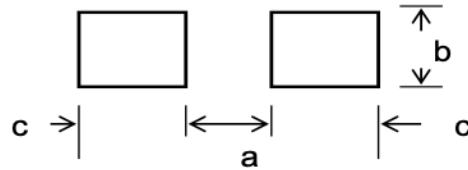


Dimension	Value
MLVHV0604	
L	1.60 ±0.15
W	1.05 ±0.10
T	1.15 maximum
C	0.25 ±0.10
MLVHV0806	
L	2.2 ±0.20
W	1.7 ±0.20
T	1.8 maximum
C	0.50 ±0.25

Dimension	Value
MLVHV0604	
a	0.7
b	1.07
c	0.92
MLVHV0806	
a	1.1
b	1.75
c	1.2

Print solder in a thickness of 150 to 200 μm


Terminal plating: Ni>4μm; Sn>4μm;
Part marking: (No marking)

Circuit diagram




Packaging information - mm

MLVHV0604: 3,000 parts on a 7" diameter tape and reel (EIA-481 compliant)
MLVHV0806: 2,000 parts on a 7" diameter tape and reel (EIA-481 compliant)

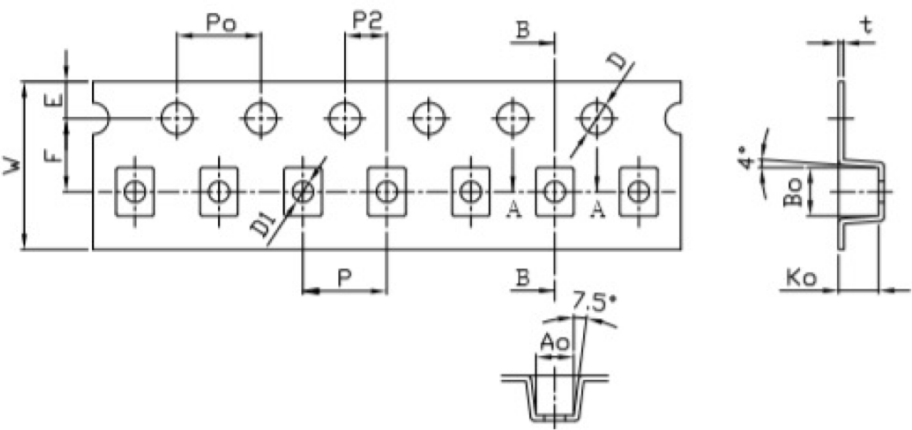

Dimension	Millimeter	Tolerance
W	8	±0.10
P	4	±0.10
E	1.75	±0.10
F	3.5	±0.05
P2	2	±0.05
D	1.5	+0.01/-0
D1	1	±0.10
P ₀	4	±0.10
10P ₀	40	±0.2
A ₀	1.8	±0.10
B ₀	2.3	±0.10
K ₀	1.9	±0.10
t	0.26	±0.05

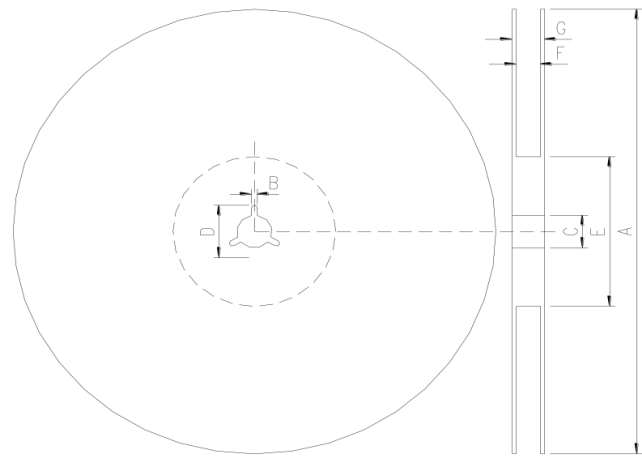

Dimension	Millimeter	Tolerance
A	178	±2.0
B	2	±0.5
C	13	±0.5
D	21	±0.8
E	62	±1.5
F	9	±0.5
G	13	±1.0

Solder reflow profile

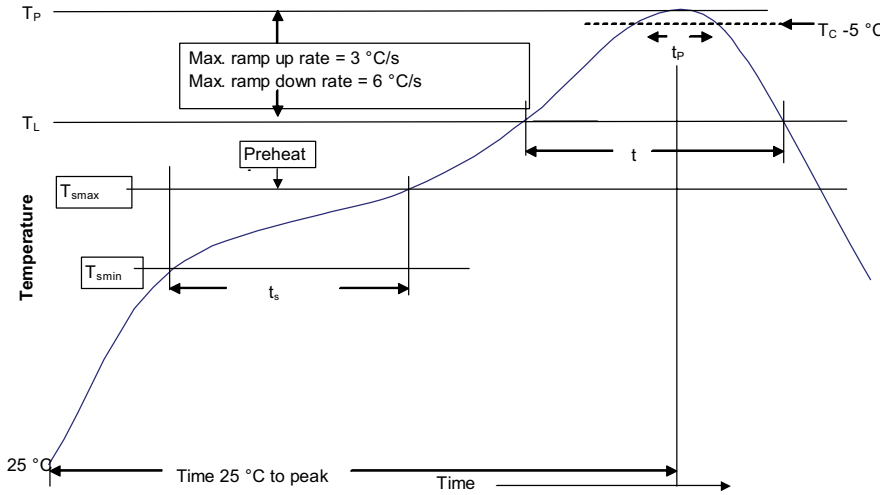


Table 1 - Standard SnPb solder (T_C)

Package thickness	Volume mm ³ <350	Volume mm ³ ≥350
<2.5 mm	235 °C	220 °C
≥2.5 mm	220 °C	220 °C

Table 2 - Lead (Pb) free solder (T_C)

Package thickness	Volume mm ³ <350	Volume mm ³ 350 - 2000	Volume mm ³ >2000
<1.6 mm	260 °C	260 °C	260 °C
1.6 – 2.5 mm	260 °C	250 °C	245 °C
>2.5 mm	250 °C	245 °C	245 °C

Reference J-STD-020

Profile feature	Standard SnPb solder	Lead (Pb) free solder
Preheat and soak		
• Temperature min. (T_{smin})	100 °C	150 °C
• Temperature max. (T_{smax})	150 °C	200 °C
• Time (T_{smin} to T_{smax}) (t_s)	60-120 seconds	60-120 seconds
Ramp up rate T_L to T_P	3 °C/ second max.	3 °C/ second max.
Liquidous temperature (T_L)	183 °C	217 °C
Time (t_L) maintained above T_L	60-150 seconds	60-150 seconds
Peak package body temperature (T_P)*	Table 1	Table 2
Time (t_P)* within 5 °C of the specified classification temperature (T_C)	20 seconds*	30 seconds*
Ramp-down rate (T_P to T_L)	6 °C/ second max.	6 °C/ second max.
Time 25 °C to peak temperature	6 minutes max.	8 minutes max.

* Tolerance for peak profile temperature (T_P) is defined as a supplier minimum and a user maximum.

Manual solder

+330 °C, 6 seconds maximum, 30 W maximum soldering iron, generally manual/hand soldering is not recommended

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

Eaton
Electronics Division
1000 Eaton Boulevard
Cleveland, OH 44122
United States
Eaton.com/electronics

© 2022 Eaton
All Rights Reserved
Printed in USA
Publication No. ELX1239 BU-ELX22101
October 2022

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

Follow us on social media to get the latest product and support information.

