



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
D		ECR-21-116716	19JUN222	TL	HL

D

C


B

A

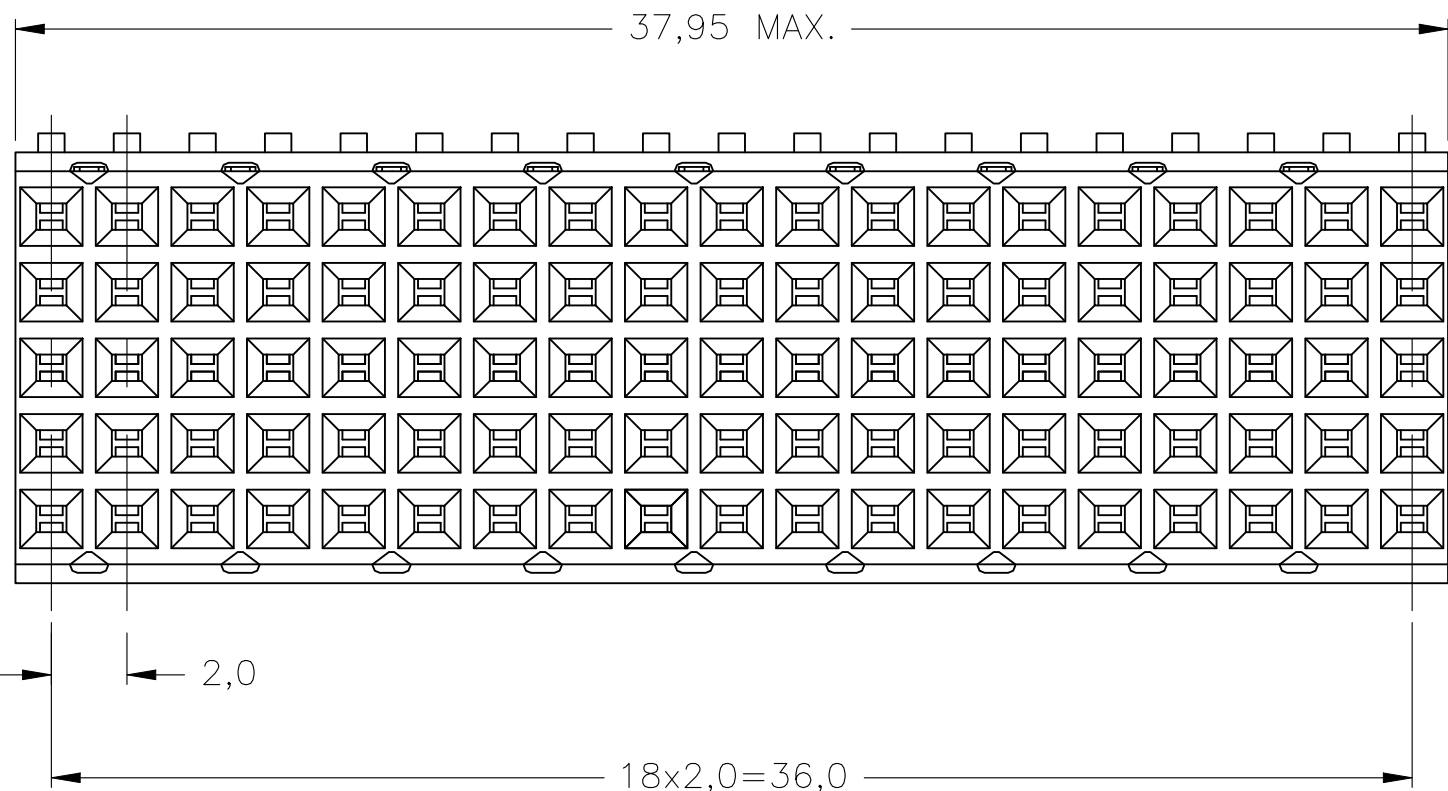
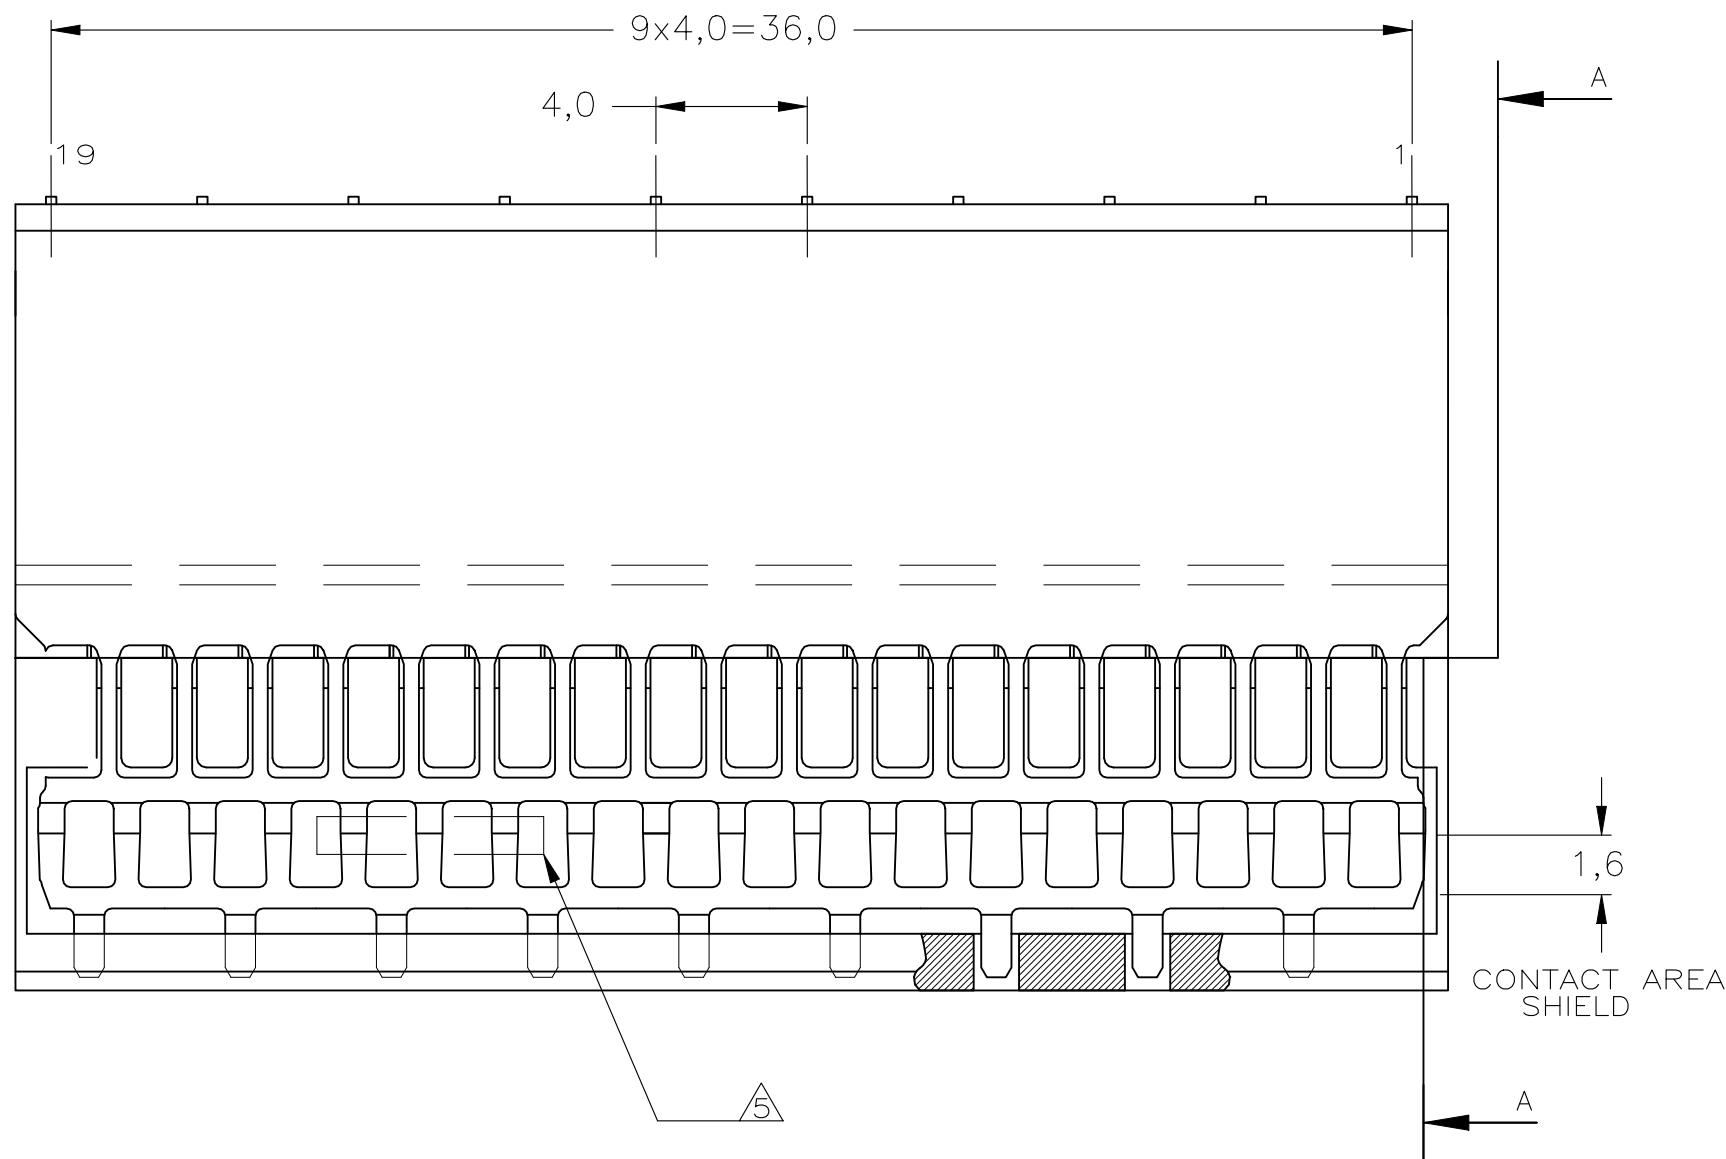


COMPONENT SIDE AS SHOWN
RECOMMENDED PCB-HOLE LAY-OUT
SCALE 2,5:1

P.C.B. HOLE DIM. COMPLIANT PIN
FOR DETAILS SEE
APPLICATION SPECIFICATION

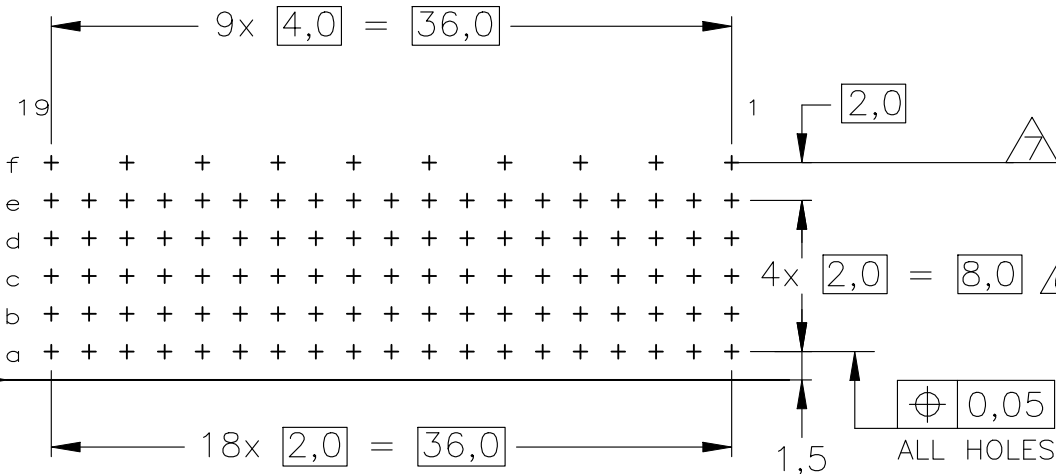

SECTION A-A

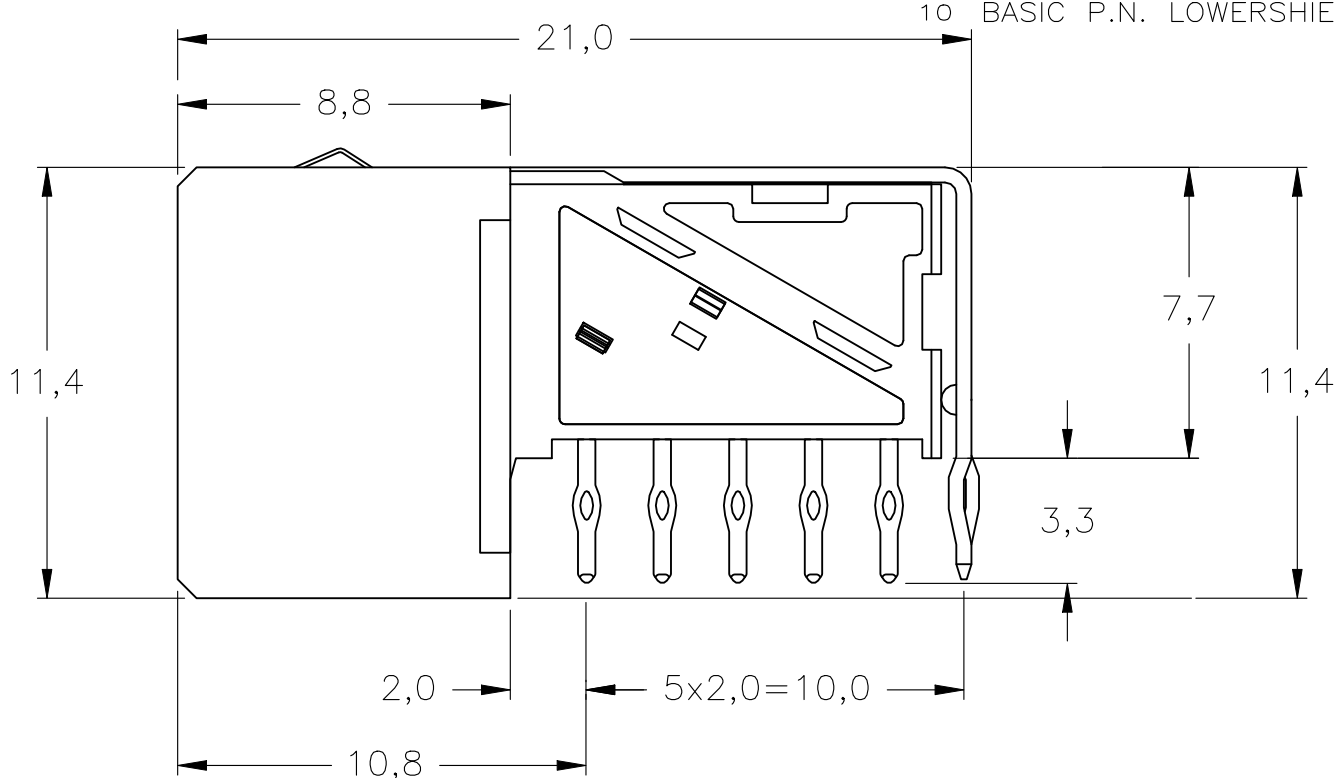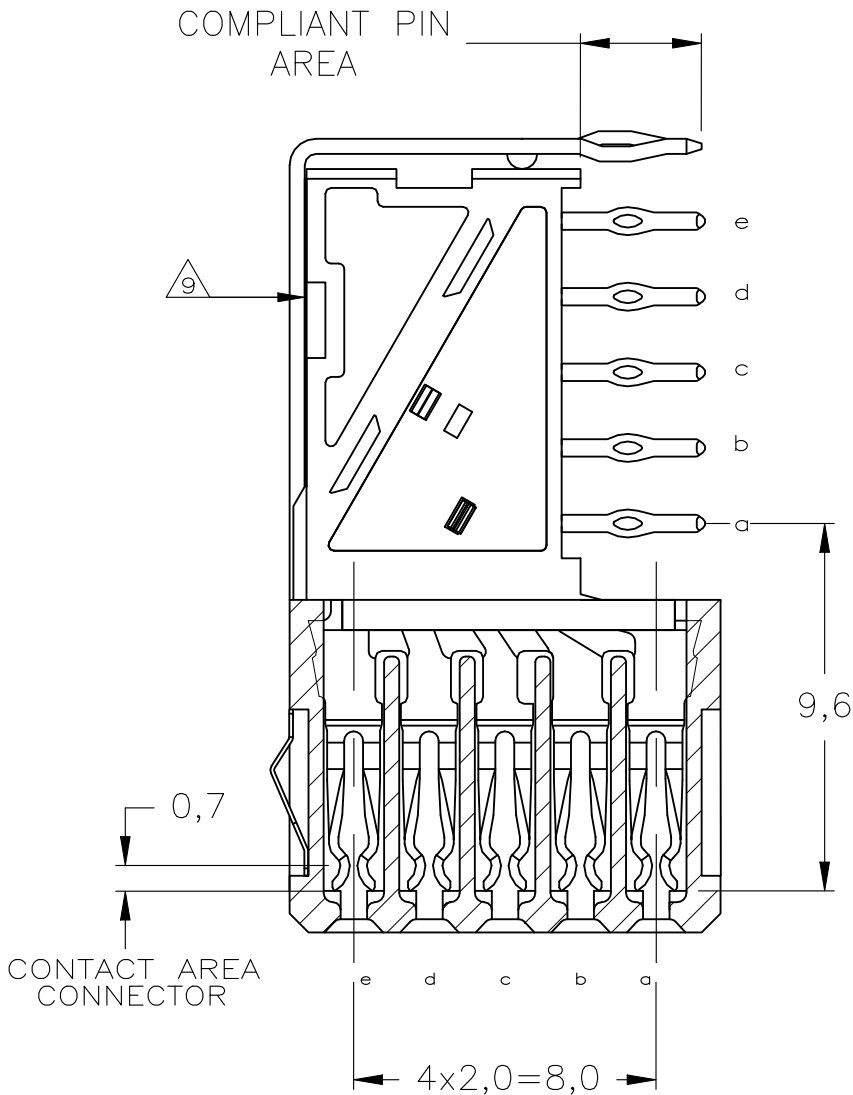

NOTES:

- CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 2.
- CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 1.
- GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT): 1,27µm NICKEL MIN. AND COMPLIANT PIN SECTION: 0,5µm TIN MIN. FOR PLATING OF MATING SURFACES SEE APPLICABLE SPECIFICATION REFERENCE FOR EACH DASH NUMBER.
- MATERIAL CONTACTS; PHOSPHORBRONZE
- MATERIAL HOUSING; GLASSFILLED POLYESTER (GRAY)
- ASSEMBLY PRINTED WITH P/N AND DATECODE THE MARKING CAN APPEAR ON THE FRONT SIDE OR BACK SIDE.
- HOLE PATTERN FOR FEMALE CONNECTOR TYPE B-19 COLUMNS 95 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID
- ROW "f" 10 PLATED THROUGH HOLES FOR UPERSHIELD
- CONNECTOR & SHIELD LUBRICATED WITH BELLCORE APPROVED LUBRICANT, TECHNICAL REFERENCE TR-NWT-001217 ISSUE 1, SEPT. 1992. CONNECTOR TESTED AND QUALIFIED AGAINST BELLCORE QUALITY LEVEL III, CENTRAL OFFICE APPLICATIONS
- SHIELD MOUNTED ON CONNECTOR WITH DOUBLE SIDED ADHESIVE TAPE OR ADHESIVE.
- BASIC P.N. LOWERSHIELD: 5352029

1 3 8	4	1857998-9
2 3	4	1857998-4
1 3	4	1857998-1
FINISH	MATERIAL	PARTNUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J.van Hoek 23AUG2007	TE Connectivity Ltd.		
DIMENSIONS: mm		CHK B.Mooij 23AUG2007			
TOLERANCES UNLESS OTHERWISE SPECIFIED: ±0.2		APVD J.Broeksteeg 23AUG2007	NAME		
6 PLC ±		PRODUCT SPEC 108-19082	Z-PACK 2mm HM		
1 PLC ±		APPLICATION SPEC 114-19029	TYPE B - 19 COLUMNS		
2 PLC ±		WEIGHT 0.000000	PRE-SHIELDED RECEPTACLE		
3 PLC ±		SIZE A2	CAGE CODE 00779		DRAWING NO C=1857998
4 PLC ±		CUSTOMER DRAWING	SCALE 5:1		SHEET 1 of 1
ANGLES ±			REV D		
FINISH					