



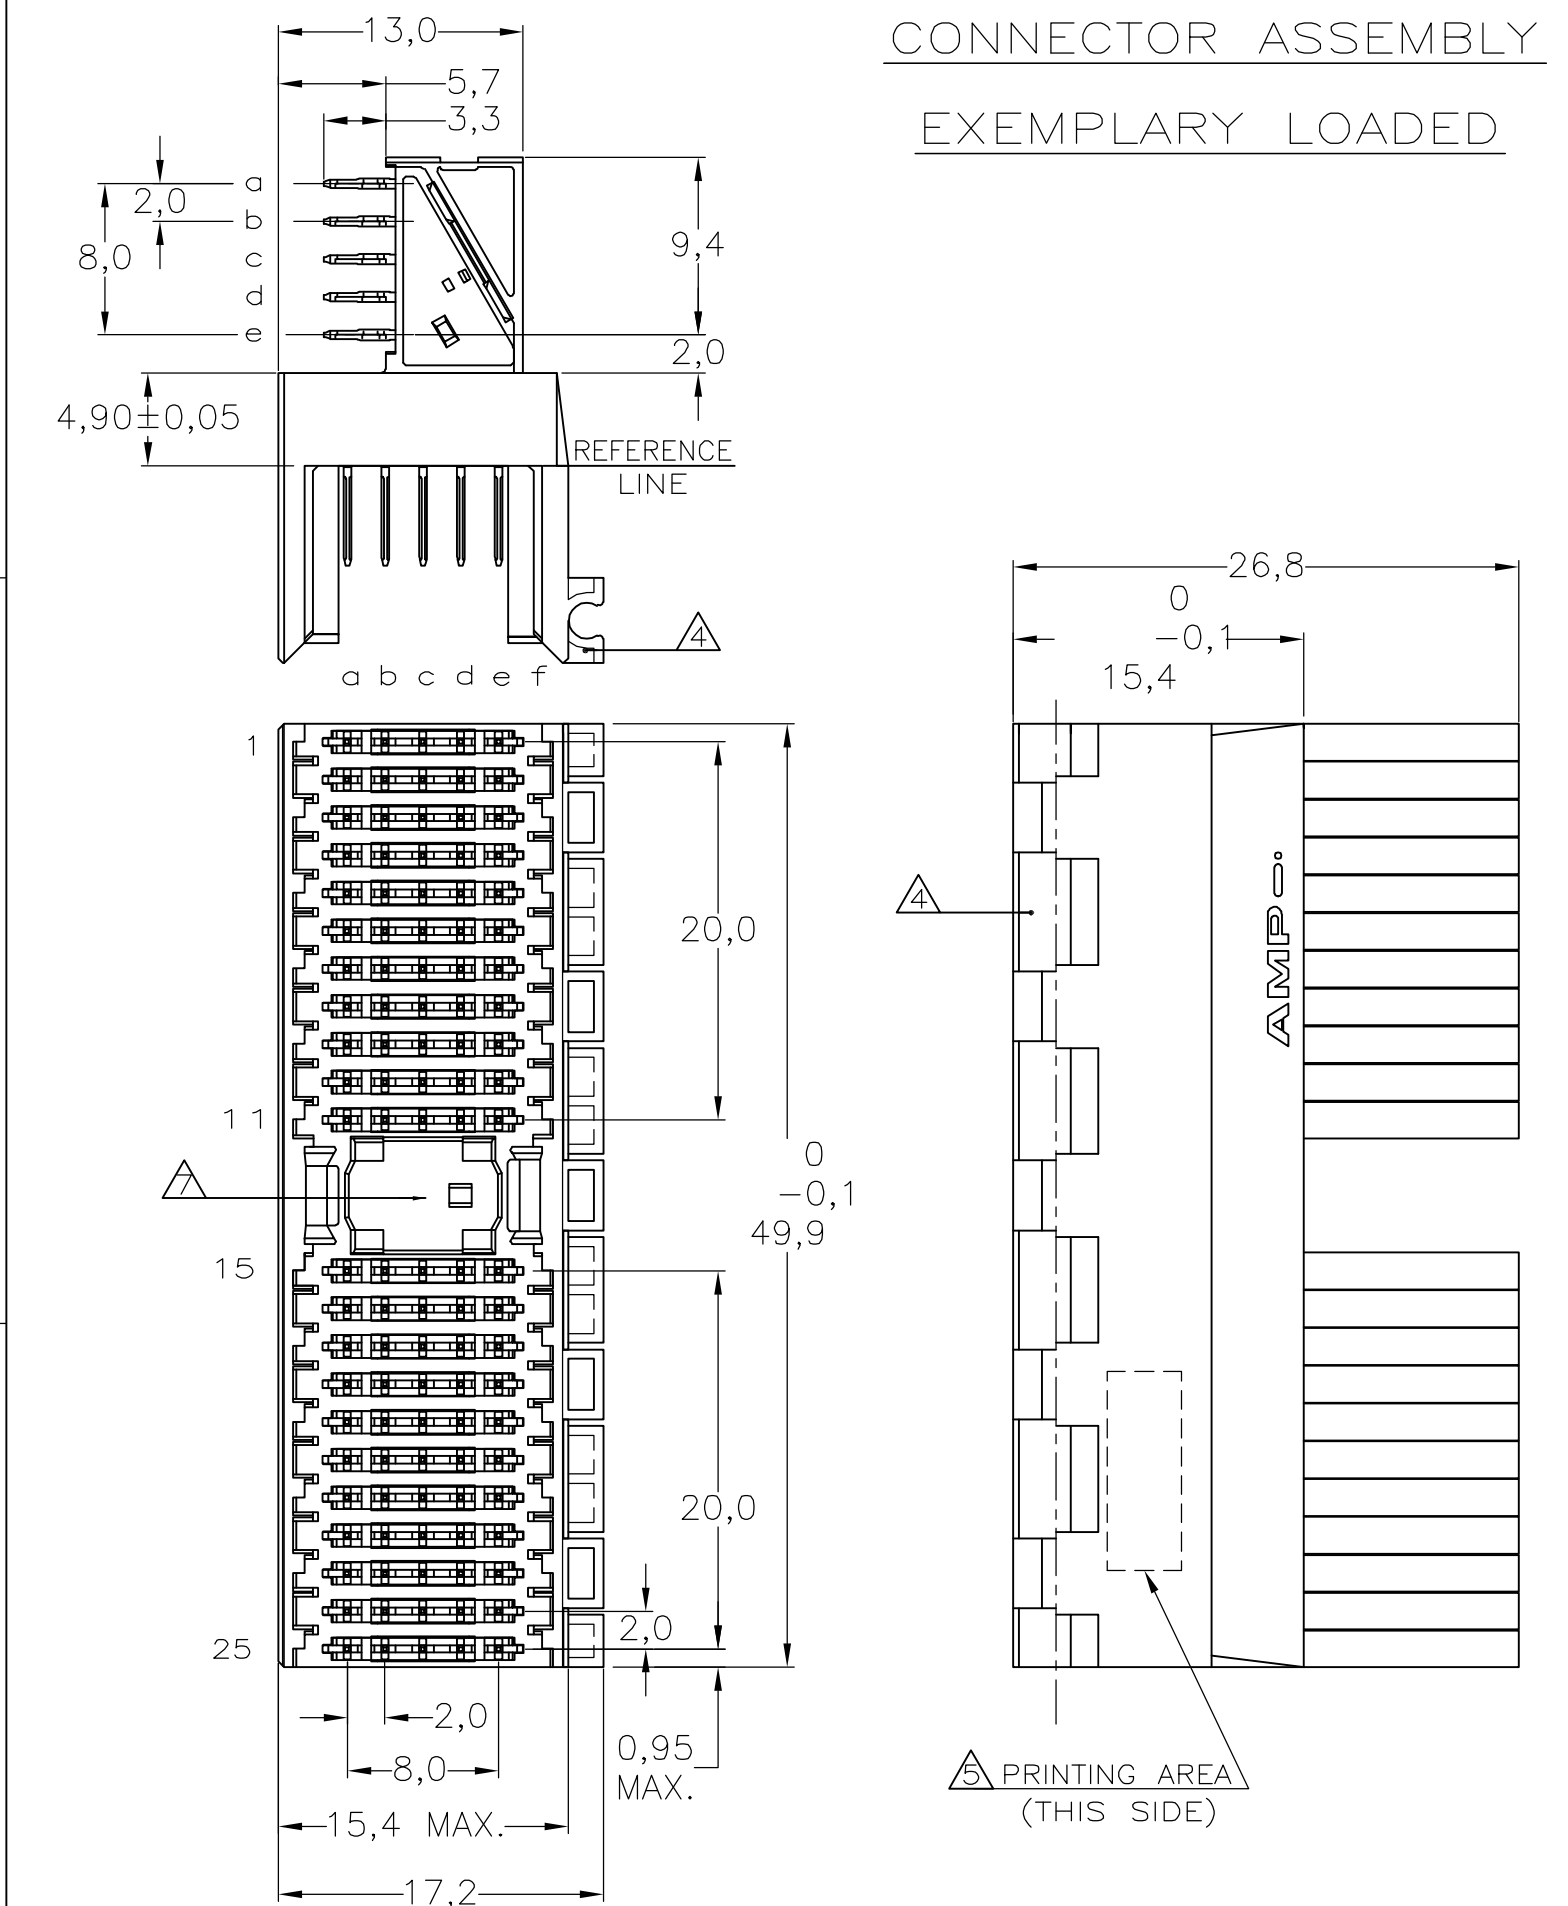


NOTES:

- △ MATERIAL HOUSING : GREY GLASSFILLED POLYESTER
UL-RATING V0
CONTACT : PHOSPHORBRONZE
- △ GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT):
1,27μm NICKEL MIN. AND ACTION PIN: 0,5μm TIN-LEAD MIN.
FOR PLATING OF MATING SURFACES SEE APPLICABLE SPECIFICATION
REFERENCE FOR EACH DASH NUMBER.
- △ 3 CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101
PERFORMANCE LEVEL 2.
- △ 4 CONNECTOR ASSEMBLY WITH LATCH HINGE FOR CABLE CONNECTOR.
- △ 5 CONNECTOR PRINTED WITH PARTNUMBER AND DATECODE
- △ 6 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID.
- △ AREA FOR KEYING PART (BASIC PART NUMBER 100525).

CONTACT DIMENSIONS

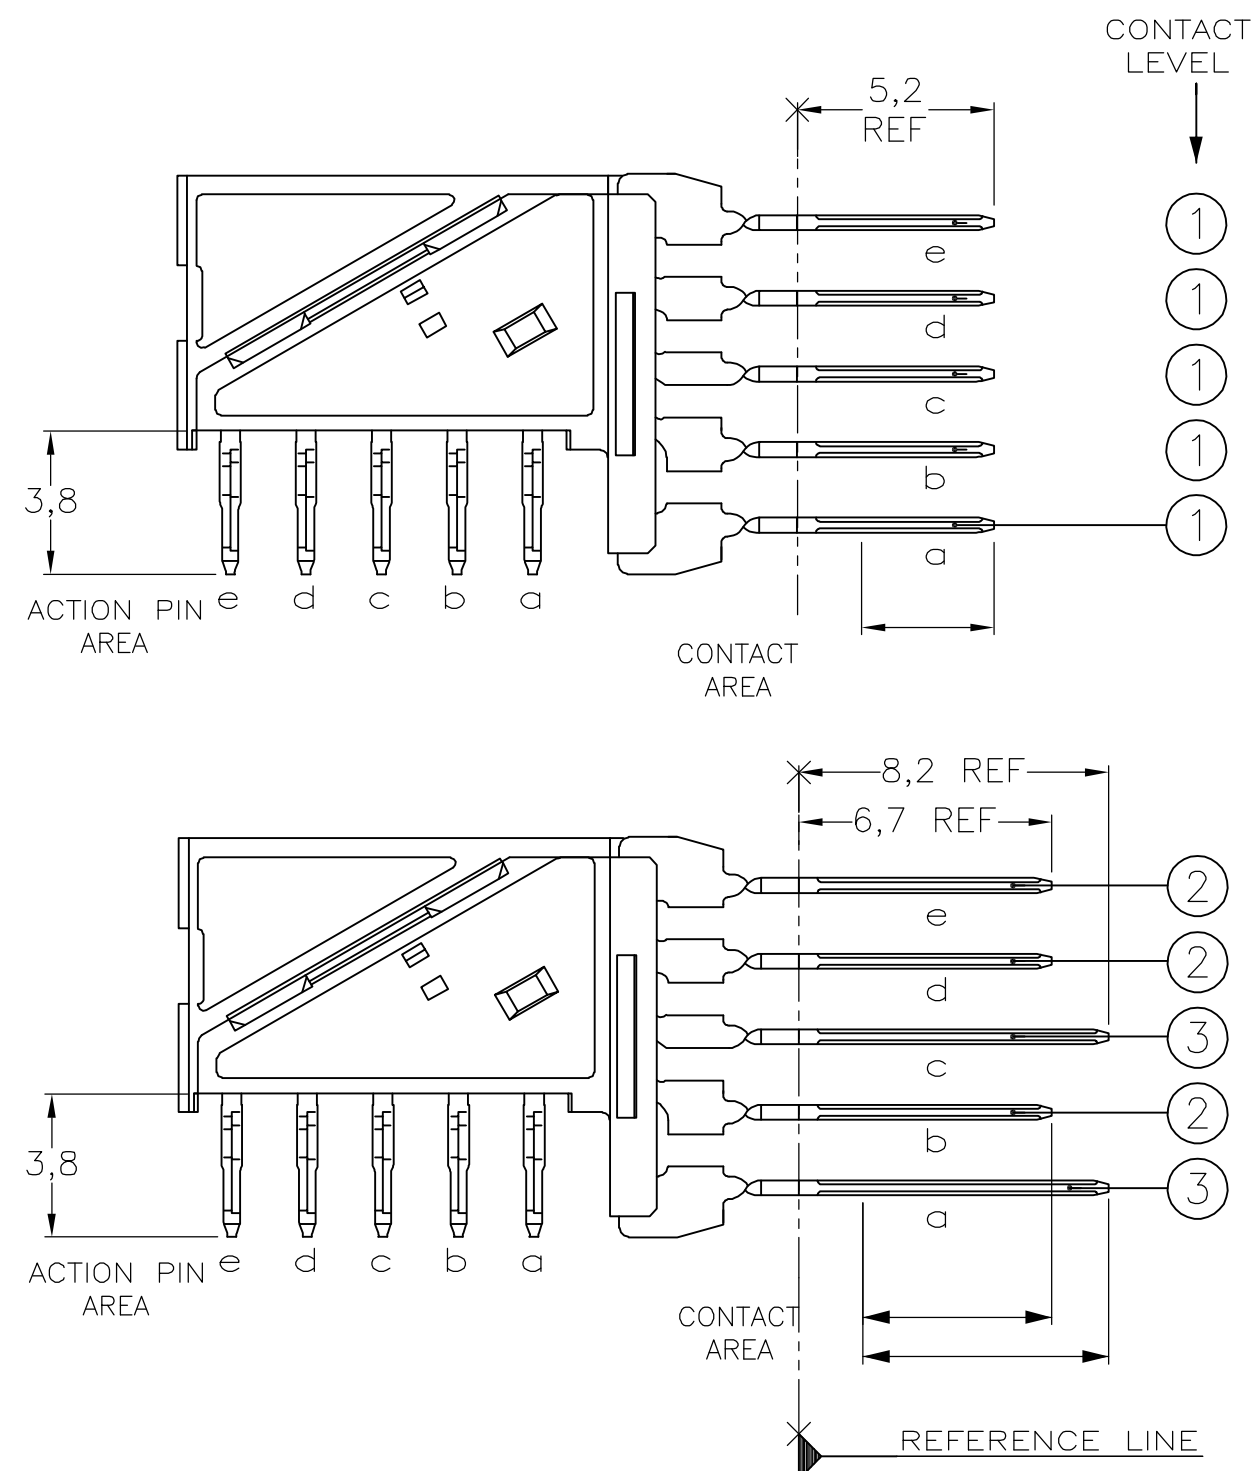


RECOMMENDED PCB-HOLE LAY-OUT
COMPONENT SIDE SHOWN

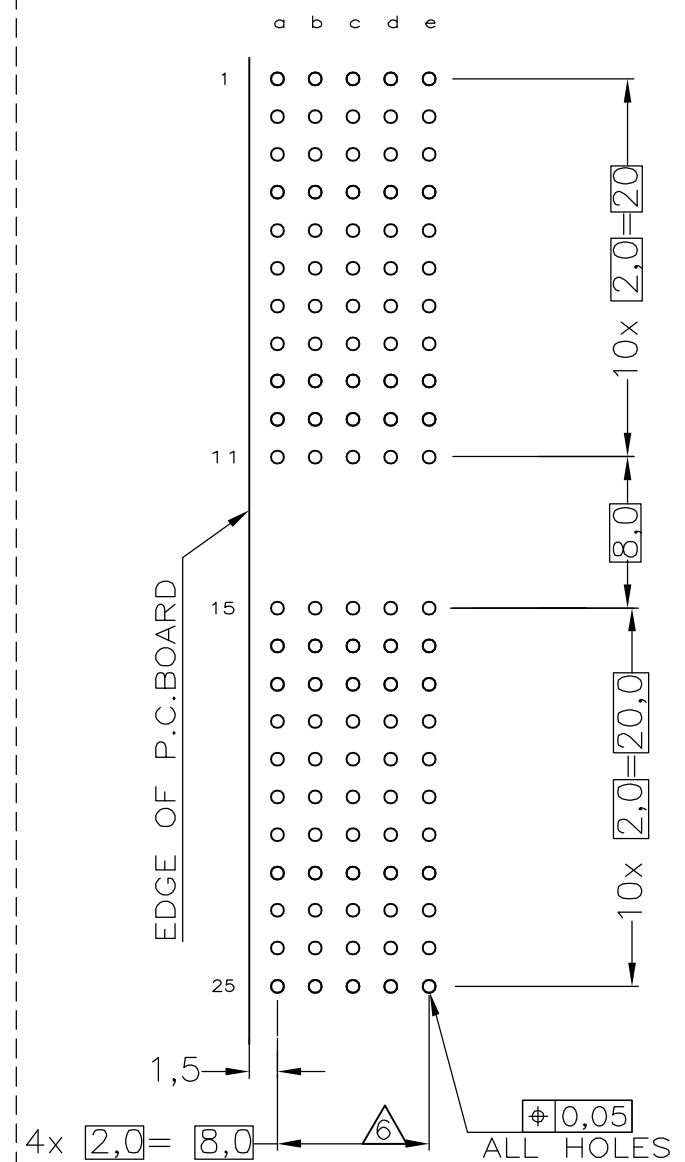

P.C.B. HOLE DIM. ACTION PIN
FOR DETAILS SEE APPLICATION SPECIFICATION

CONTACT LAYOUT

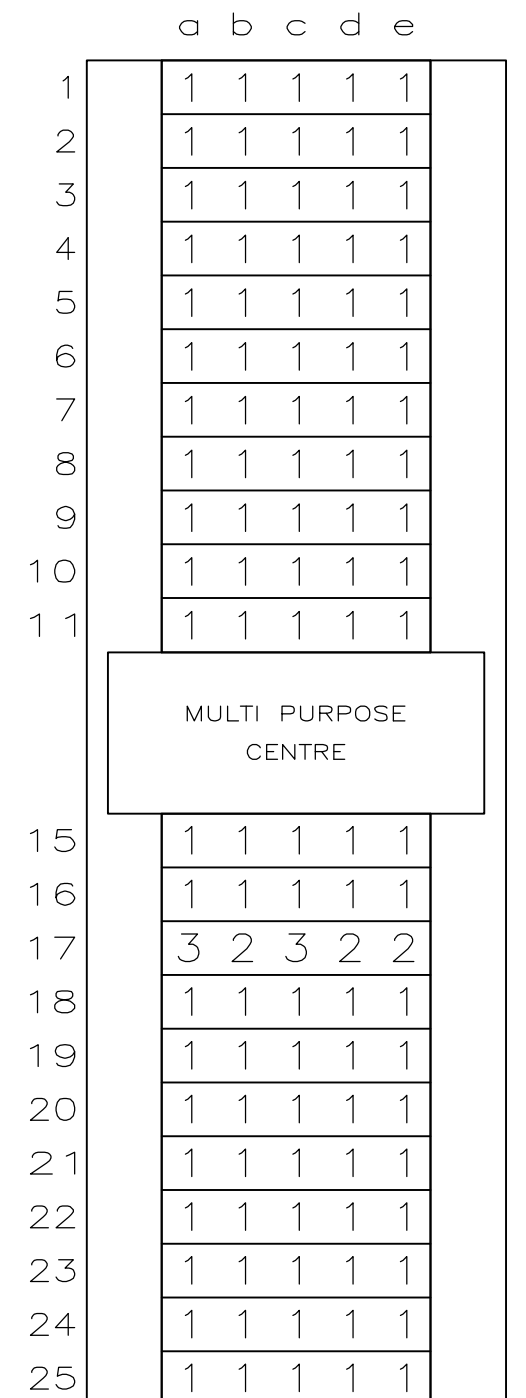

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
H	—		C	EHC0-0195-04	06-07-04	DvdB	BM
			D	EH10-0680-05	06-06-05	BSV	BM
			D1	ECR-06-002635	07-02-06	BSV	BM

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L.v.d.HEIJDEN 15DEC97		tyco Electronics Tyco Electronics Corporation s-HertogenBosch, Netherlands,					
		CHK D. TRUREN 15DEC97							
DIMENSIONS: MM		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		NAME Z-PACK 2MM HM TYPE A 110 POS. RIGHT ANGLE MALE CONNECTOR ASSEMBLY					
		APVD F.v.KONINGSBRUGGE							
		PRODUCT SPEC							
		APPLICATION SPEC							
		114-19029		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO		
MATERIAL		FINISH		WEIGHT		A2 00779 C-188395			
-		-		-		-			
CUSTOMER DRAWING				SCALE	NTS	SHEET	1 OF 1	REV	D1