
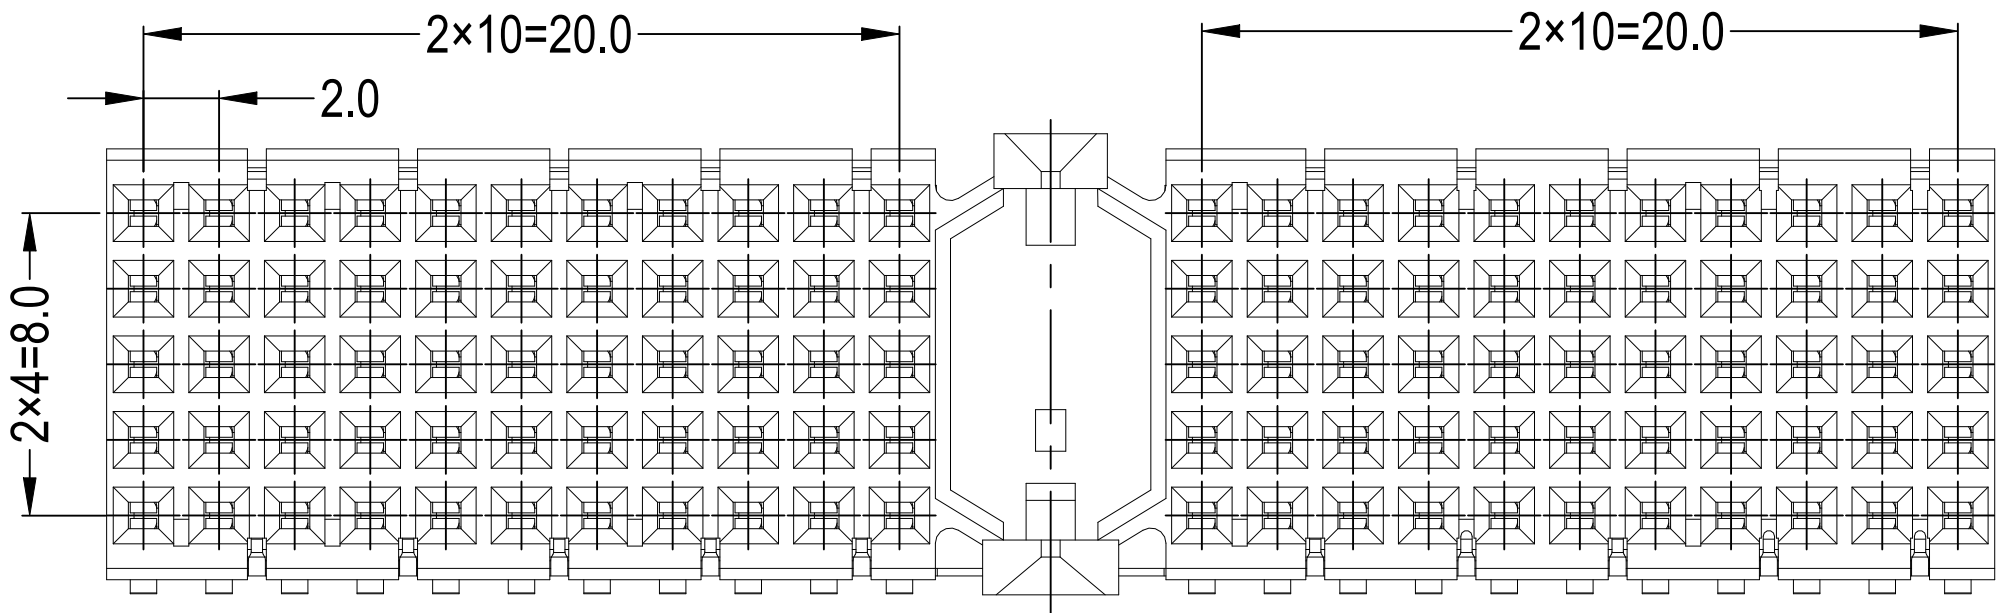
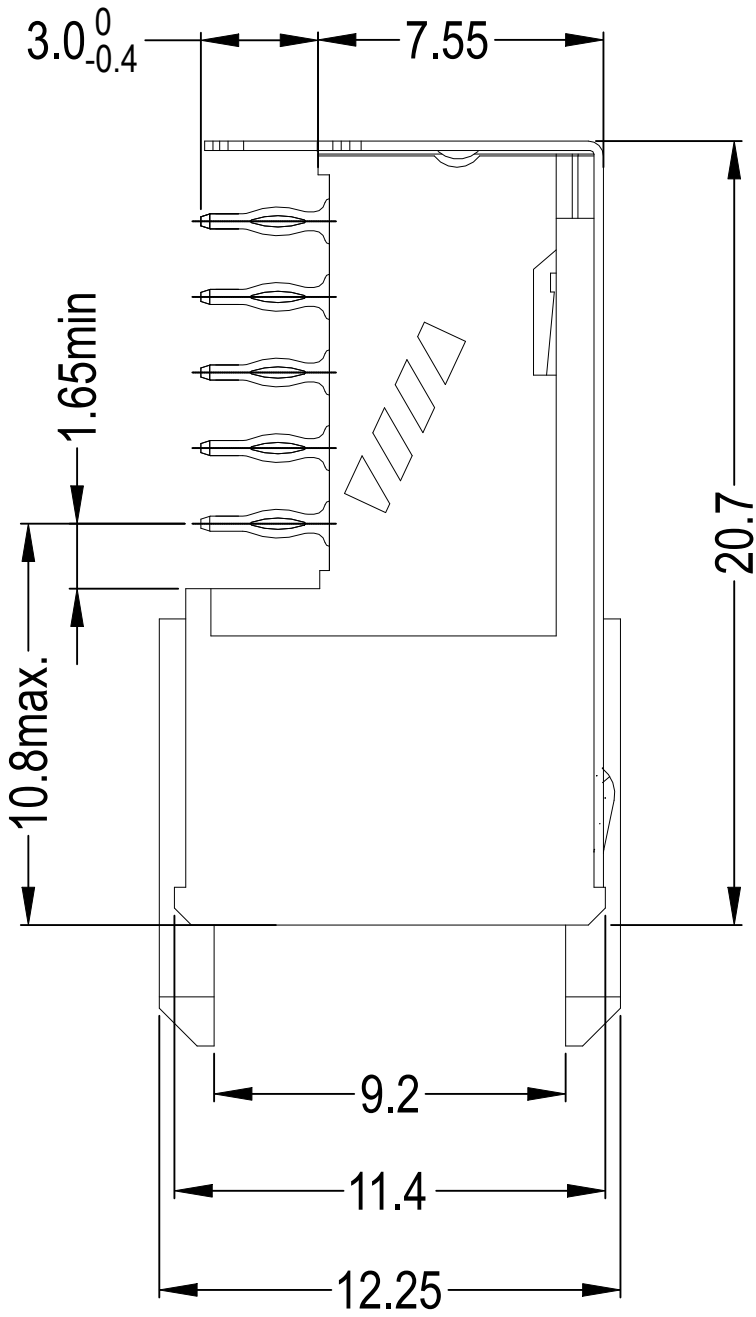


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
B		ECR-21-112460	2SEP2021	TL	HL


NOTES:

- ⚠
- MATERIAL:
CONTACTS & SHIELD: COPPER ALLOY
HOUSING: GLASSFILLED POLYESTER,COLOR NATURAL
- ⚠
- GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT):
1,27µm NICKEL MIN. AND EON PIN SECTION: 0.5µm TIN MIN.
FOR PLATING OF MATING SURFACES SEE APPLICABLE SPECIFICATION
REFERENCE FOR EACH DASH NUMBER.
- ⚠
- CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101
PERFORMANCE LEVEL 2.
- ⚠
- ASSEMBLY PRINTED WITH P/N AND DATECODE
- ⚠
- HOLE PATTERN FOR FEMALE CONNECTOR TYPE A
110 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID
- ⚠
- ROW "f" 13 PLATED THROUGH HOLES FOR UPPERSHIELD

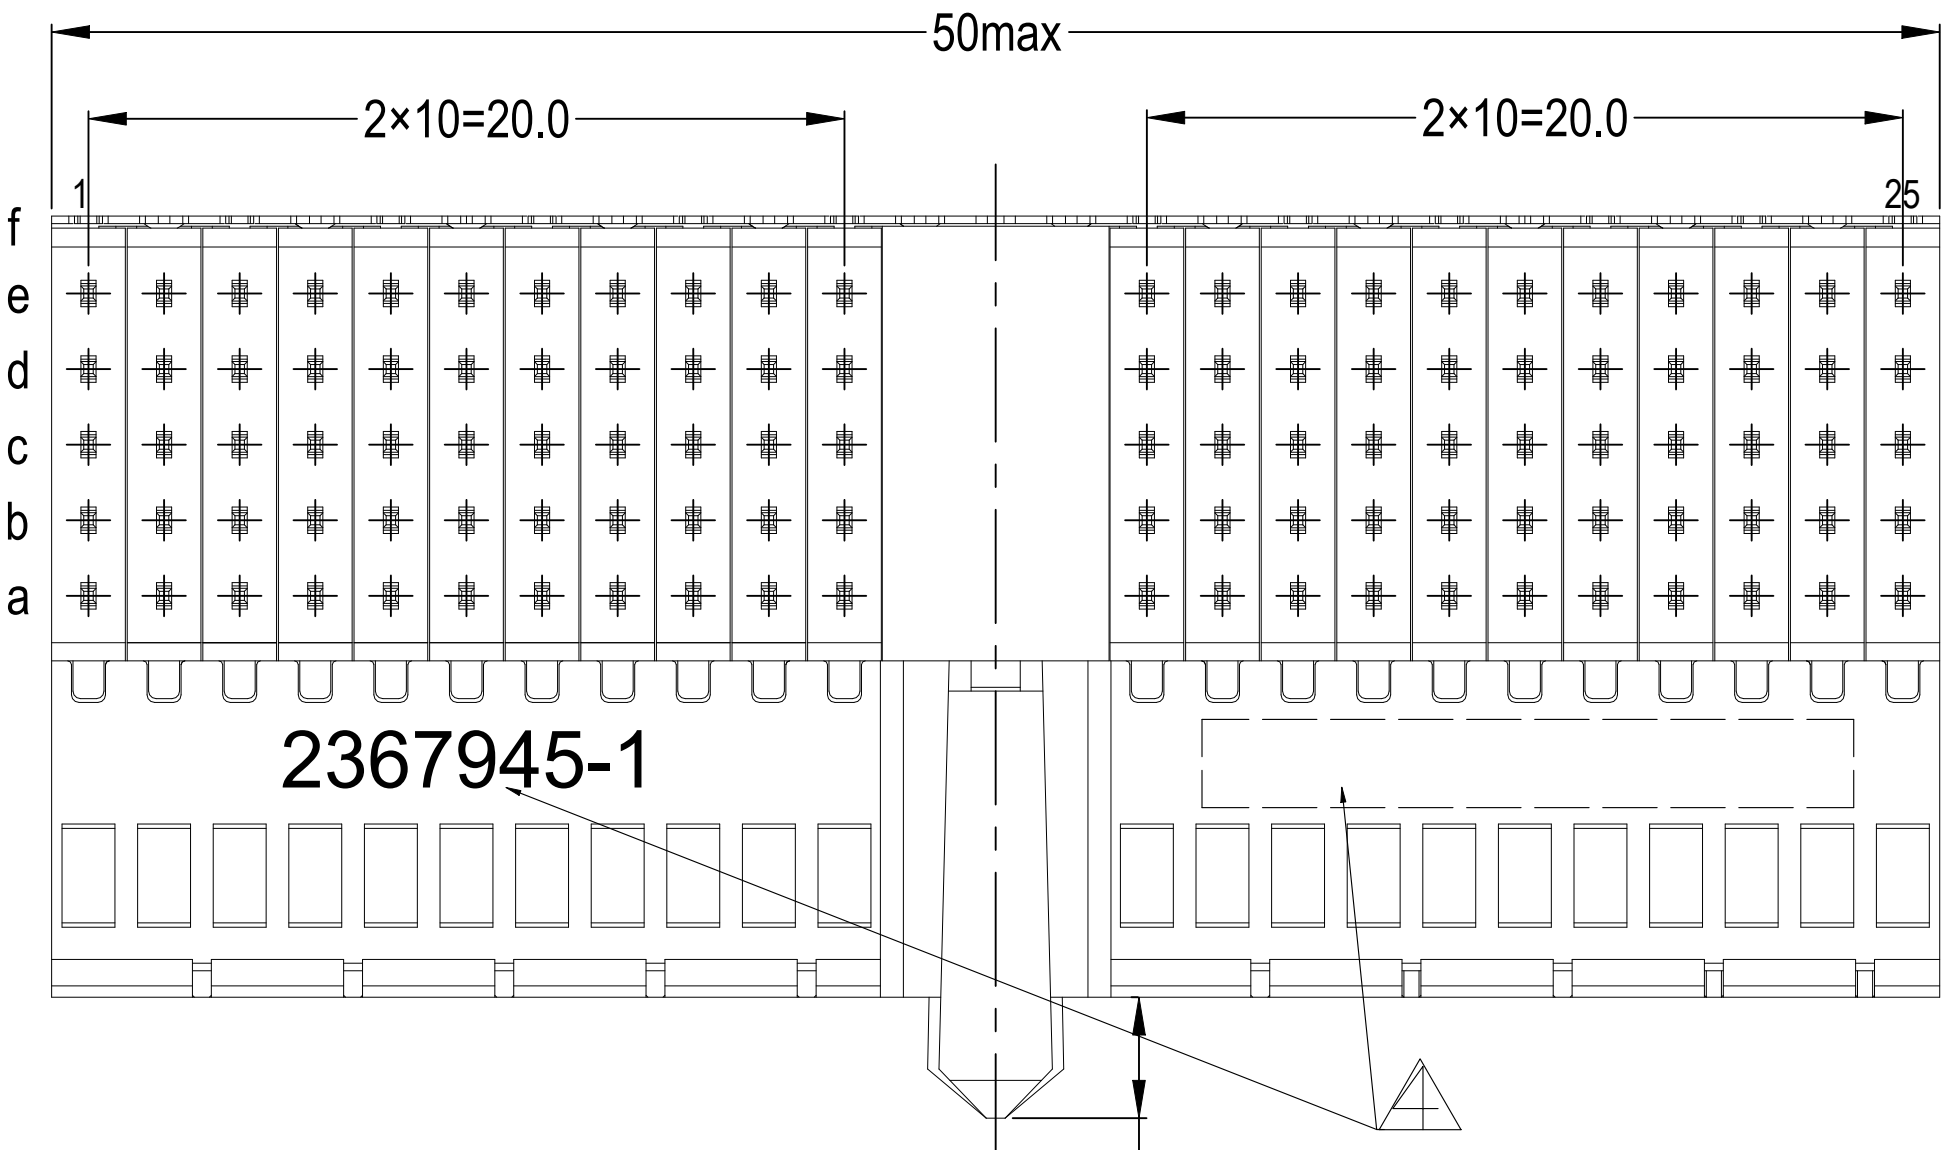

COMPONENT SIDE AS SHOWN
RECOMMENDED PCB-HOLE LAY-OUT

SEQUENCE COLUMNS ACCORDING CompactPCI	1	11	15	25
SEQUENCE COLUMNS ACCORDING IEC 61076-4-101 AND TYCO ELECTRONICS / AMP	25	15	11	1

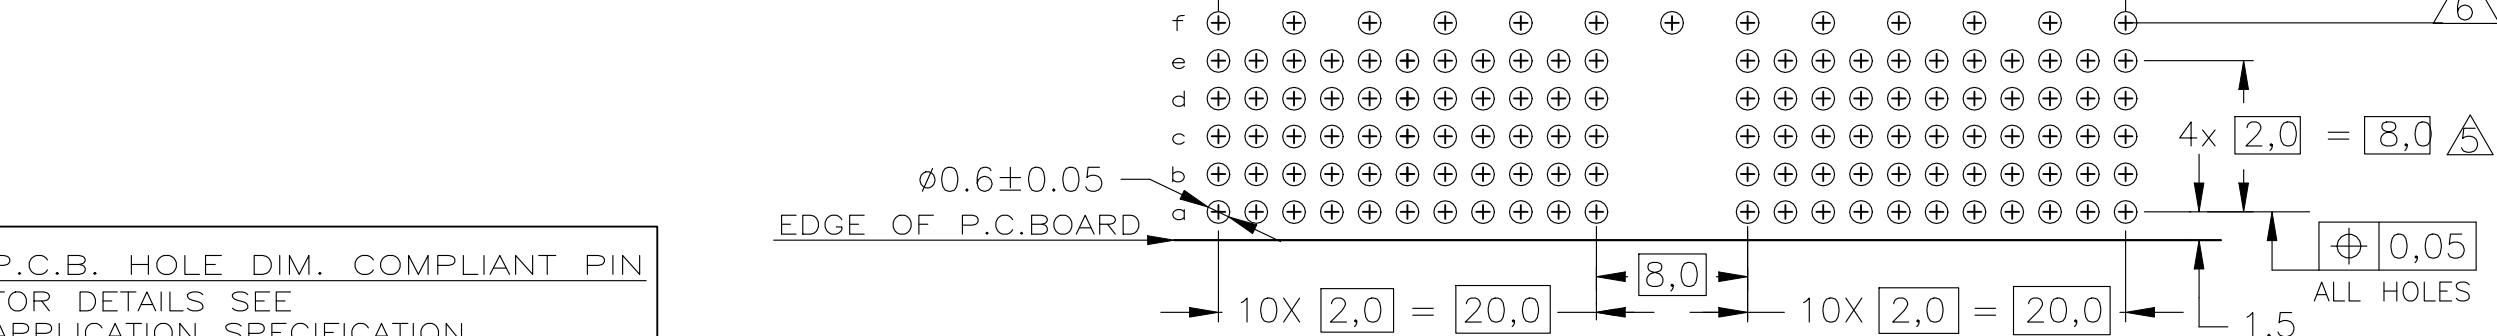

P.C.B. HOLE DIM. COMPLIANT PIN
FOR DETAILS SEE
APPLICATION SPECIFICATION

THIS DRAWING IS A CONTROLLED DOCUMENT.	
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: ±0.2
MATERIAL -	FINISH -

FINISH 2 3	MATERIAL 1	2367945-1
NAME TONY LI ALEX SHOAL HOPE LU	TE Connectivity Ltd.	
PRODUCT SPEC 108-60123 APPLICATION SPEC 114-19029	SIZE A2	CAGE CODE 00779
WEIGHT 0	DRAWING NO C-2367945	RESTRICTED TO -
CUSTOMER DRAWING	SCALE 5:1	SHEET 1 of 1