


Series 7200 – Style A 25, 154 Contacts



- Up to 110 signal contacts and 44 ground shield contacts in 5 or 5+2 rows of 25 positions
 - Center cavity with keying option (uses 3 positions)
 - See pages 52 and 53 for keying options
 - Designed for gas tight press-fit installations
 - This connector can be used by itself or in conjunction with Style B or C connectors
 - Twelve different contact styles are available for customizing connector to exact specifications (complete form on page 57)
 - Used in positions P1 and P4 of CompactPCI® specification
 - Prealignment guides
- 



LEAD-FREE
LEAD-FREE COMPATIBLE

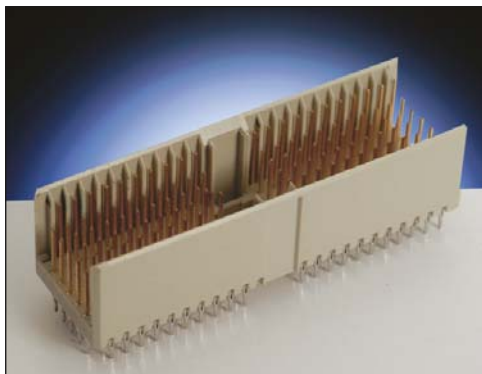



RoHS



DIMENSIONS: millimeters (inches)

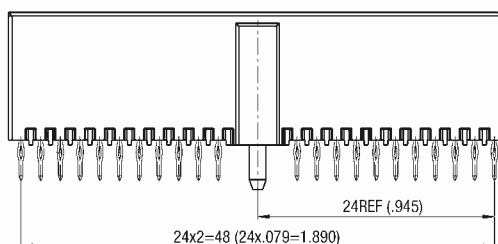

LAYOUT

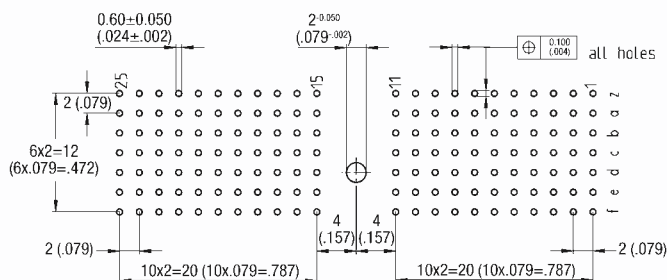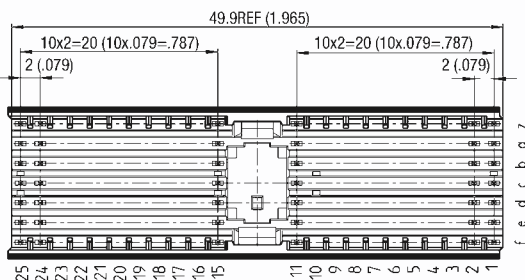

33