


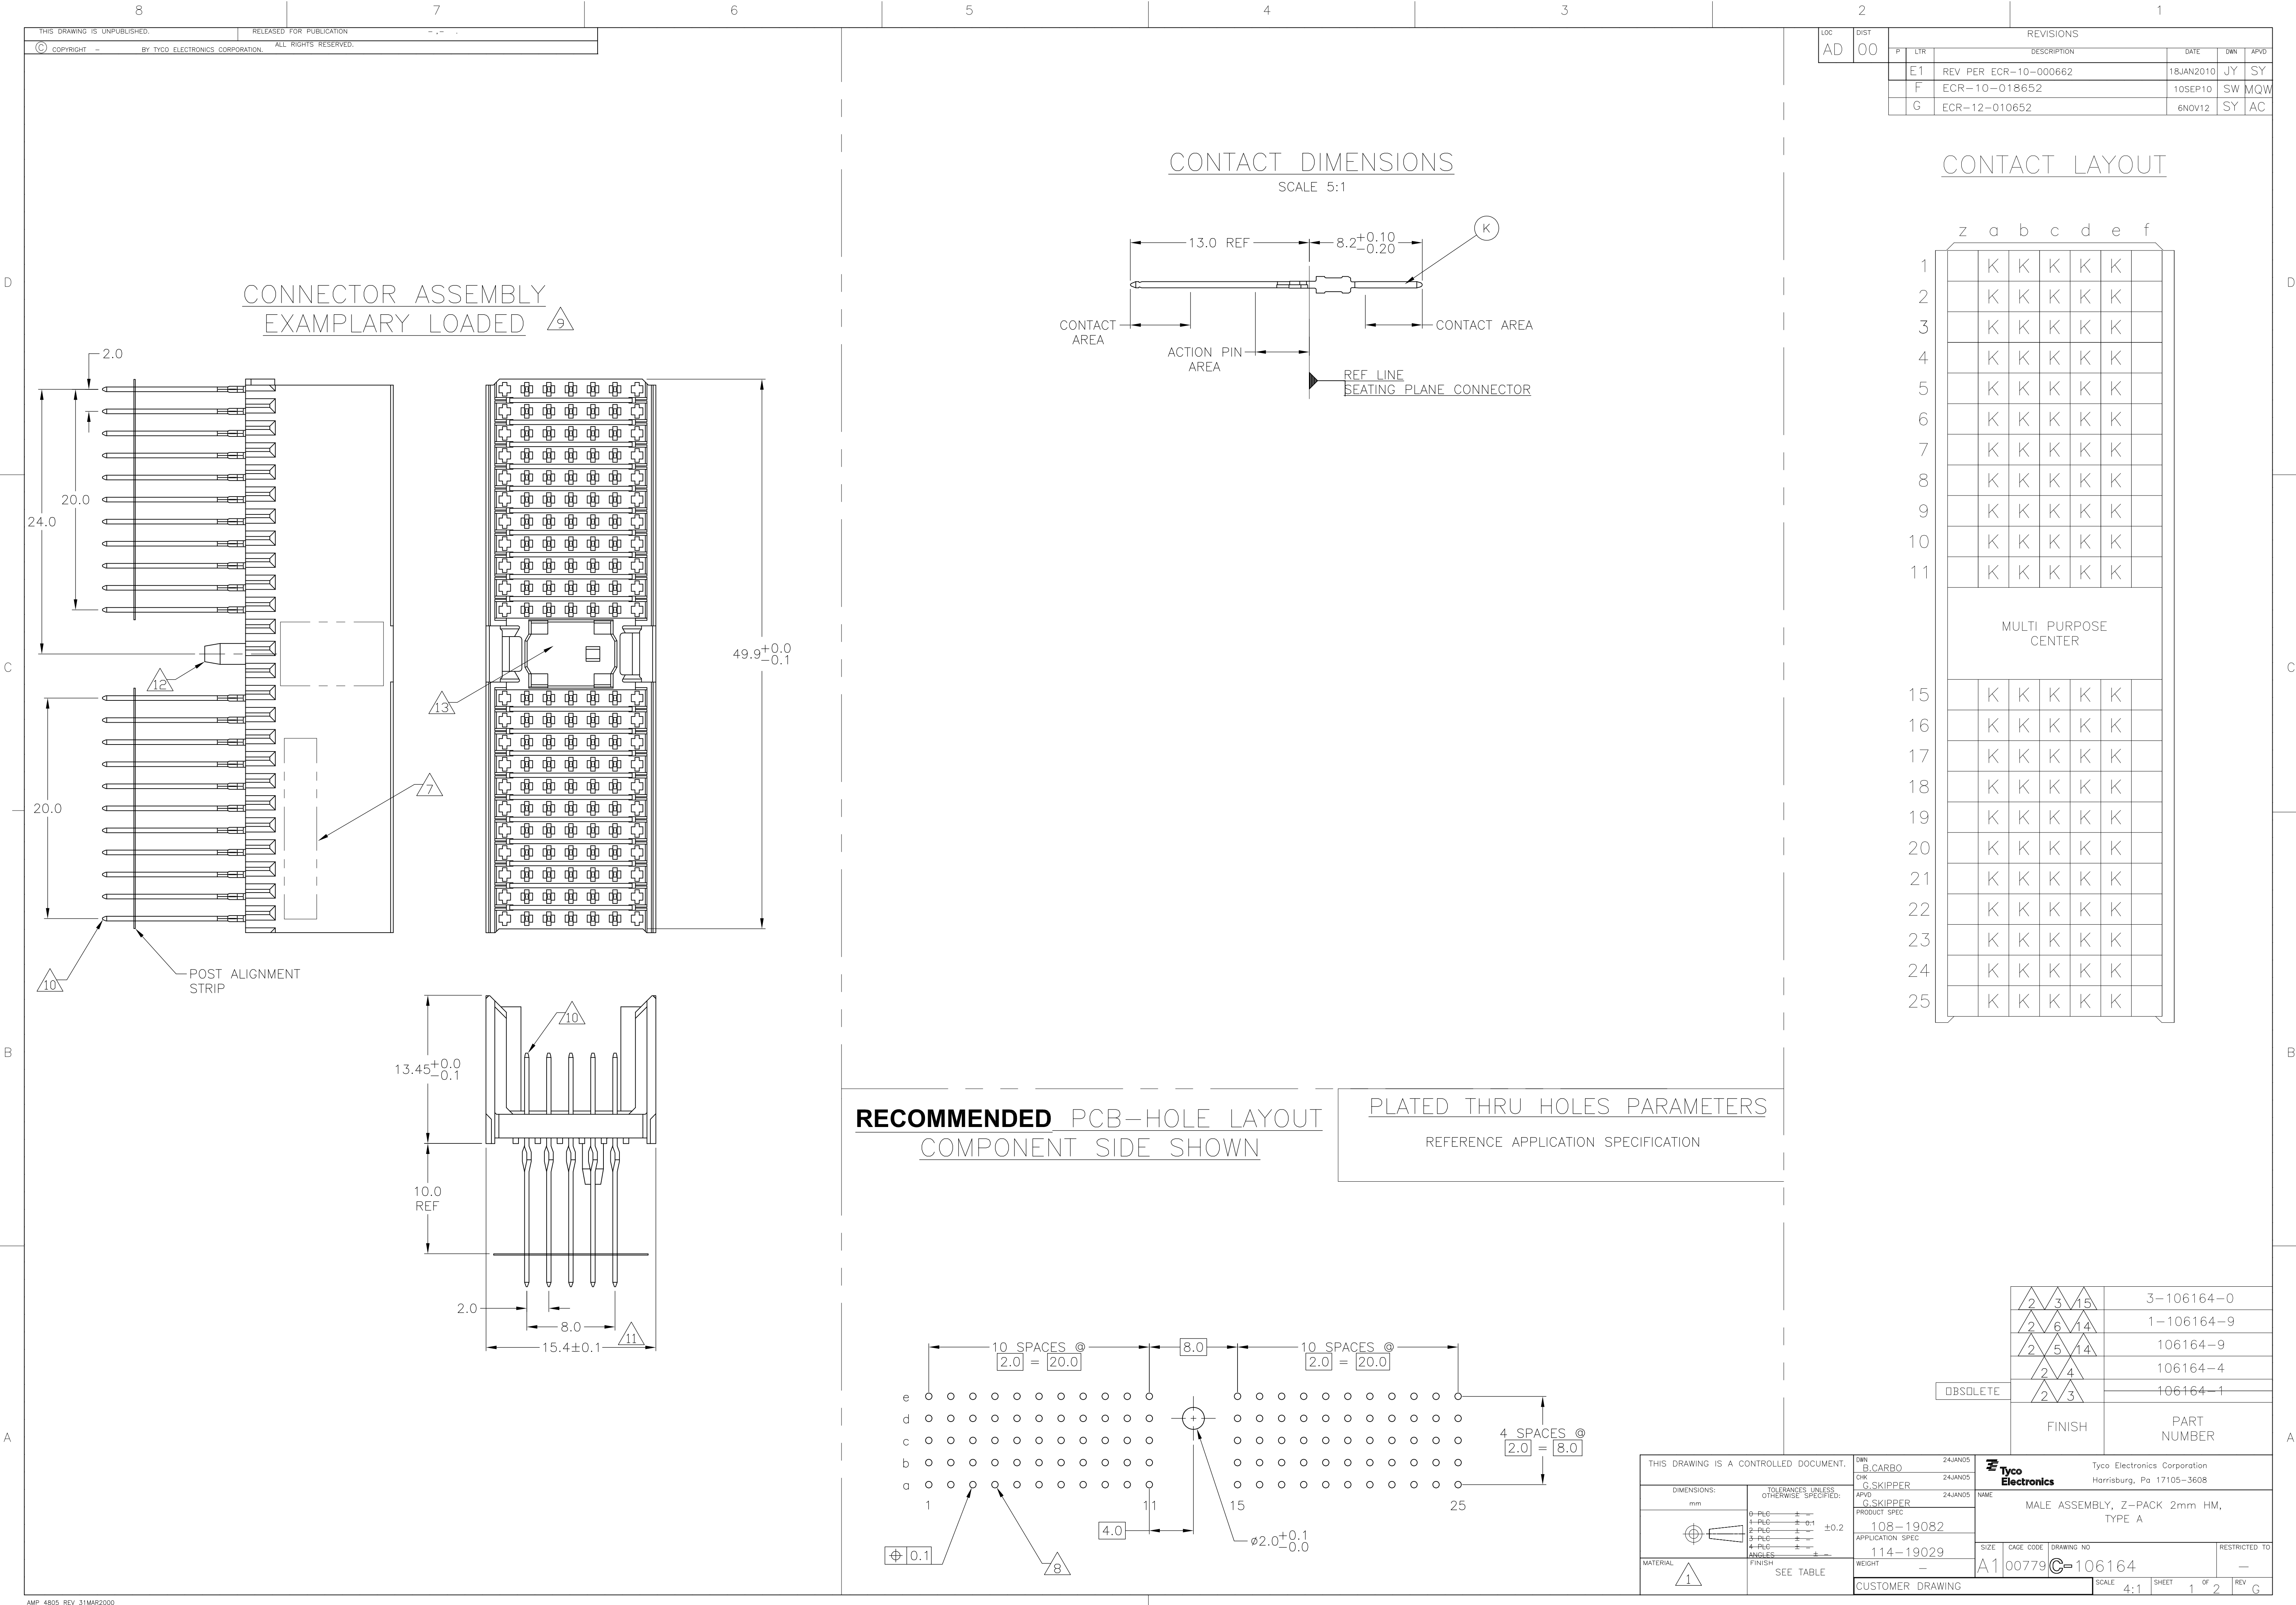

LOC		DIST		REVISIONS					
AD		00		P	LTR	DESCRIPTION	DATE	DWN	APVD
			—	SEE SHEET 1			—	—	—

- 1

MATERIAL:
CONTACT: PHOSPHOR BRONZE.
HOUSING: GLASS-FILLED POLYESTER.
- 2

GENERAL PLATING SPECIFICATION: UNDERPLATING
(ENTIRE CONTACT): 1.27µm MIN NICKEL AND ACTION
PIN: 0.5µm MIN TIN\LEAD.
FOR PLATING OF MATING SURFACES SEE APPLICABLE
SPECIFICATION REFERENCE FOR EACH DASH NUMBER.
- 3

CONFORMS TO ALL TESTING ACCORDING TO IEC 61076-4-101
PERFORMANCE LEVEL 2.
- 4

CONFORMS TO ALL TESTING ACCORDING TO IEC 61076-4-101
PERFORMANCE LEVEL 1.
- 5

CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL 3,
CENTRAL OFFICE APPLICATIONS.
- 6

CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL 3,
UNCONTROLLED ENVIROMENT APPLICATIONS.
- 7

CONNECTOR MARKED WITH PART NUMBER AND DATE CODE.
ADDITIONAL CHARACTERS OR MARKINGS, AS WELL AS THE LOCATION OF THE MARKINGS,
MAY BE ADDED FOR TRACEABILITY BASED UPON MANUFACTURERS DISCRETION.
- 8

PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID
PATTERN DEFINED BY CONTACT LAYOUT.
- 9

FOR ACTUAL PIN LOADING SEE "CONTACT LAYOUT".
- 10

FOR ACTUAL PIN DIMENSIONS SEE "CONTACT DIMENSIONS".
- 11


TO BE MEASURED AT BOTTOM OF SHROUD.
- 12

POLARIZATION FEATURE.
- 13

AREA RESERVED FOR KEYING PART (BASIC P/N 100525)
- 14

CONNECTOR LUBRICATED WITH BELCORE APPROVED LUBRICANT,
TECHNICAL REFERENCE: TR-NWT-001217 ISSUE 1, SEP 1992.
- 15

0.76µm MIN GOLD PLATING AT MATING SURFACES.

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN B CARBO	24JAN05	 Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
				CHK G SKIPPER	24JAN05		
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD G SKIPPER	24JAN05	NAME	MALE ASSEMBLY, Z-PACK 2mm HM, TYPE A
		0-PLC ±		PRODUCT SPEC			
		1-PLC ± 0.1		108-19082			
		2-PLC ±		APPLICATION SPEC			
		3-PLC ±		114-19029			
MATERIAL: SEE SHEET 1		FINISH: SEE SHEET 1		WEIGHT	A1 00779		RESTRICTED TO
				CUSTOMER DRAWING		SCALE	4:1
						SHEET	2
						OF	2
						REV	G