
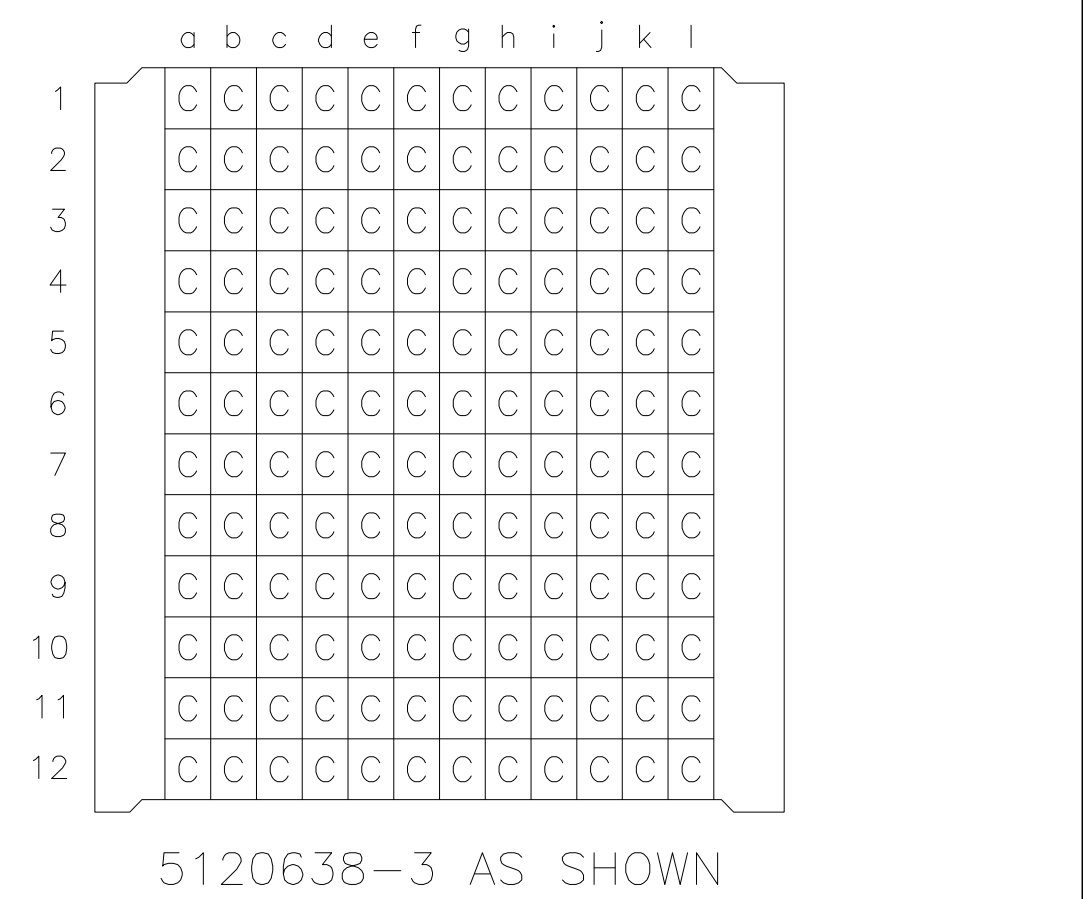
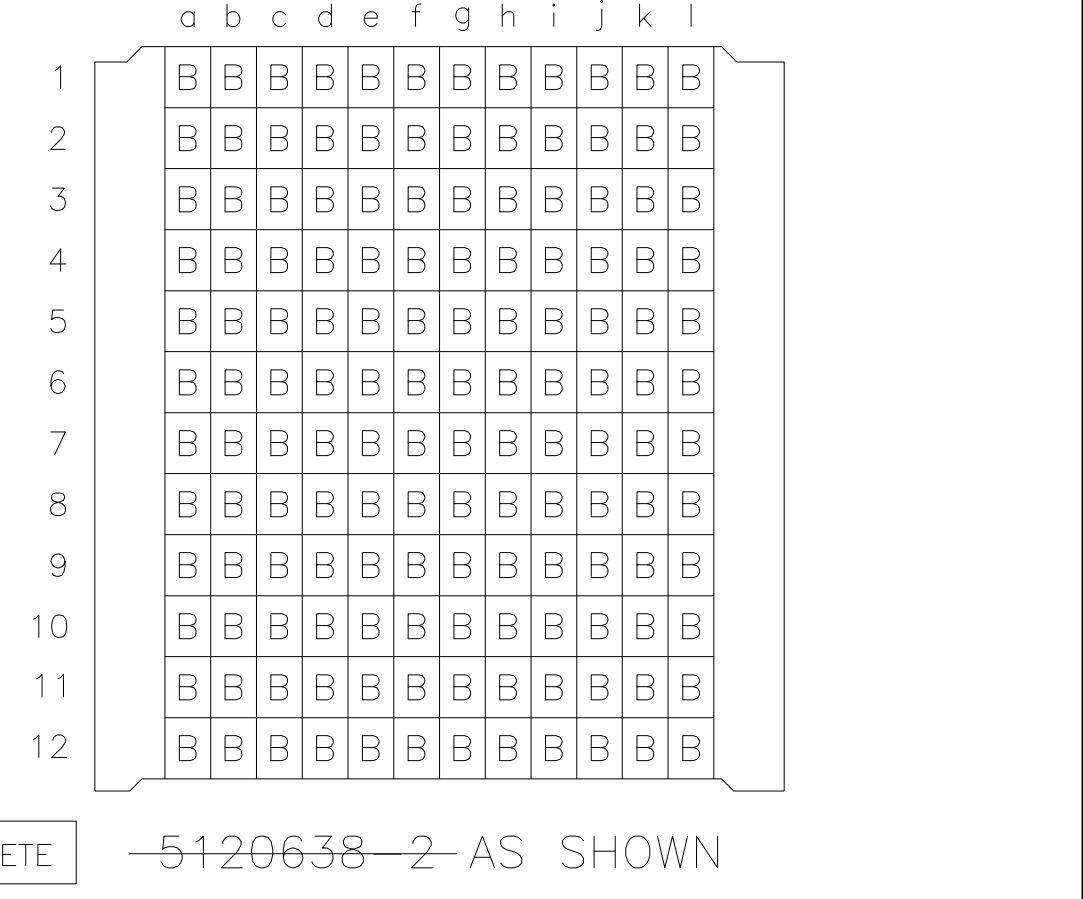
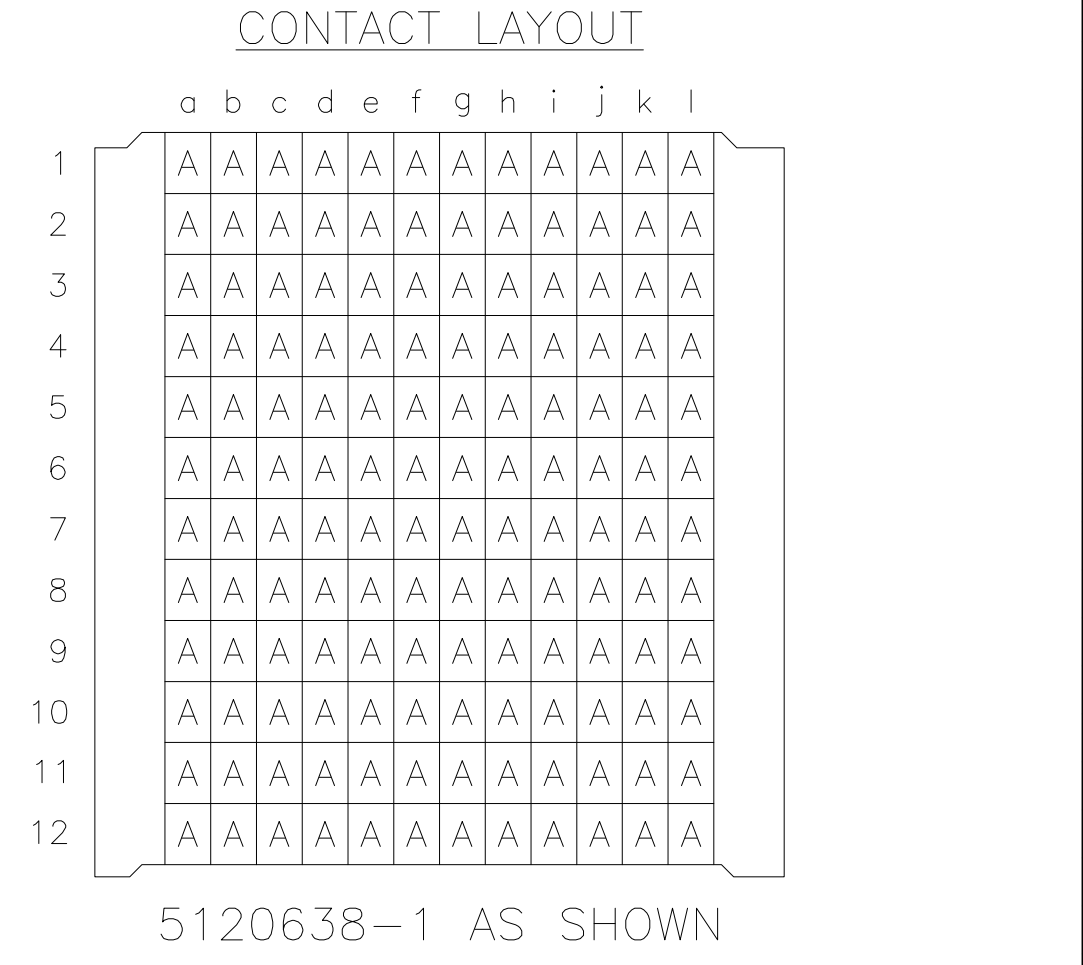
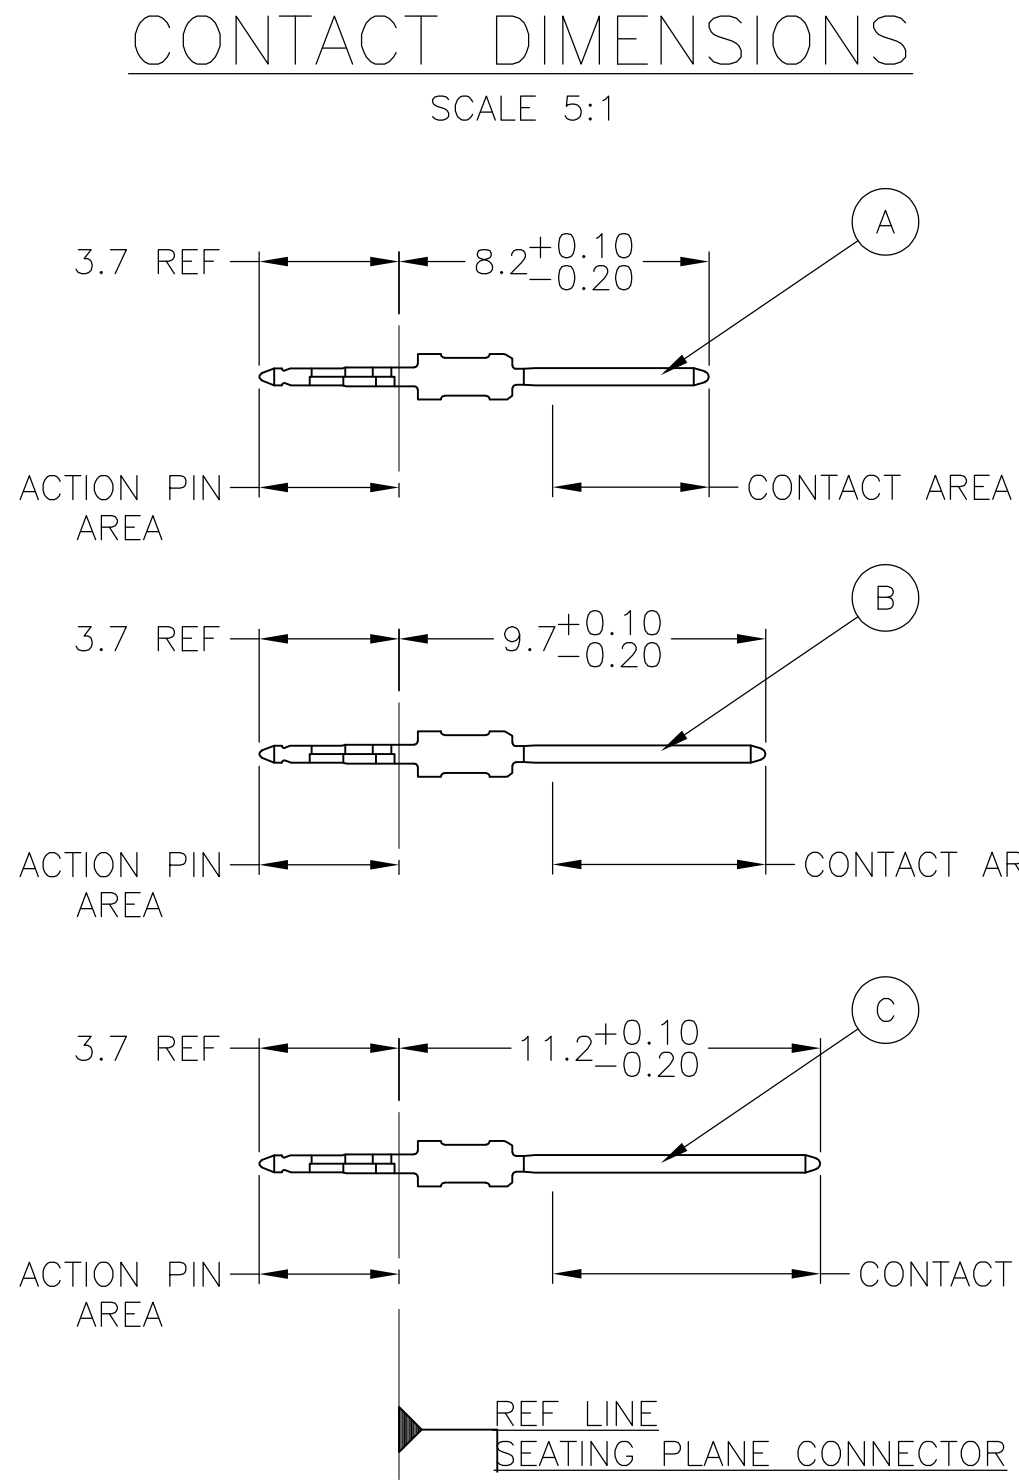



CONNECTOR ASSEMBLY
EXAMPLARY LOADED

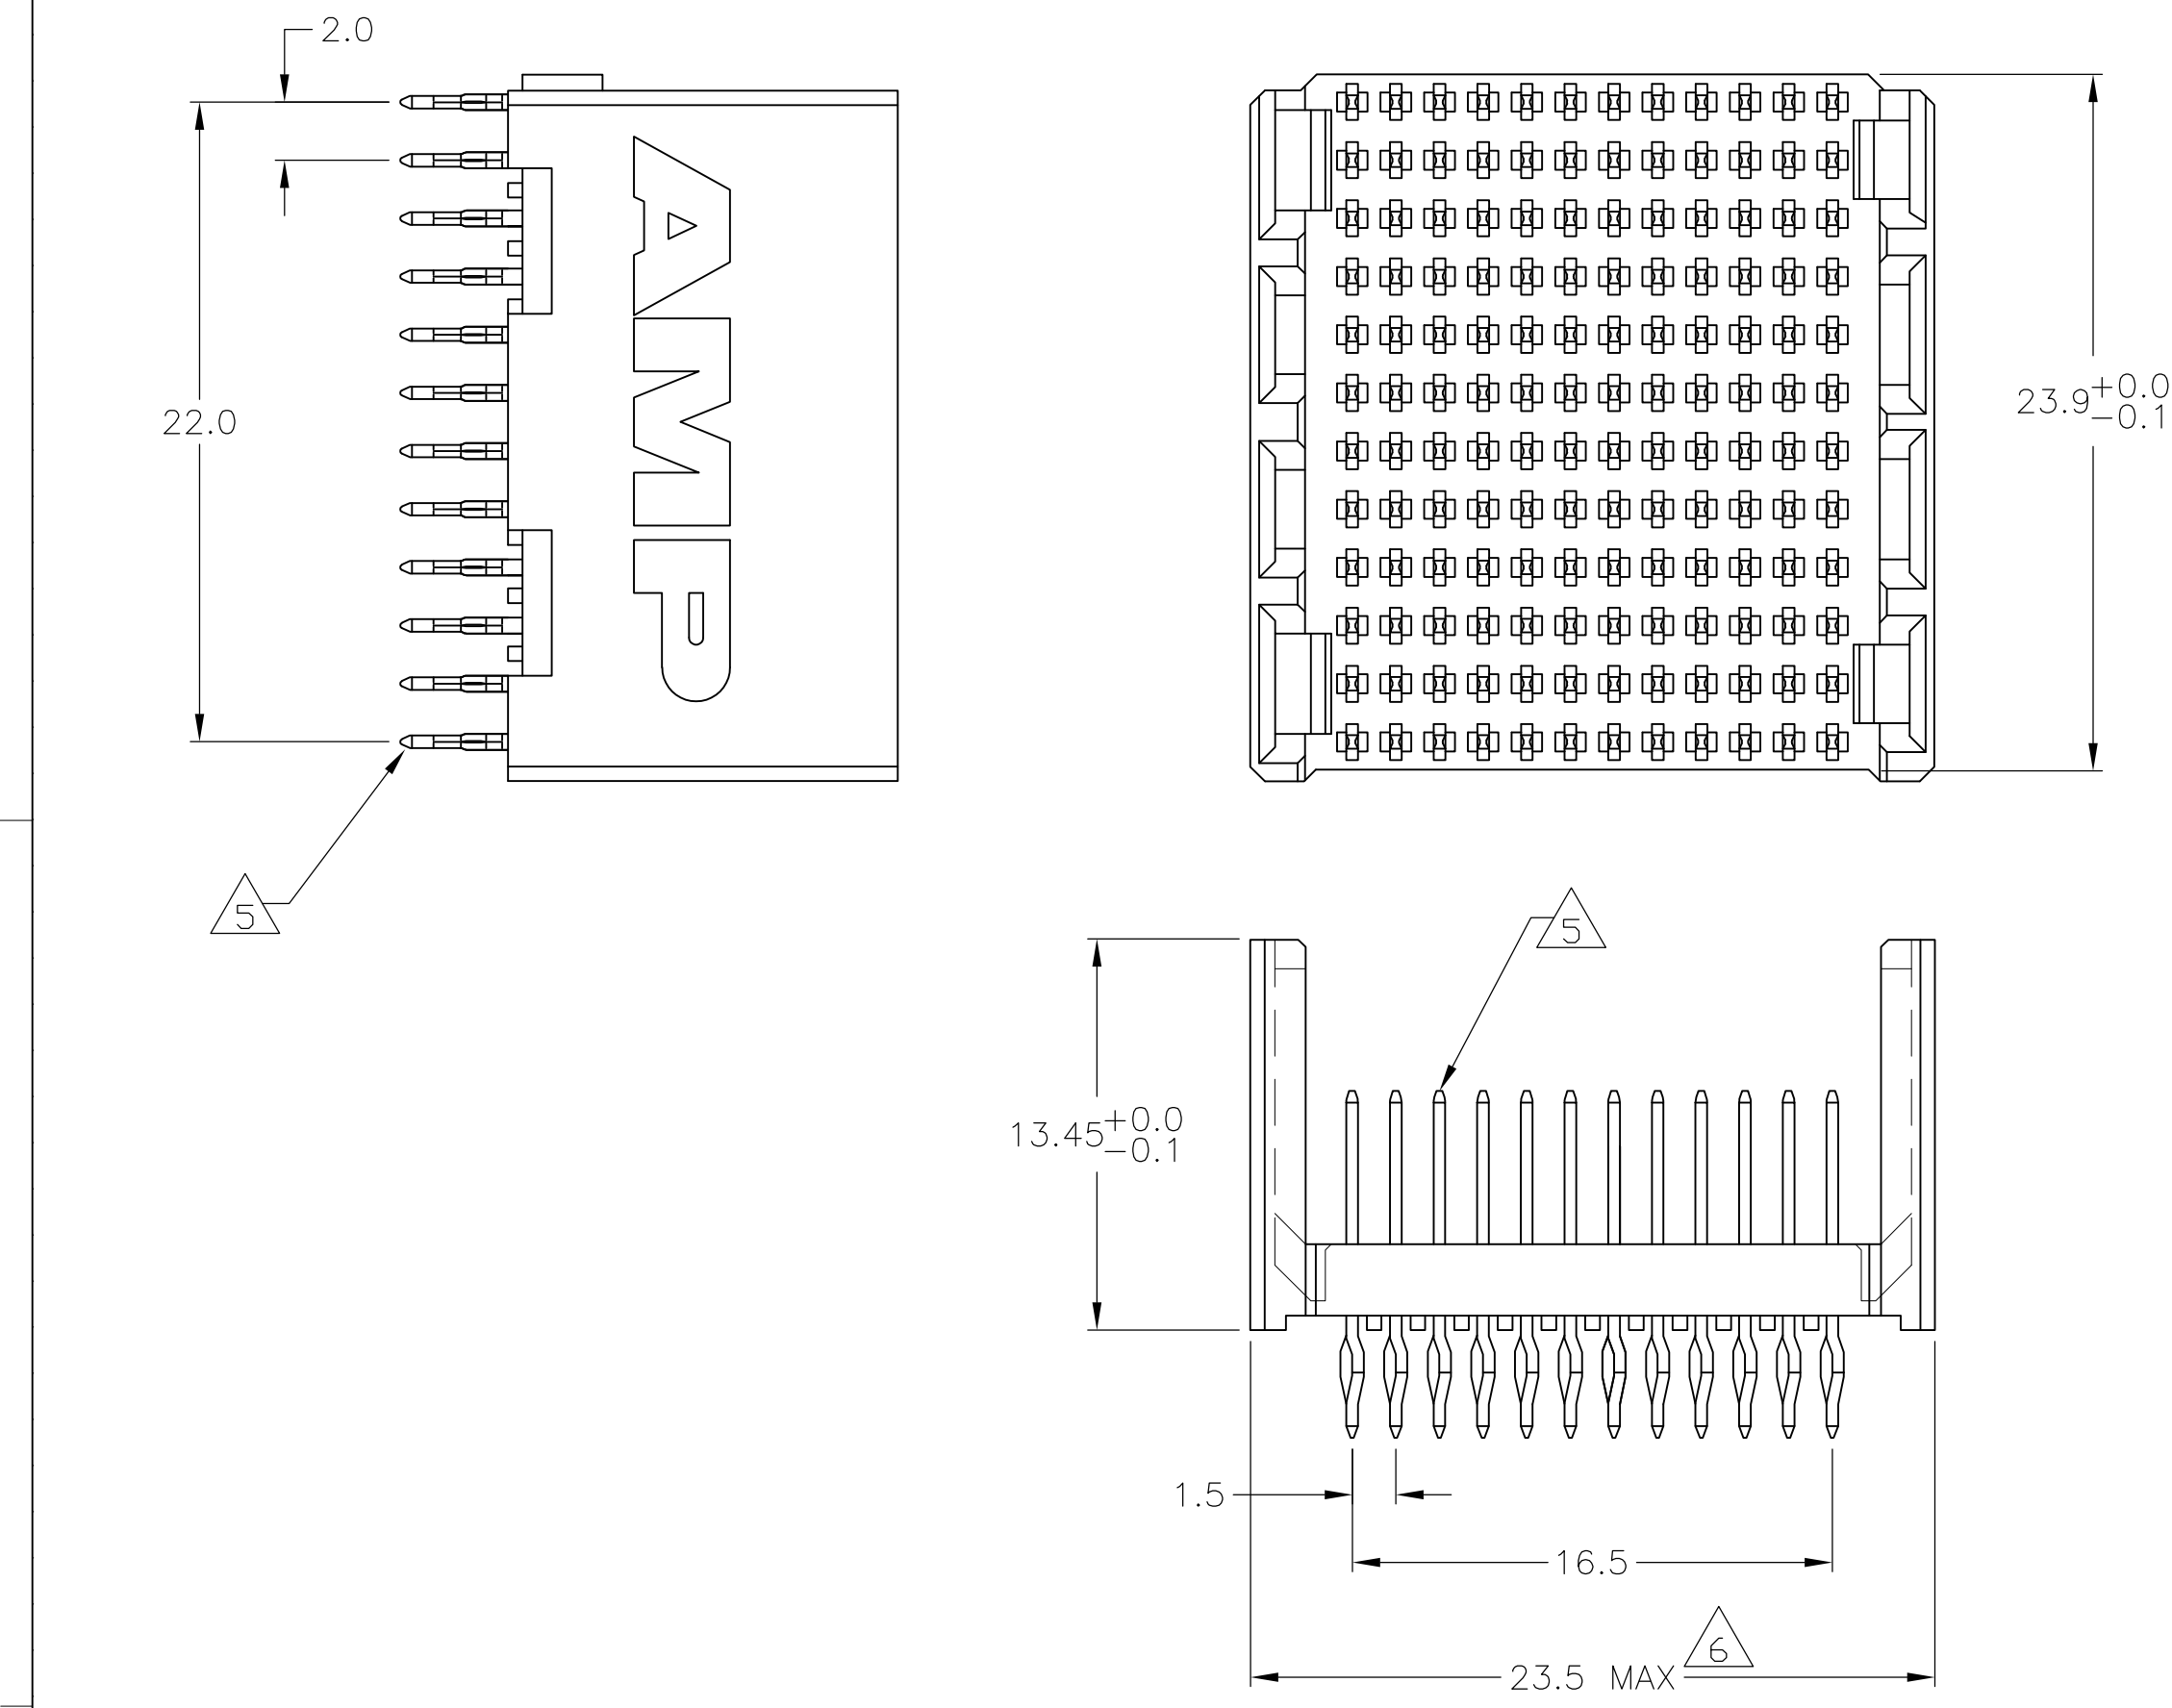

- 1
- CONFORMS TO ALL TESTING ACCORDING TO IEC 61076-4-101 PERFORMANCE LEVEL 2.
- 2
- MATERIAL:
CONTACT: PHOSPHOR BRONZE.
HOUSING: GLASS-FILLED POLYESTER.
- 3
- PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID PATTERN DEFINED BY CONTACT LAYOUT.
- 4
- FOR ACTUAL PIN LOADING SEE "CONTACT LAYOUT".
- 5
- FOR ACTUAL PIN DIMENSIONS SEE "CONTACT DIMENSIONS".
- 6
- TO BE MEASURED AT BOTTOM OF SHROUD.
- 7
- GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT): 1.27µm MIN NICKEL AND ACTION PIN: 0.5µm MIN TIN.
FOR PLATING OF MATING SURFACES SEE APPLICABLE SPECIFICATION REFERENCE FOR EACH DASH NUMBER
- 8
- OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

RECOMMENDED PCB-HOLE LAYOUT
COMPONENT SIDE SHOWN

PLATED THRU HOLES PARAMETERS
REFERENCE APPLICATION SPECIFICATION

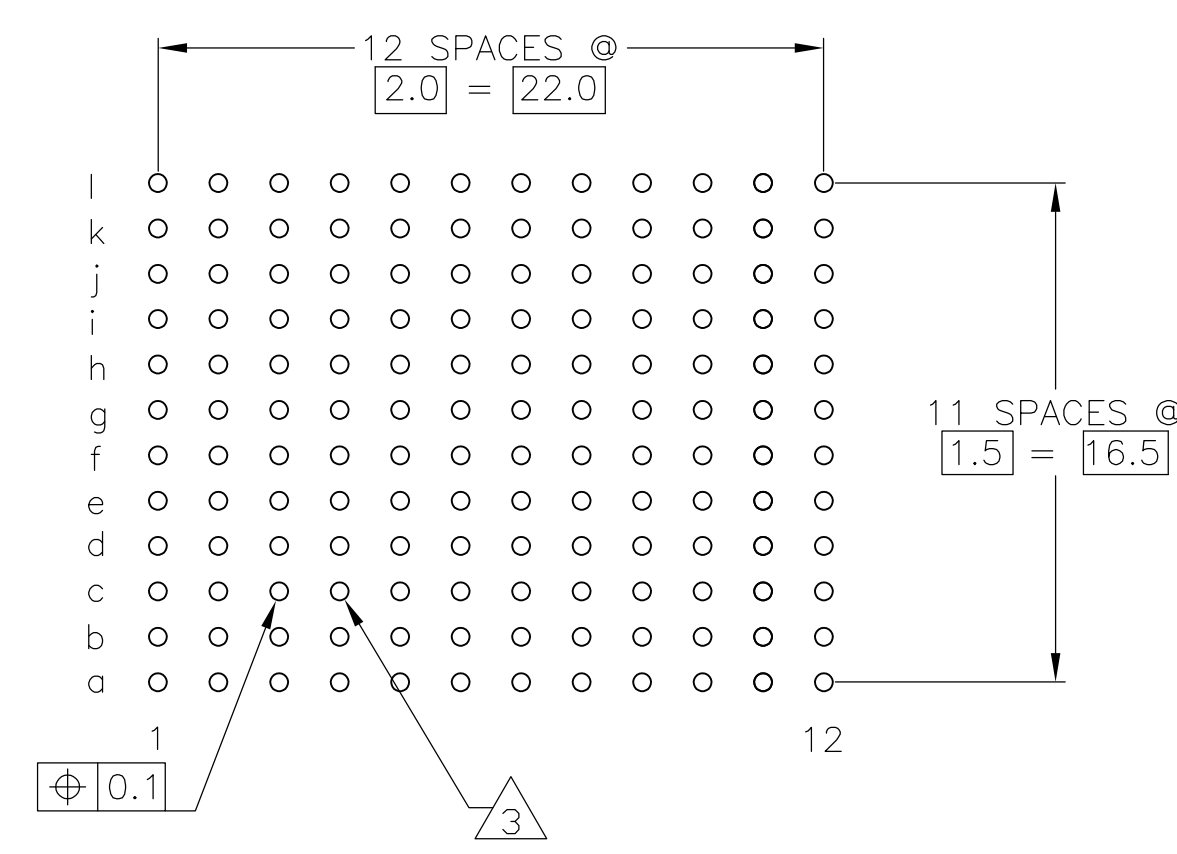

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

MATERIAL

2

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0-PLC ±
1-PLC ±0.1
2-PLC ±
3-PLC ±
4-PLC ±
ANGLES ±

±0.2

DWN B CARBO
CHK G SKIPPER
APVD G SKIPPER

01JUN05
01JUN05
01JUN05

NAME
PRODUCT SPEC
108-1738
APPLICATION SPEC
114-1132
WEIGHT
-

SIZE
A1

CAGE CODE
00779

DRAWING NO
5120638

RESTRICTED TO
-

CUSTOMER DRAWING

SCALE 4:1

SHEET 1 OF 1

REV C