
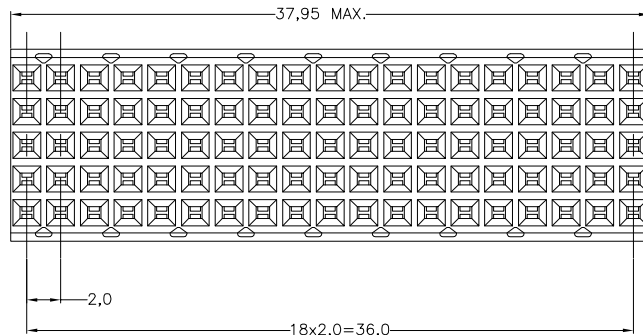






THIS DRAWING IS UNPUBLISHED.
RELEASED FOR PUBLICATION
ALL RIGHTS RESERVED.

LOC		DISP		REVISIONS			
P	LTR	DESCRIPTION	DATE	OWN	APP'D		
ES	00						
A		INITIAL RELEASE	14AUG2012	SY	AC		

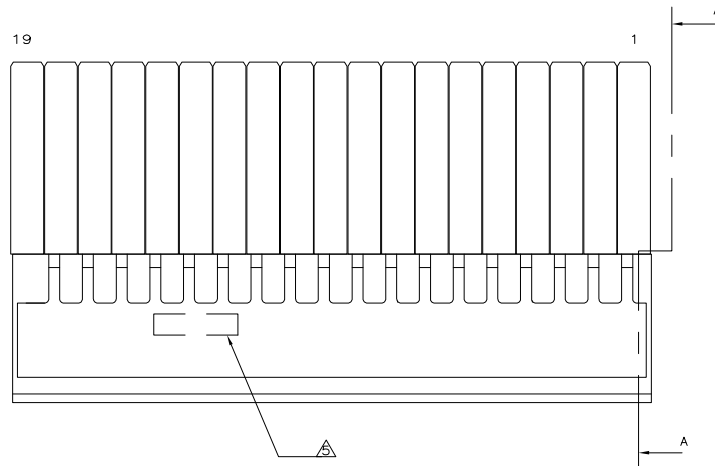

NOTES:

- MATERIAL CONTACT; PHOSPHORBRONZE
MATERIAL HOUSING;
GLASSFILLED POLYESTER UL-RATING 94VO (GRAY)
- GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT): 1,27µm NICKEL MIN.
AND ACTION PIN: 0,5µm TIN-LEAD MIN.
FOR PLATING OF MATING SURFACES SEE APPLICABLE SPECIFICATION REFERENCE FOR EACH DASH NUMBER.
- CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 2.
- CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 1.
- CONNECTOR PRINTED WITH PARTNUMBER AND DATECODE
THE MARKING CAN APPEAR ON THE FRONT SIDE OR ON THE BACK SIDE.
- PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID. 95 HOLES
FITS WITH INTEGRATED GROUND RETURN UPSHIELD,
BASIC P.N. 352028
AND INTEGRATED GROUND RETURN LOWERSHIELD,
BASIC P.N. 352029
- CONNECTOR ASSEMBLED WITH ALTERNATE FEMALE CONTACTS.
- 1,27µm MIN GOLD PLATING AT MATING SURFACES, NO LUBRICANT.

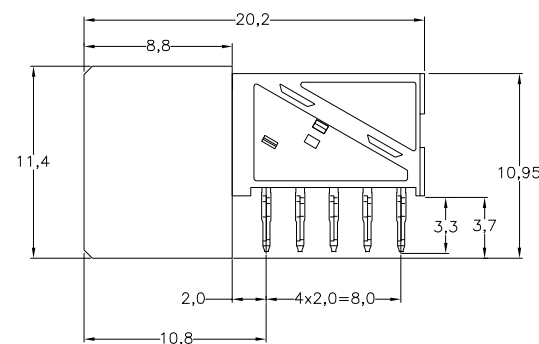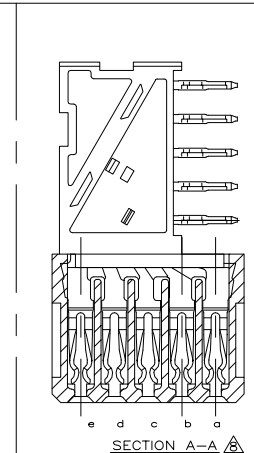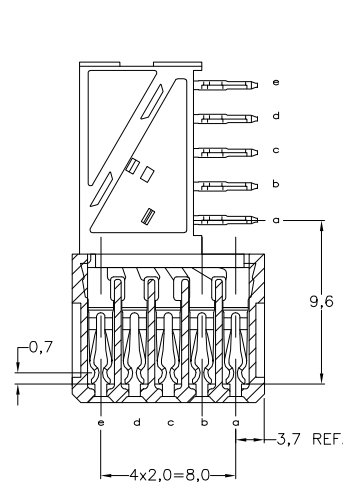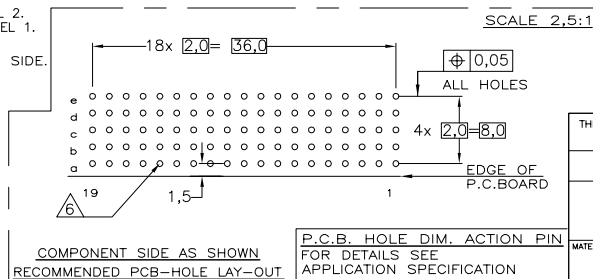

THIS DRAWING IS A CONTROLLED DOCUMENT.	
DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	
Ø	±0,2
1-PLC	±0,2
2-PLC	±0,2
3-PLC	±0,2
4-PLC	±0,2
5-PLC	±0,2
6-PLC	±0,2
7-PLC	±0,2
8-PLC	±0,2
9-PLC	±0,2
10-PLC	±0,2
11-PLC	±0,2
12-PLC	±0,2
13-PLC	±0,2
14-PLC	±0,2
15-PLC	±0,2
16-PLC	±0,2
17-PLC	±0,2
18-PLC	±0,2
19-PLC	±0,2
20-PLC	±0,2
21-PLC	±0,2
22-PLC	±0,2
23-PLC	±0,2
24-PLC	±0,2
25-PLC	±0,2
26-PLC	±0,2
27-PLC	±0,2
28-PLC	±0,2
29-PLC	±0,2
30-PLC	±0,2
31-PLC	±0,2
32-PLC	±0,2
33-PLC	±0,2
34-PLC	±0,2
35-PLC	±0,2
36-PLC	±0,2
37-PLC	±0,2
38-PLC	±0,2
39-PLC	±0,2
40-PLC	±0,2
41-PLC	±0,2
42-PLC	±0,2
43-PLC	±0,2
44-PLC	±0,2
45-PLC	±0,2
46-PLC	±0,2
47-PLC	±0,2
48-PLC	±0,2
49-PLC	±0,2
50-PLC	±0,2
51-PLC	±0,2
52-PLC	±0,2
53-PLC	±0,2
54-PLC	±0,2
55-PLC	±0,2
56-PLC	±0,2
57-PLC	±0,2
58-PLC	±0,2
59-PLC	±0,2
60-PLC	±0,2
61-PLC	±0,2
62-PLC	±0,2
63-PLC	±0,2
64-PLC	±0,2
65-PLC	±0,2
66-PLC	±0,2
67-PLC	±0,2
68-PLC	±0,2
69-PLC	±0,2
70-PLC	±0,2
71-PLC	±0,2
72-PLC	±0,2
73-PLC	±0,2
74-PLC	±0,2
75-PLC	±0,2
76-PLC	±0,2
77-PLC	±0,2
78-PLC	±0,2
79-PLC	±0,2
80-PLC	±0,2
81-PLC	±0,2
82-PLC	±0,2
83-PLC	±0,2
84-PLC	±0,2
85-PLC	±0,2
86-PLC	±0,2
87-PLC	±0,2
88-PLC	±0,2
89-PLC	±0,2
90-PLC	±0,2
91-PLC	±0,2
92-PLC	±0,2
93-PLC	±0,2
94-PLC	±0,2
95-PLC	±0,2
96-PLC	±0,2
97-PLC	±0,2
98-PLC	±0,2
99-PLC	±0,2
100-PLC	±0,2

FINISH		MATERIAL		2170349-5	
SANDERS YAN		TE Connectivity		PARTNUMBER	
APVD ALEX CAI		NAME		Z-PACK 2MM HM 95 POS. (19 COLUMNS)	
108-19082		APPLICATION SPEC		FEMALE DAUGHTER CARD CONNECTOR	
114-19029		SIZE		CAGE CODE	
-		A2		DRAWING NO	
-		00779		C=2170349	
CUSTOMER DRAWING		SCALE		NTS	
		SHEET		1 of 1	
		REV		A	