



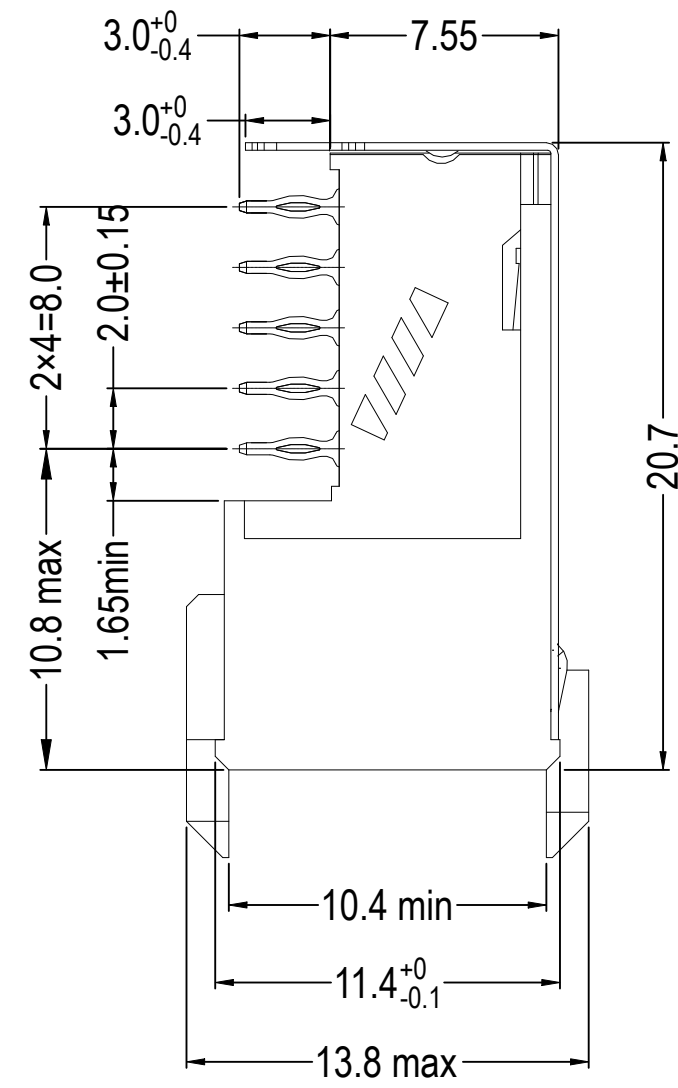

①	MATERIAL CONTACTS; COPPER ALLOY MATERIAL HOUSING; GLASSFILLED POLYESTER
②	GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT): 1,27μm NICKEL MIN. AND EON PIN: 0,5μm TIN MIN. FOR PLATING OF MATING SURFACES SEE APPLICABLE SPECIFICATION REFERENCE FOR EACH DASH NUMBER.
③	CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 2.
④	ASSEMBLY PRINTED WITH P/N AND DATECODE

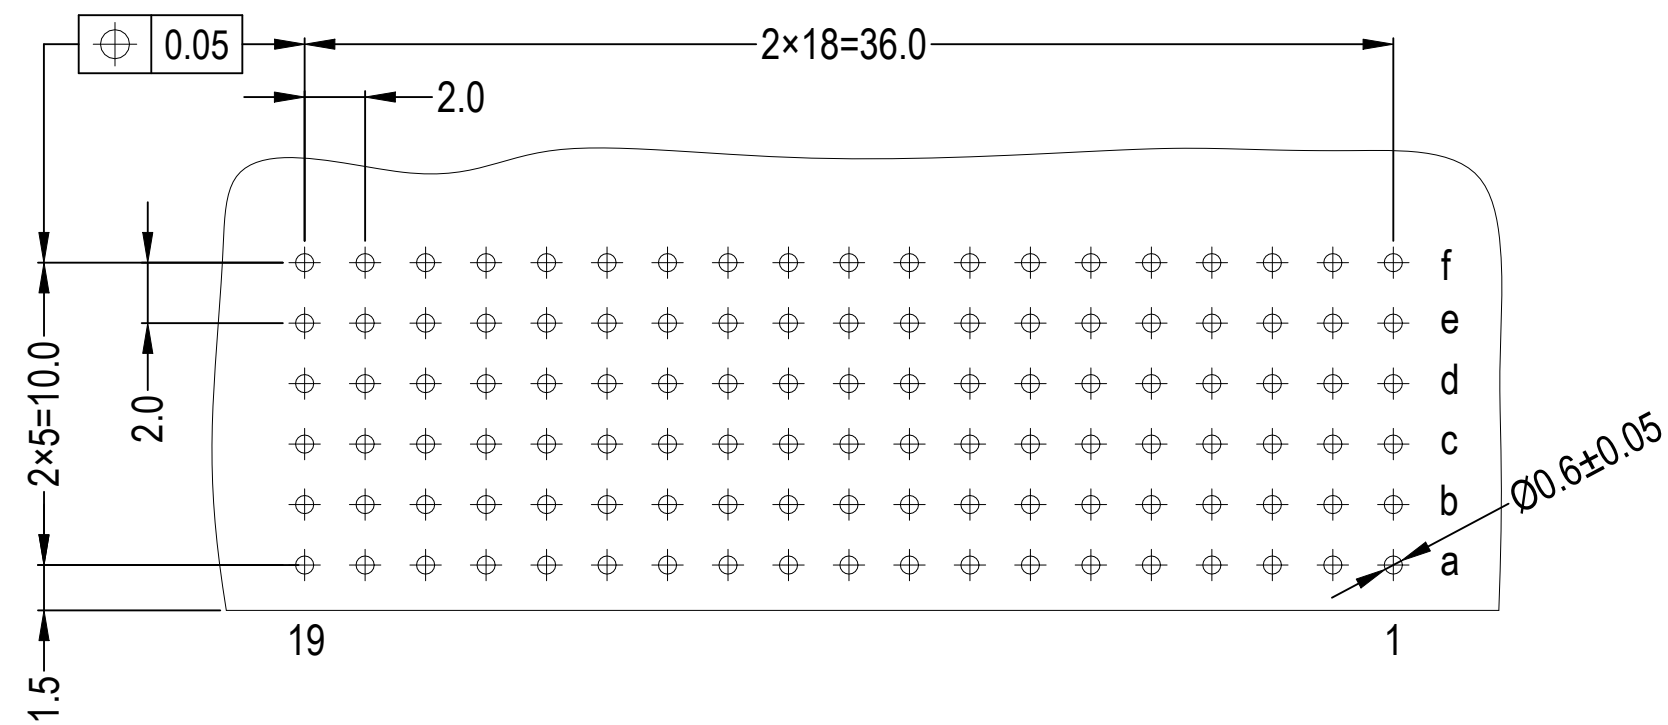

				2392921-1	
FINISH		MATERIAL		PART NUMBER	
CONTROLLED DOCUMENT.		DWN 28MAY2021 TONY LI CHK 28MAY2021 ALEX XU APVD 28MAY2021 HOPE LU		 TE Connectivity Ltd.	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME			
PLC $\pm$ = PLC $\pm$ = PLC $\pm$ = ± 0.2 PLC $\pm$ = PLC $\pm$ = GLFS $\pm$ = $\pm$		Z-PACK 2mm HM WITH UPPER SHIELD TYPE A/B - 19 COLUMNS RECEPTACLE ,EON			
PRODUCT SPEC 108-19082 APPLICATION SPEC 114-160149		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
WEIGHT 0		A2	00779	C=2392921	-
CUSTOMER DRAWING		SCALE		SHEET	REV
		5:1		1 of 1	A