



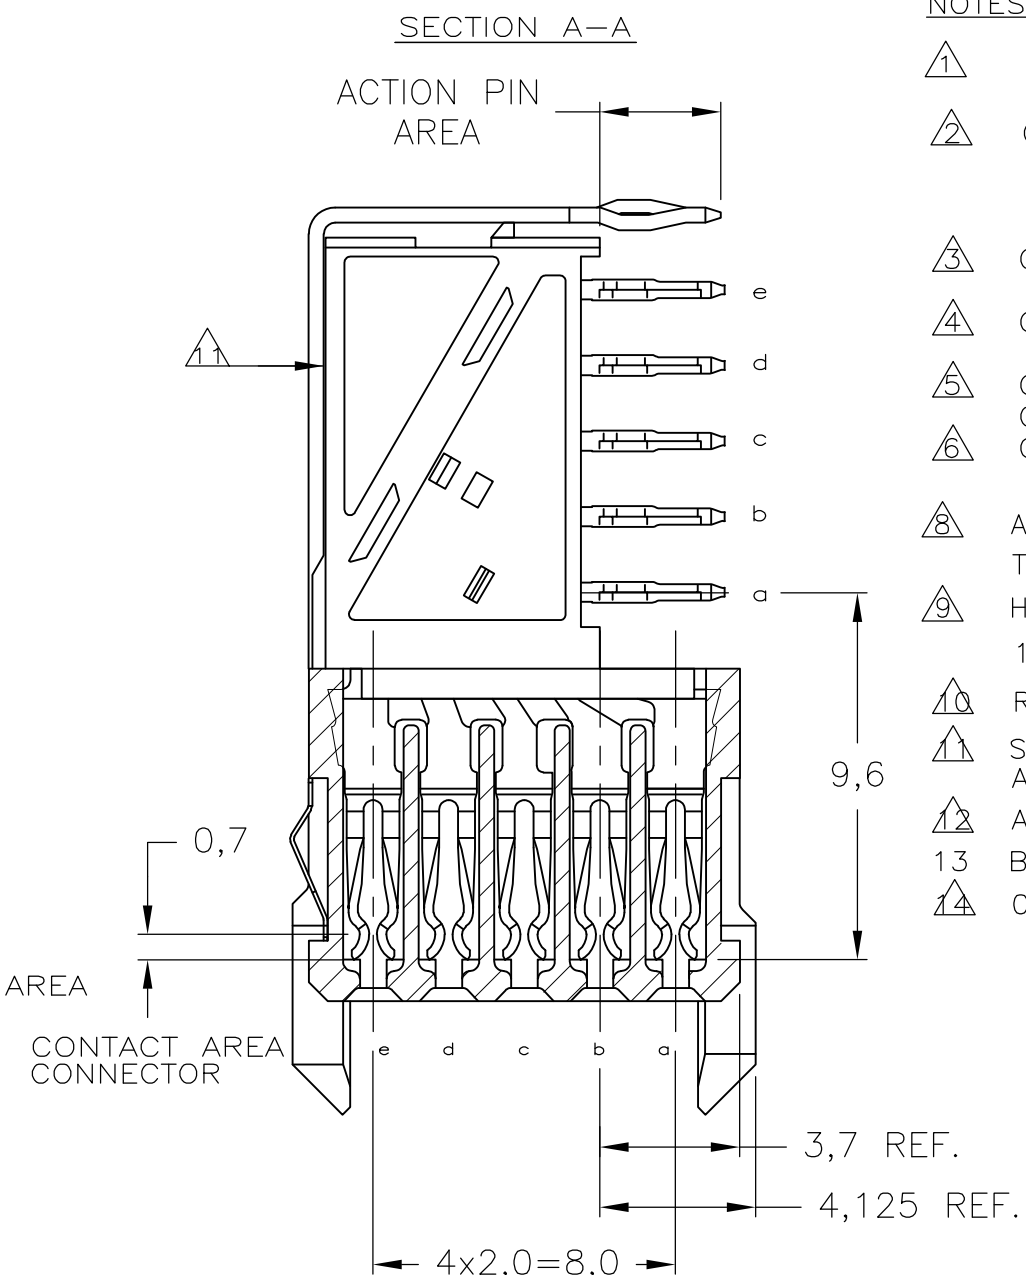

- ① MATERIAL CONTACTS; PHOSPHORBRONZE
MATERIAL HOUSING; GLASSFILLED POLYESTER (GRAY)
- ② GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT):
1,27μm NICKEL MIN. AND ACTION PIN: 0,5μm TIN MIN.
FOR PLATING OF MATING SURFACES SEE APPLICABLE SPECIFICATION
REFERENCE FOR EACH DASH NUMBER.
- ③ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101
PERFORMANCE LEVEL 2.
- ④ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101
PERFORMANCE LEVEL 1.
- ⑤ CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA
GR-1217-CORE QUALITY LEVEL III, CENTRAL OFFICE APPLICATIONS.
- ⑥ CONNECTOR LUBRICATED WITH TELCORDIAGR-1217-CORE
APPROVED LUBRICANT.
- ⑧ ASSEMBLY PRINTED WITH P/N AND DATECODE
THE MARKING CAN APPEAR ON THE FRONT SIDE OR BACK SIDE.
- ⑨ HOLE PATTERN FOR FEMALE CONNECTOR TYPE A
110 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID
- ⑩ ROW "r" 13 PLATED THROUGH HOLES FOR UPPERSHIELD
- ⑪ SHIELD MOUNTED ON CONNECTOR WITH DOUBLE SIDED
ADHESIVE TAPE OR ADHESIVE
- ⑫ AREA RESERVED FOR KEYING PART (BASIC P.N. 100526)
13 BASIC P.N. LOWERSHIELD: 5338108
- ⑬ 0,76μm MIN GOLD PLATING AT MATING SURFACE

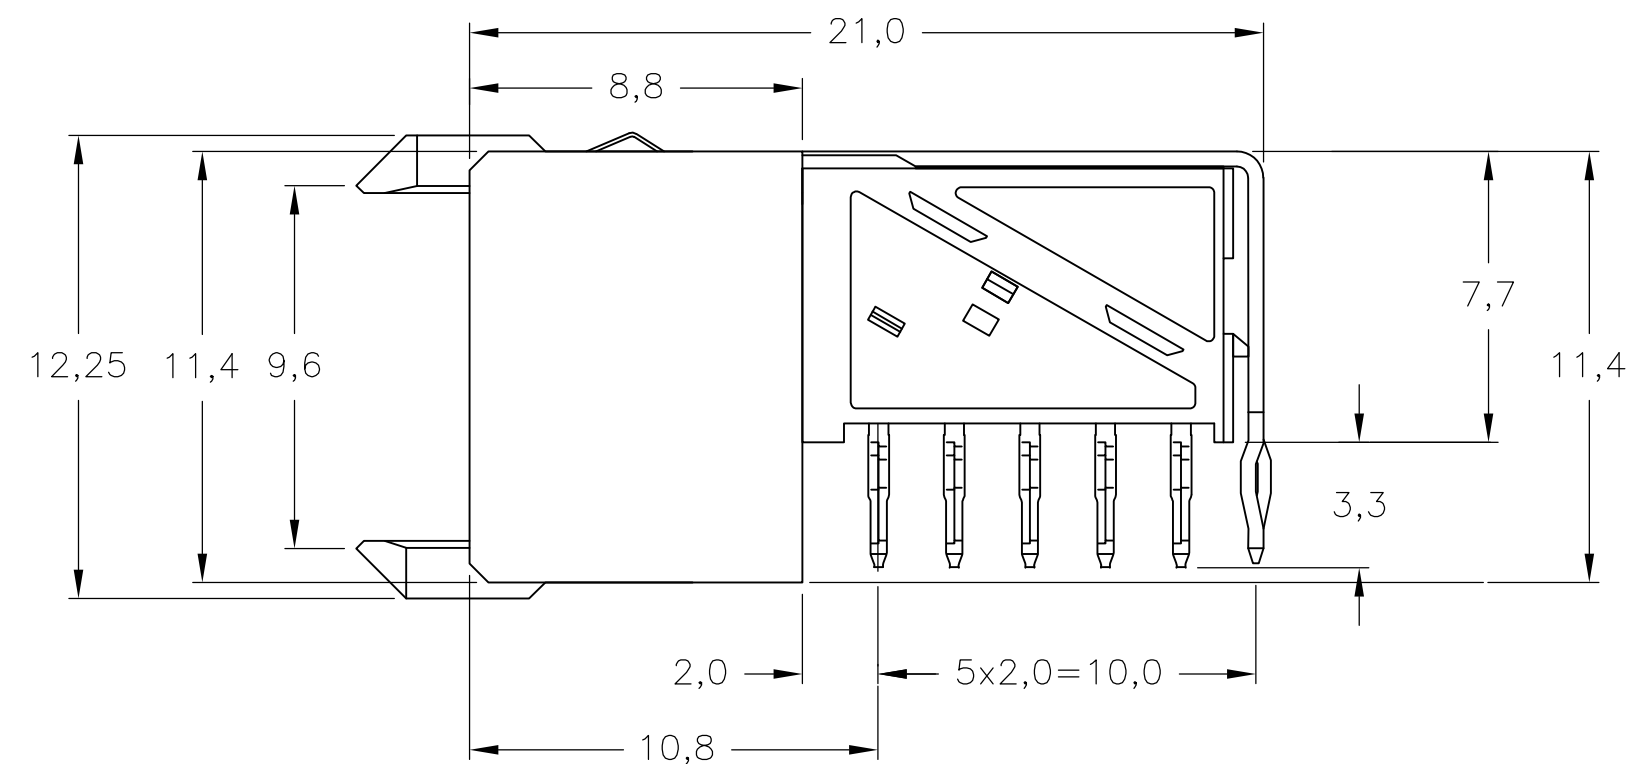

SCALE 2,5:1

		3-5352068-0
		5352068-9
		5352068-4
		5352068-1
FINISH	MATERIAL	PART NUMBER

