



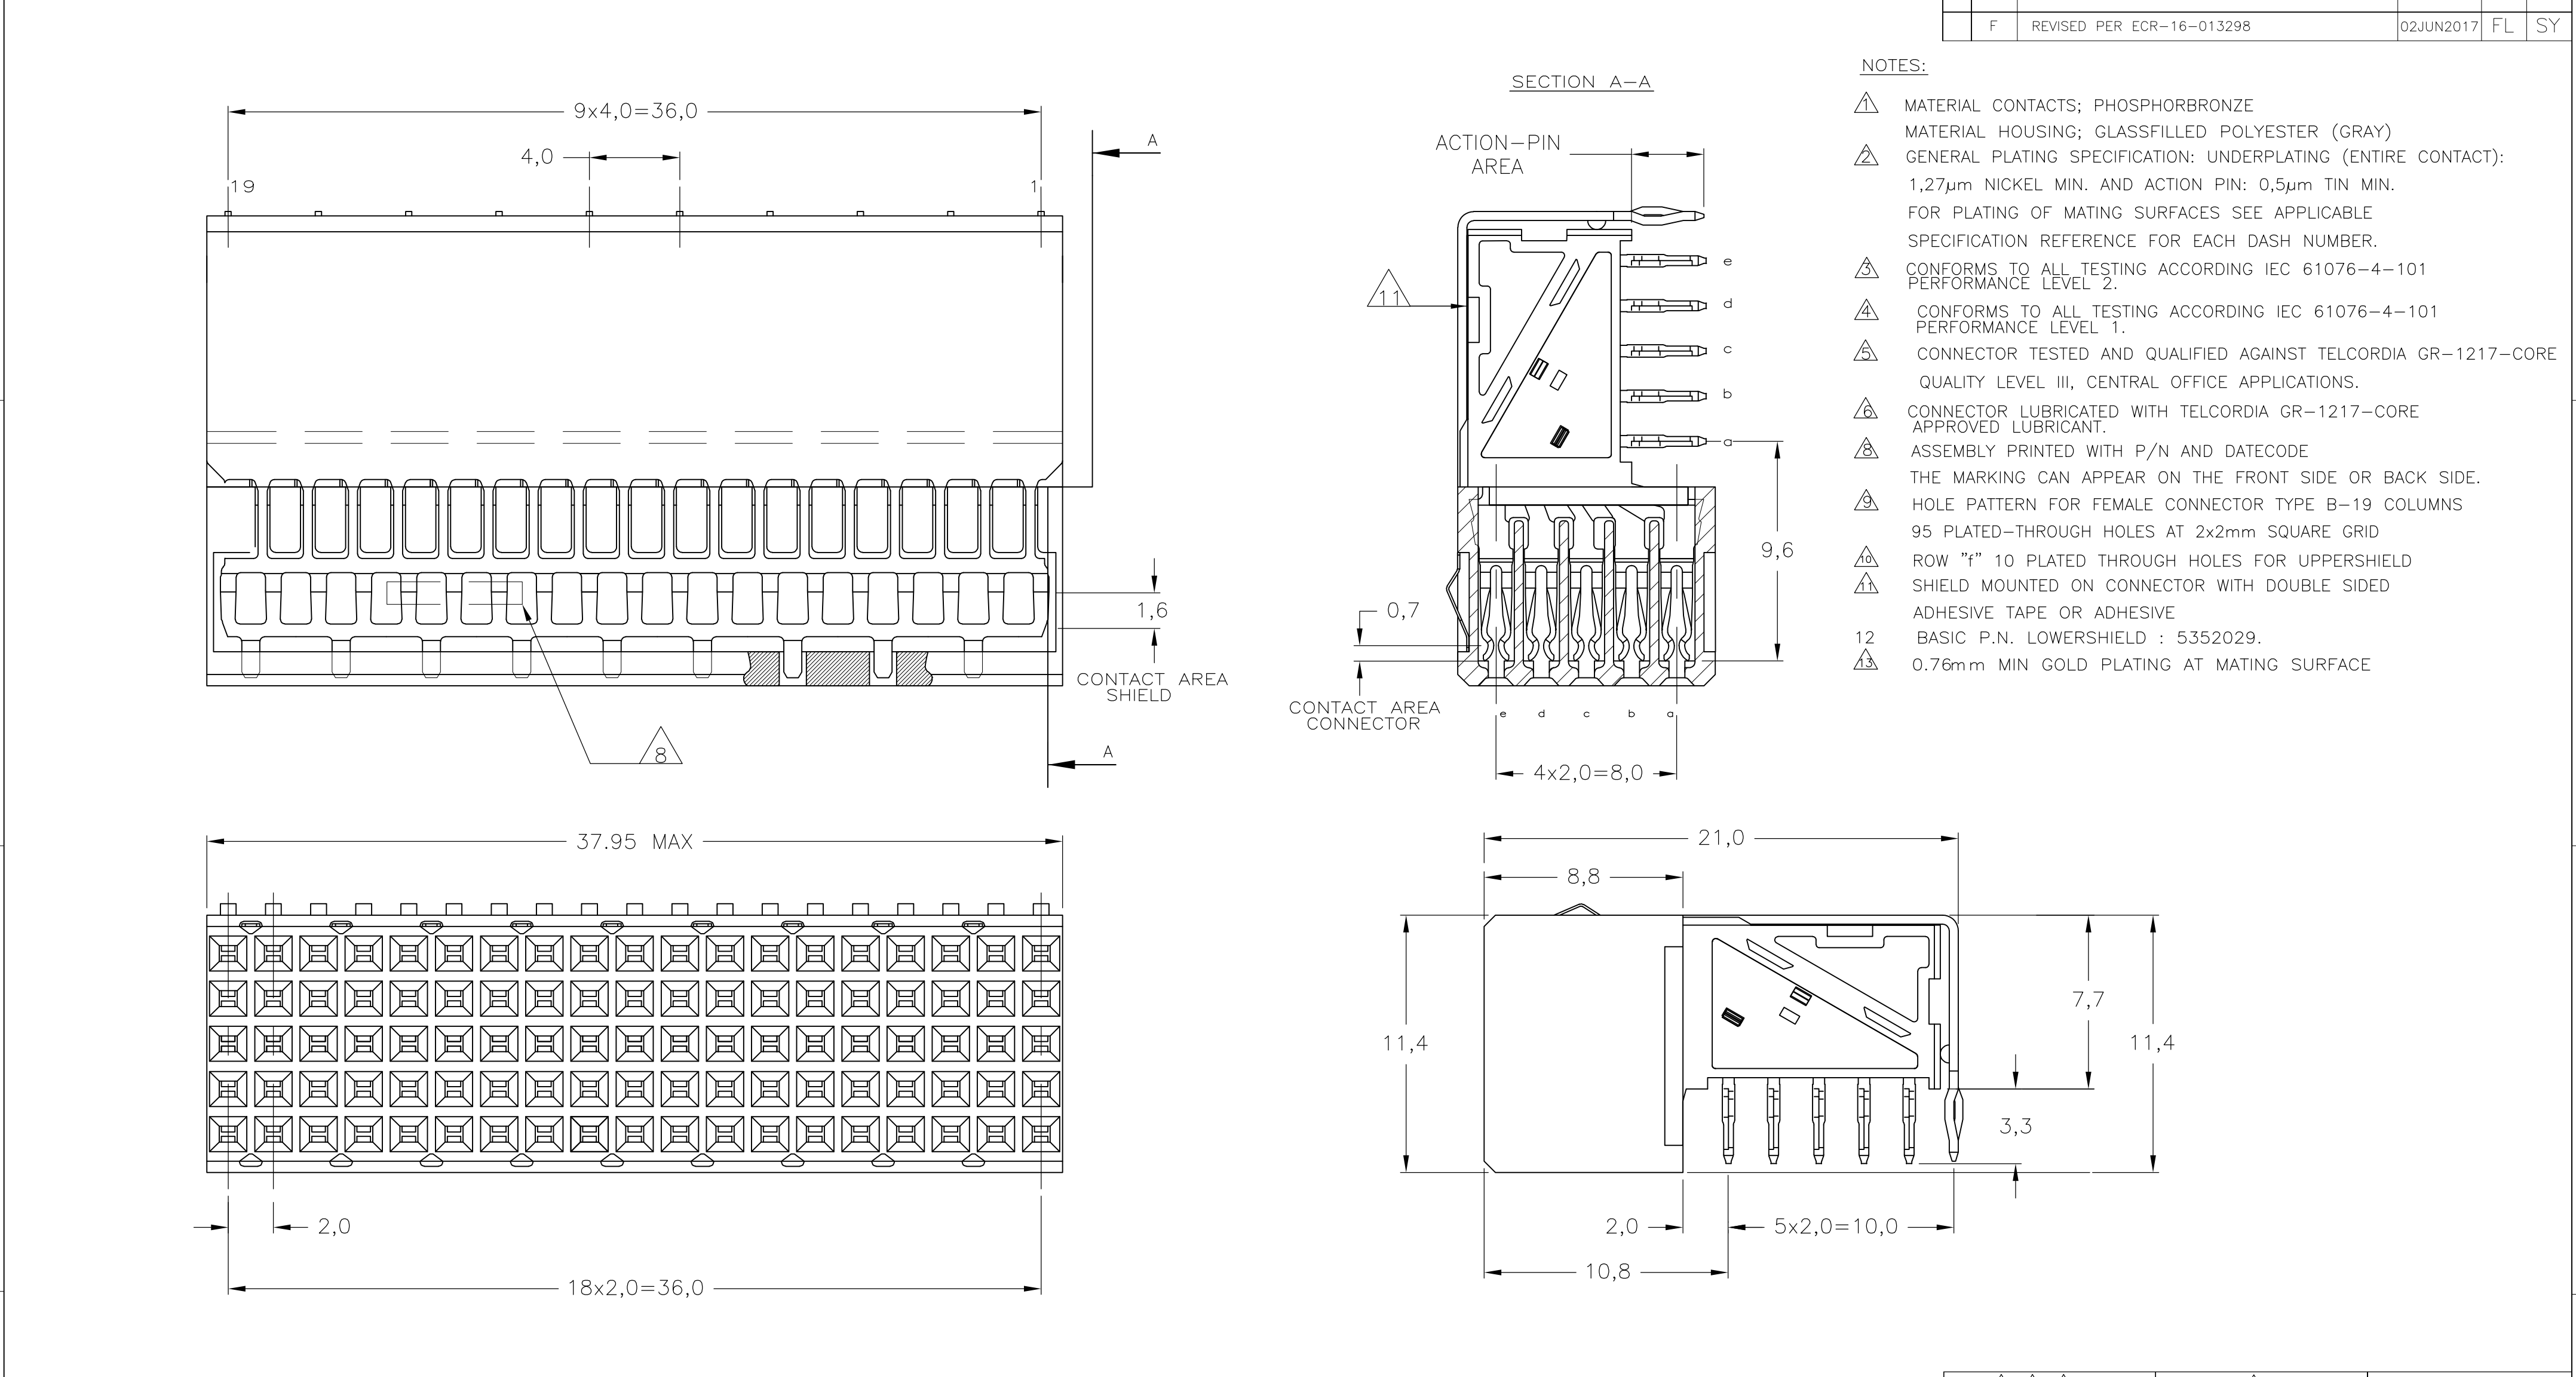

- NOTES:
- △ MATERIAL CONTACTS; PHOSPHORBRONZE
 - △ MATERIAL HOUSING; GLASSFILLED POLYESTER (GRAY)
 - △ GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT): 1,27µm NICKEL MIN. AND ACTION PIN: 0,5µm TIN MIN. FOR PLATING OF MATING SURFACES SEE APPLICABLE SPECIFICATION REFERENCE FOR EACH DASH NUMBER.
 - △ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 2.
 - △ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 1.
 - △ CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL III, CENTRAL OFFICE APPLICATIONS.
 - △ CONNECTOR LUBRICATED WITH TELCORDIA GR-1217-CORE APPROVED LUBRICANT.
 - △ ASSEMBLY PRINTED WITH P/N AND DATECODE
 - △ THE MARKING CAN APPEAR ON THE FRONT SIDE OR BACK SIDE.
 - △ HOLE PATTERN FOR FEMALE CONNECTOR TYPE B-19 COLUMNS
 - △ 95 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID
 - △ ROW "f" 10 PLATED THROUGH HOLES FOR UPERSHIELD
 - △ SHIELD MOUNTED ON CONNECTOR WITH DOUBLE SIDED ADHESIVE TAPE OR ADHESIVE
 - 12 BASIC P.N. LOWERSHIELD : 5352029.
 - △ 0.76mm MIN GOLD PLATING AT MATING SURFACE

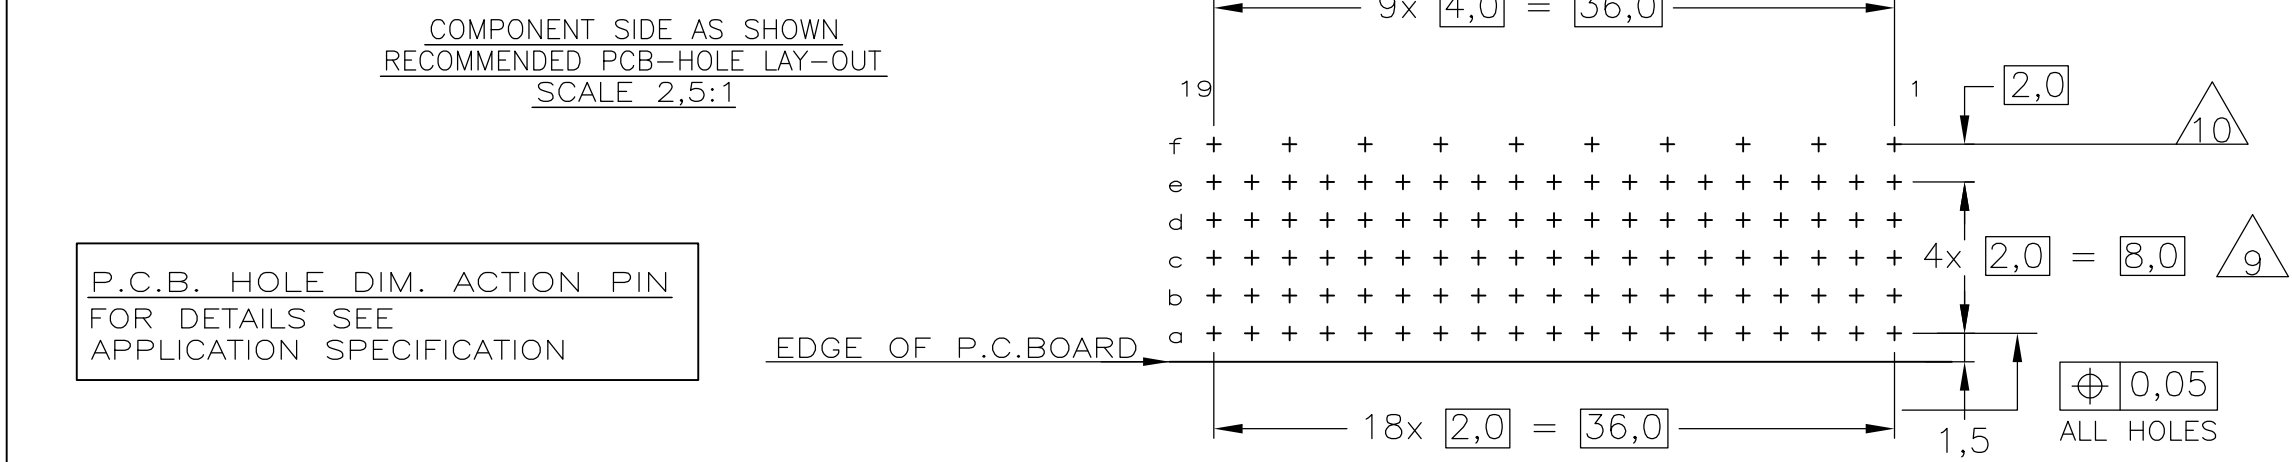

OBSOLETE		2 3 13	1	3-5352171-0
		2 5 6	1	5352171-9
		2 4	1	5352171-4
		2 3	1	5352171-1
		FINISH	MATERIAL	PARTNUMBER
DOCUMENT.		DWN K.N.KIRAN 21AUG2004	TE Connectivity	
UNLESS SPECIFIED:		CHK B.MOOIJ 27OCT2004		
±0.2		APVD B.MOOIJ 27OCT2004	NAME Z-PACK 2mm HM TYPE B - 19 COLUMNS PRE-SHIELDED RECEPTACLE	
		PRODUCT SPEC 108-19082		
		APPLICATION SPEC 114-19029		
		SIZE A2	CAGE CODE 00779	DRAWING NO C-5352171
		WEIGHT 0.000000	RESTRICTED TO —	
CUSTOMER DRAWING			SCALE 5:1	SHEET 1 OF 1
			REV F	