

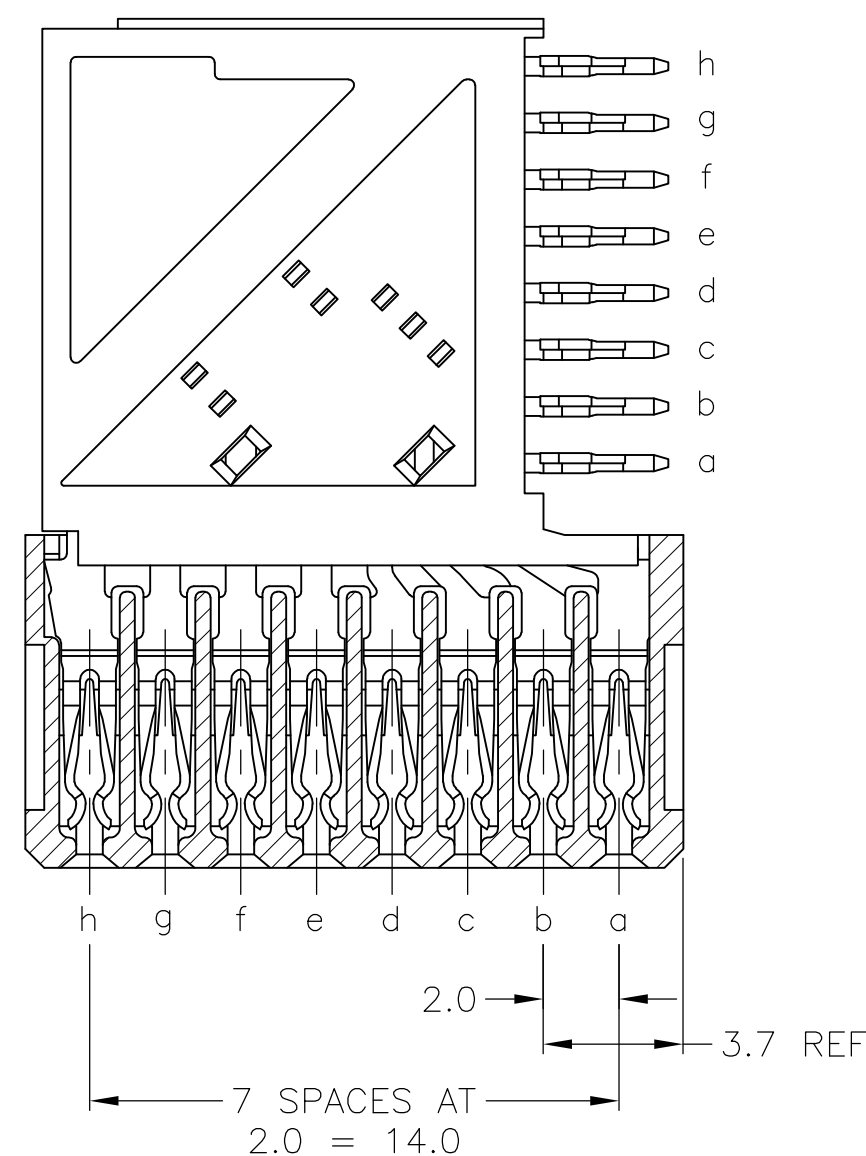
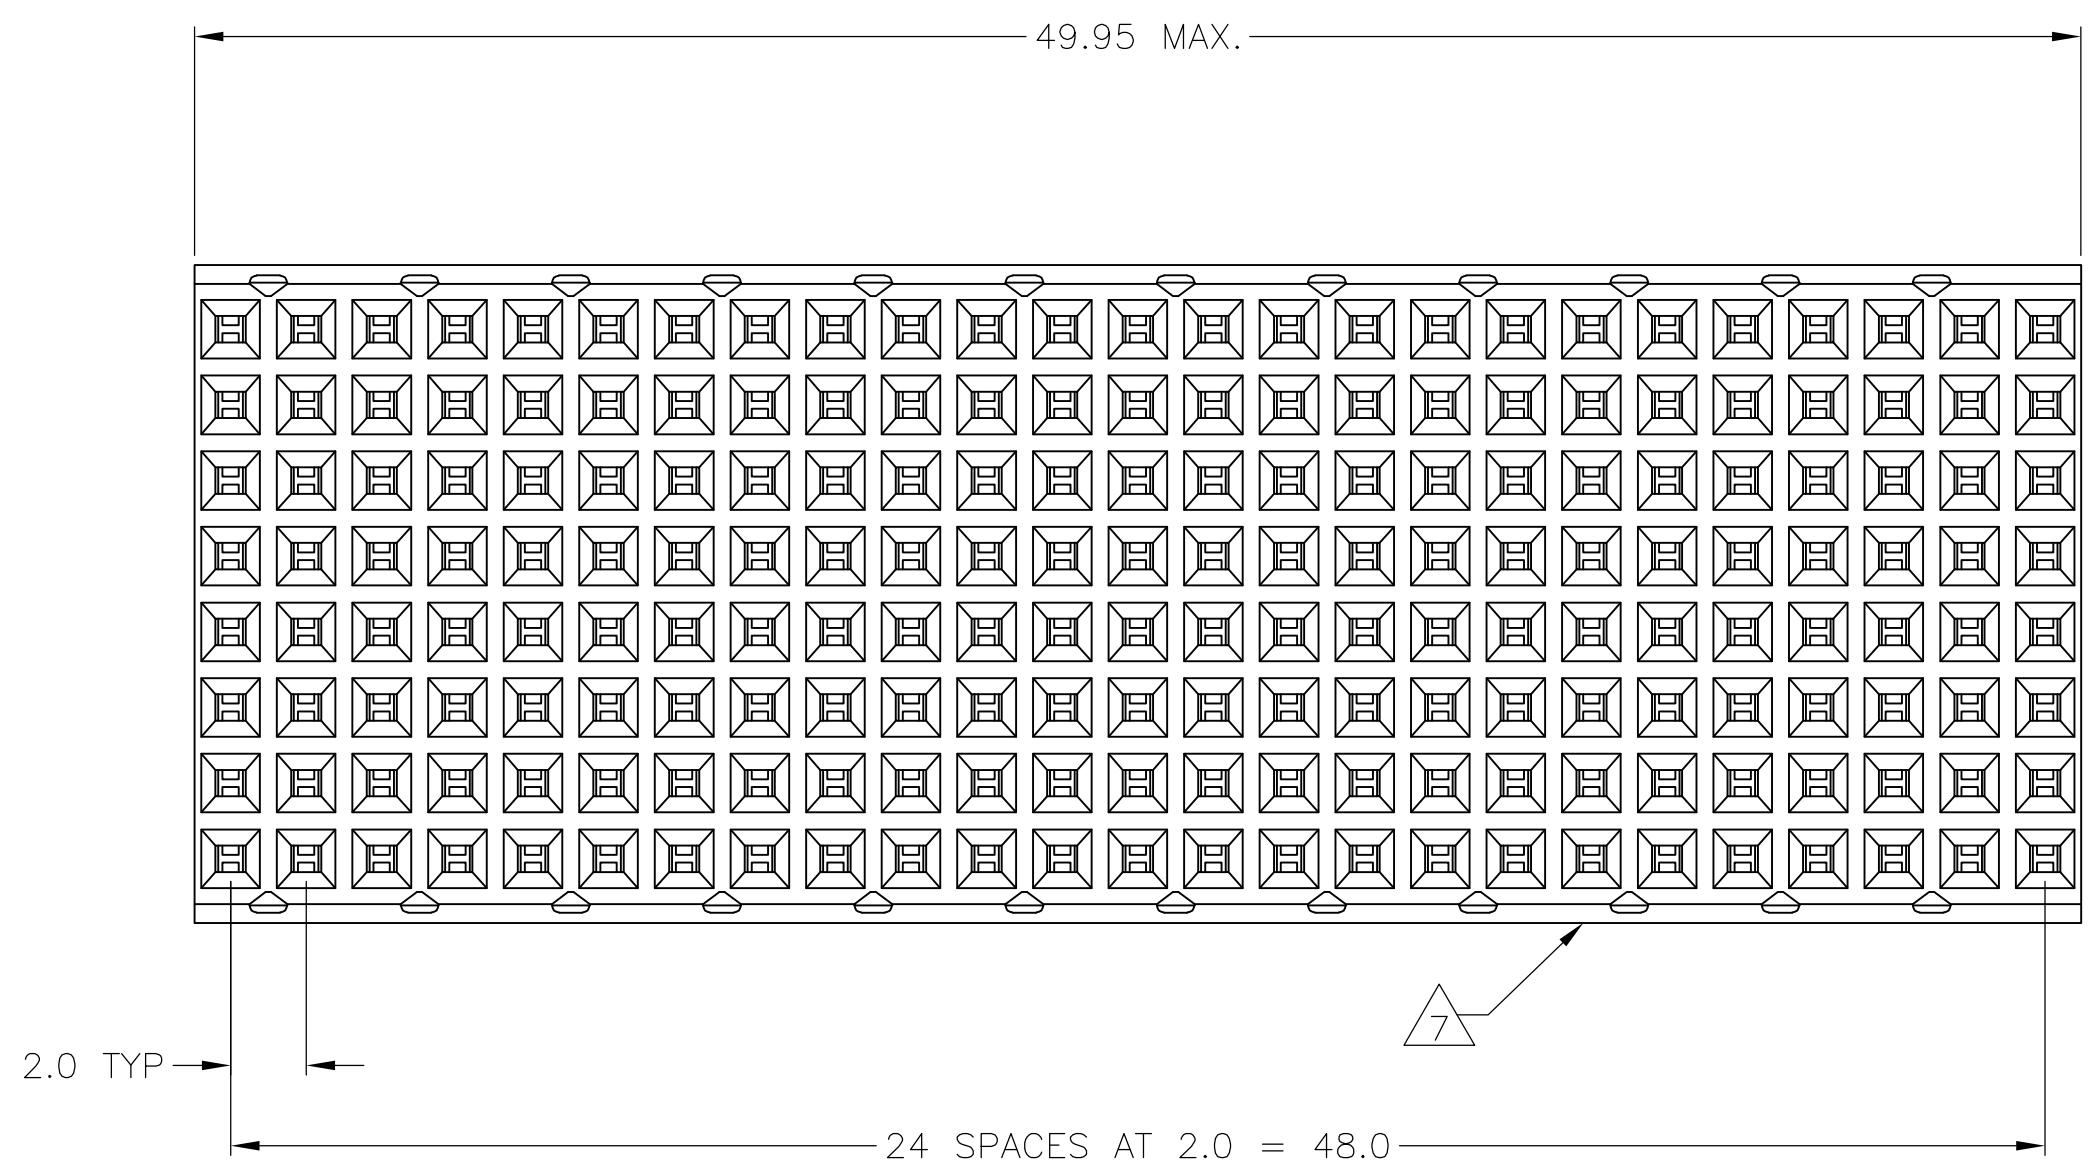


THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION	- , -
© COPYRIGHT - BY -	ALL RIGHTS RESERVED.	

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			E	REVISED PER ECO-12-012363	05JUL2012	SY	AC

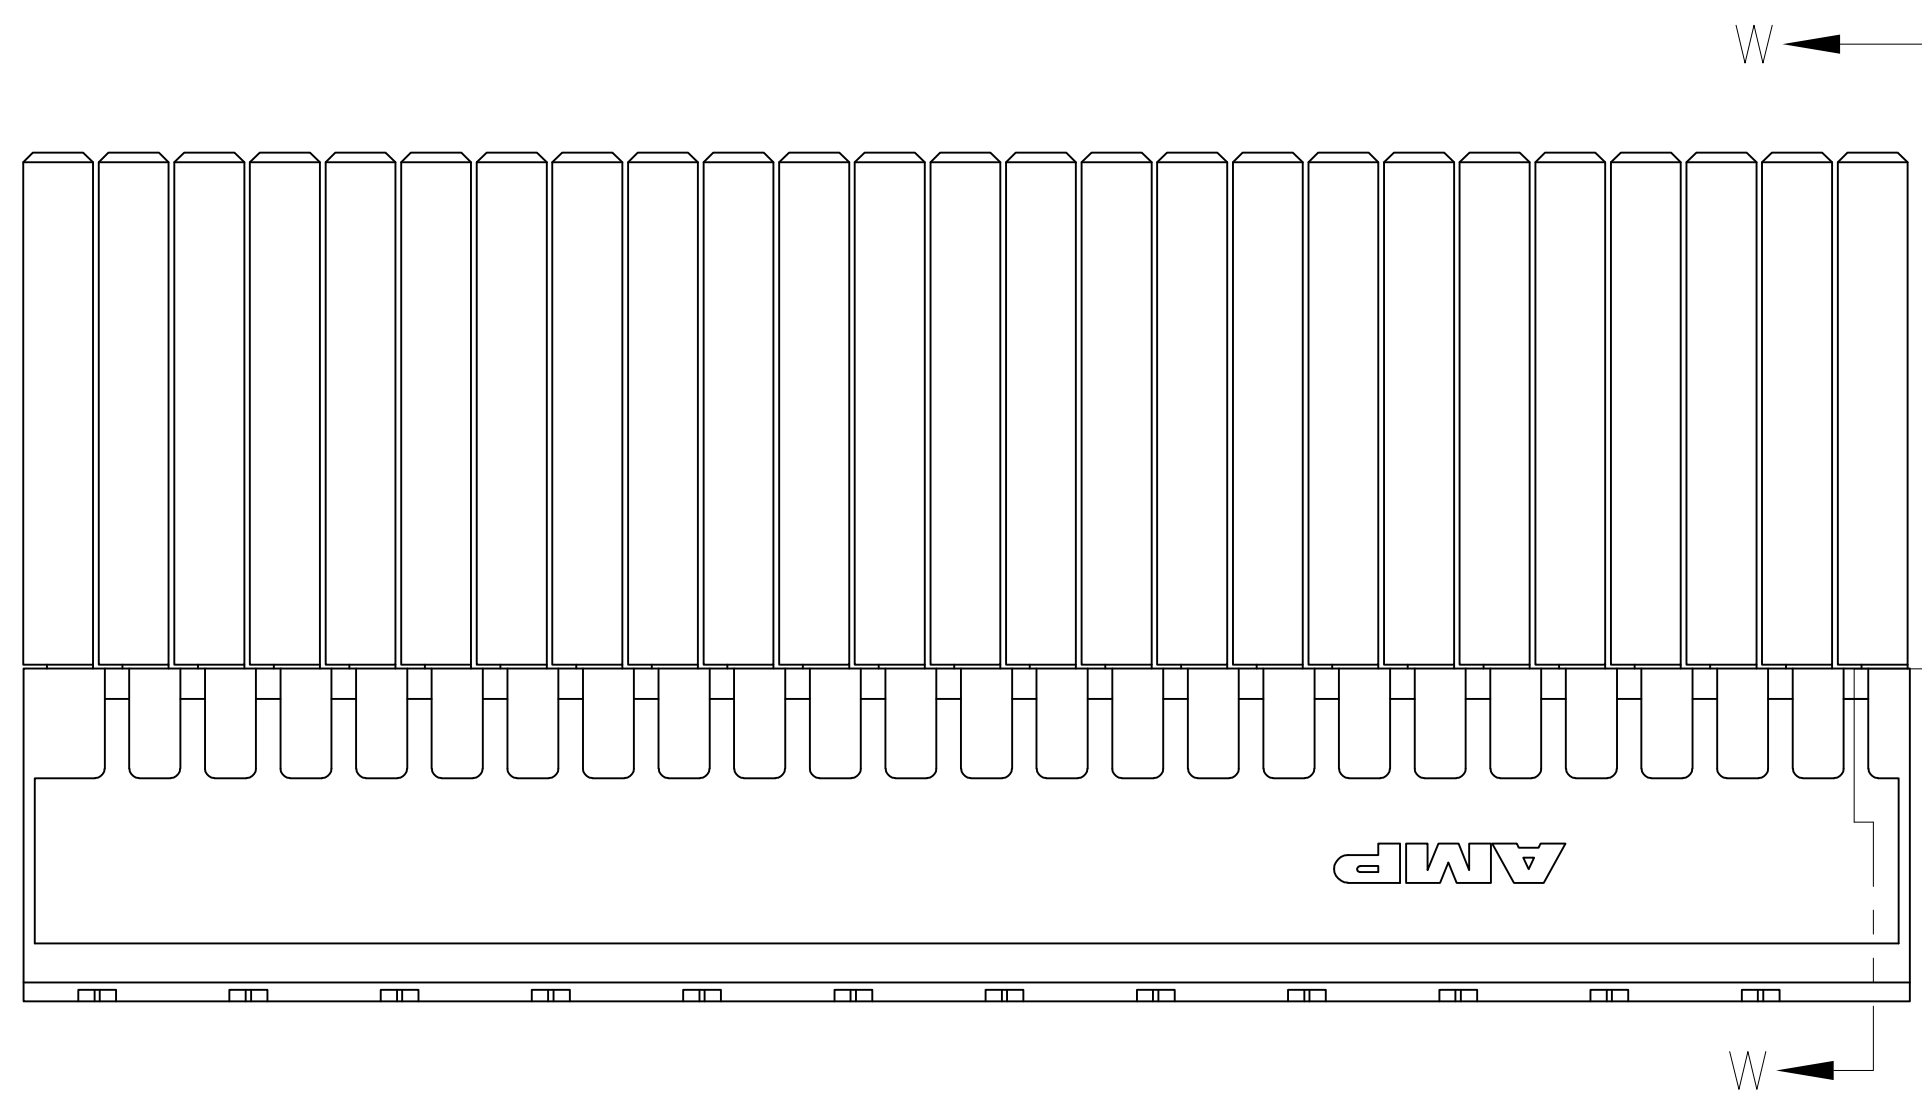


SECTION W-W

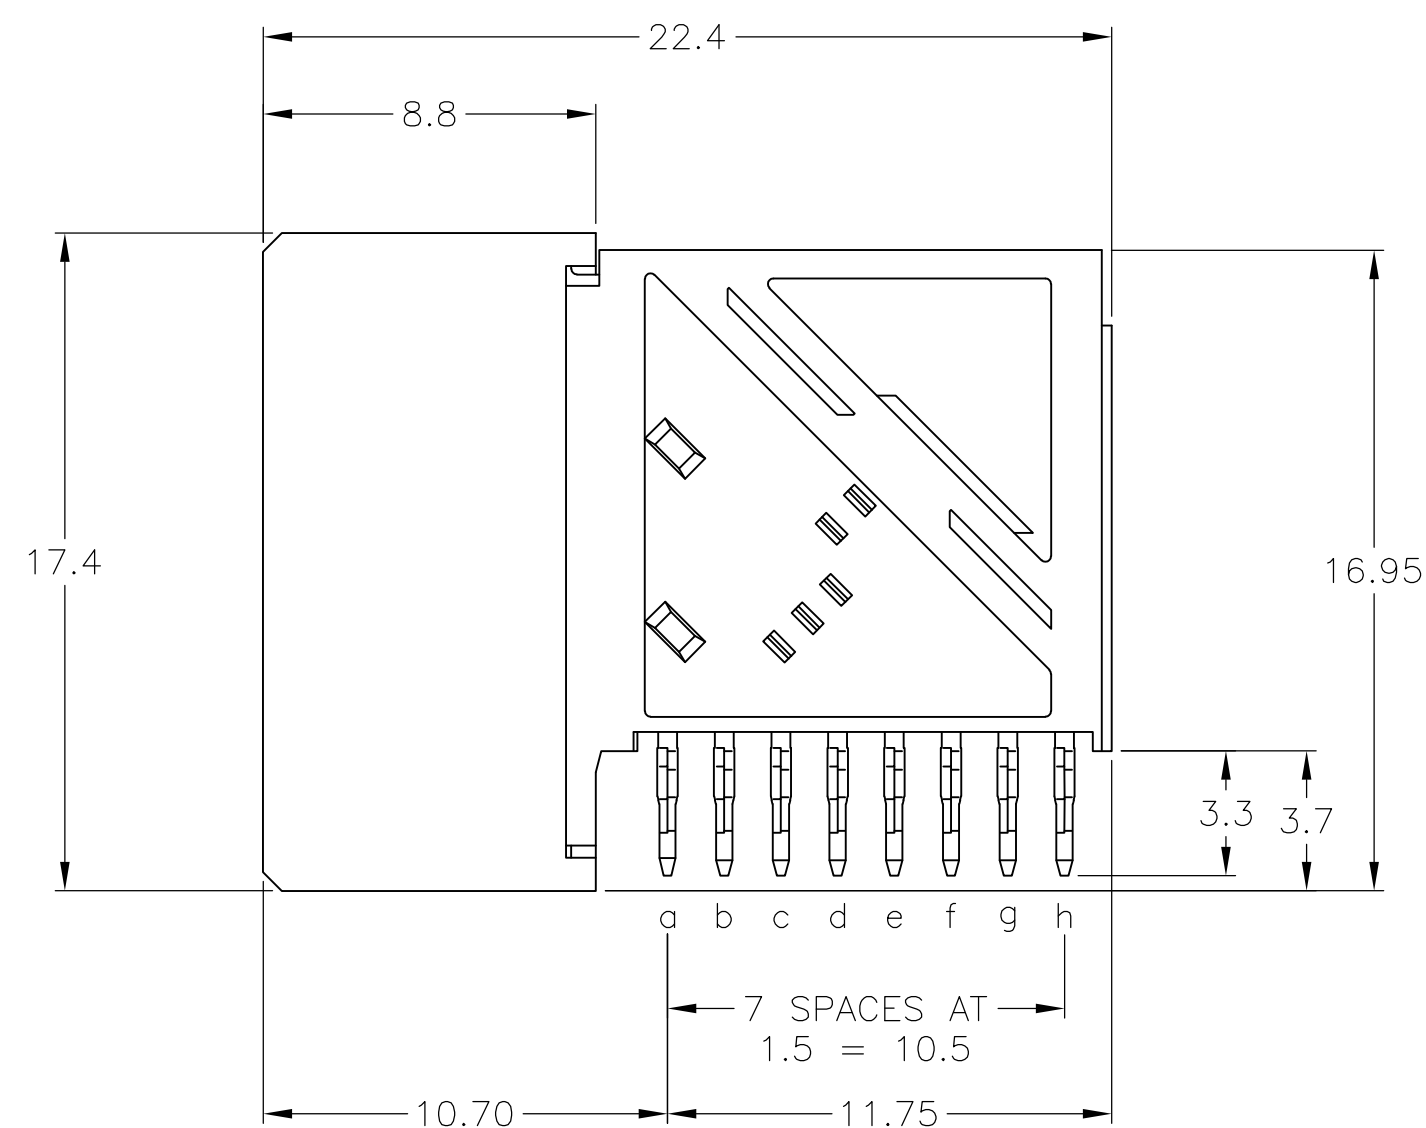

PLATED THRU HOLES PARAMETERS

REFERENCE APPLICATION SPECIFICATION

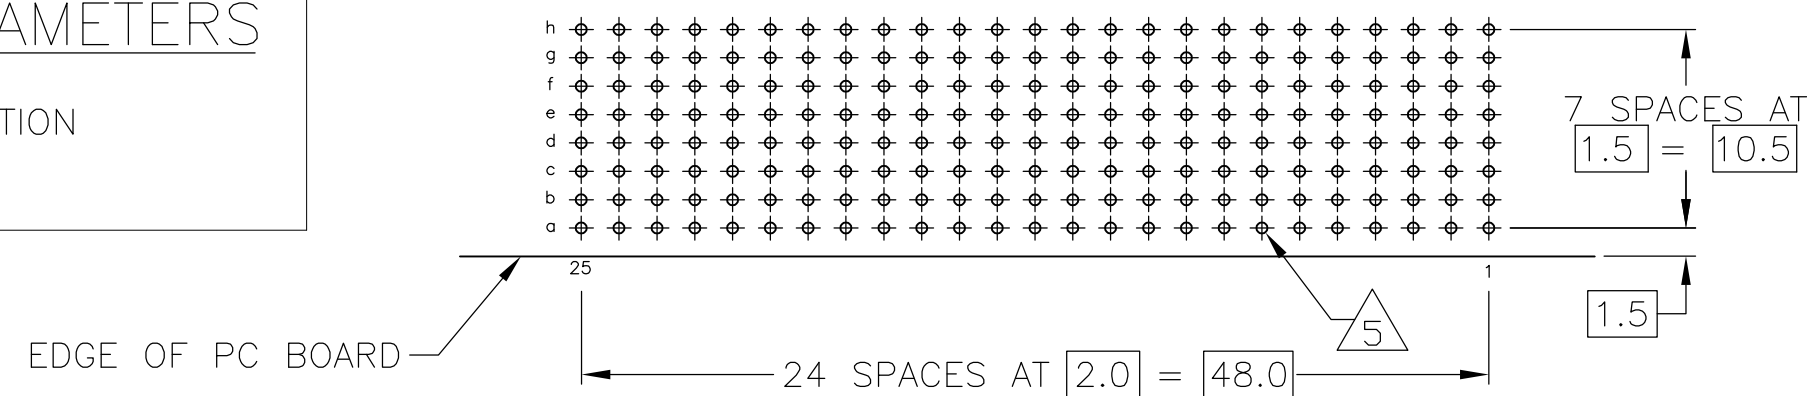

RECOMMENDED PCB-HOLE LAYOUT
COMPONENT SIDE SHOWN

SCALE 2.5:1

- | | |
|---|--|
| 1 | MATERIAL:
CONTACT: PHOSPHOR BRONZE.
HOUSING: GLASS-FILLED POLYESTER. |
| 2 | GENERAL PLATING SPECIFICATION: UNDERPLATING
(ENTIRE CONTACT): 1.27 μ m MIN NICKEL AND ACTION
PIN: 0.5 μ m MIN TIN.
FOR PLATING OF MATING SURFACES SEE APPLICABLE
SPECIFICATION REFERENCE FOR EACH DASH NUMBER. |
| 3 | CONFORMS TO ALL TESTING ACCORDING TO IEC 61076-4-101
PERFORMANCE LEVEL 2. |
| 4 | CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL 3,
CENTRAL OFFICE APPLICATIONS. |
| 5 | PLATED THROUGH HOLES AT 2x1.5mm GRID. 200 TOTAL HOLES. |
| 6 | CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT.
TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995. |
| 7 | CONNECTOR PRINTED WITH PART NUMBER AND DATE CODE THIS SIDE.
ADDITIONAL CHARACTERS OR MARKINGS, AS WELL AS THE
LOCATION OF THE MARKINGS, MAY BE ADDED FOR TRACEABILITY BASED
UPON MANUFACTURERS DISCRETION. |
| 8 | 0.76 μ m MIN GOLD PLATING AT MATING SURFACE. |
- THIS DRAWING IS A CONT

			3-5646445-0
			5646445-9
			5646445-1
FINISH			PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN G.CARBO	08DEC04	 TE Connectivity
		CHK G.SKIPPER	08DEC04	
DIMENSIONS: mm	TOLERANCES, UNLESS OTHERWISE SPECIFIED: 0-PLG $\pm$ 1-PLG ± 0.1 2-PLG ± 0.05 @ 0.2 4-PLG $\pm$ ANGLES $\pm$ FINISH	APPD G.SKIPPER	08DEC04	NAME RECEPTACLE ASSEMBLY, 200 POSITION, TYPE E, 8 ROW, w/TWISTED TULIP CONTACTS, Z-PACK 2mm HH
		PRODUCT SPEC APPLICATION SPEC		
MATERIAL  SEE TABLE		WEIGHT	—	SIZE CASE CODE DRAWING NO A1 00779 C=5646445
		CUSTOMER DRAWING		
		SCALE	5:1	SHEET 1 of 1 REV F