

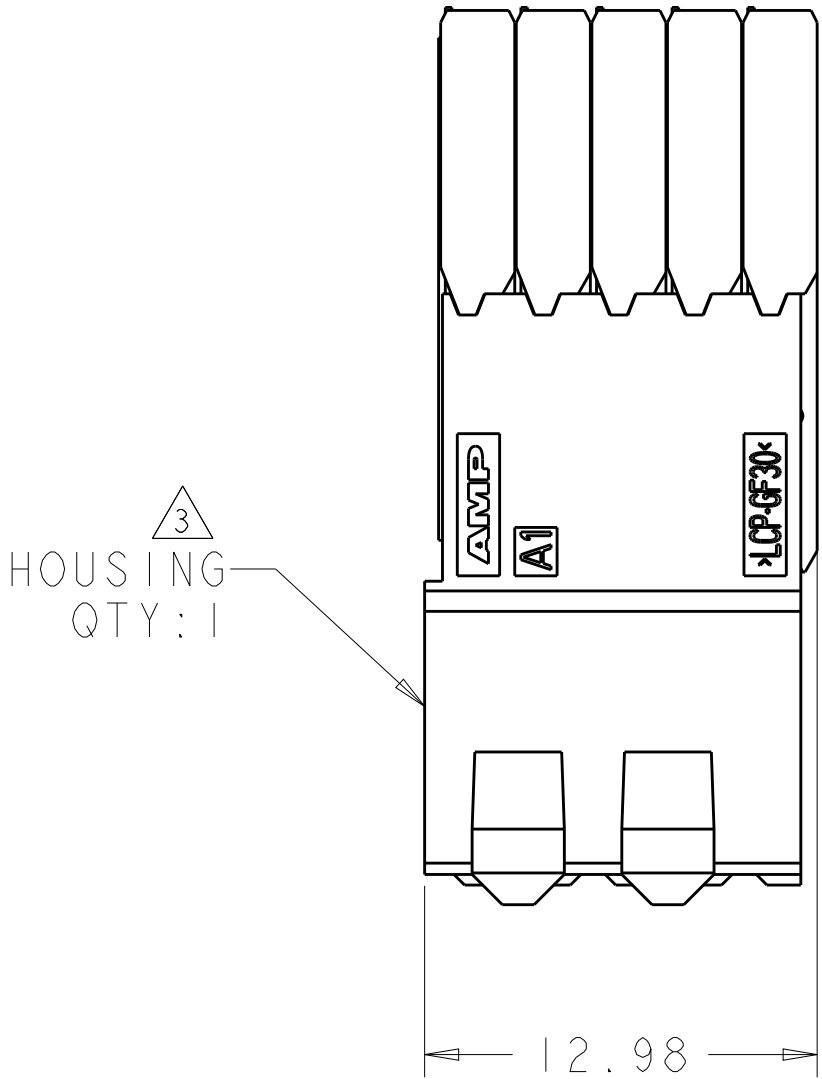
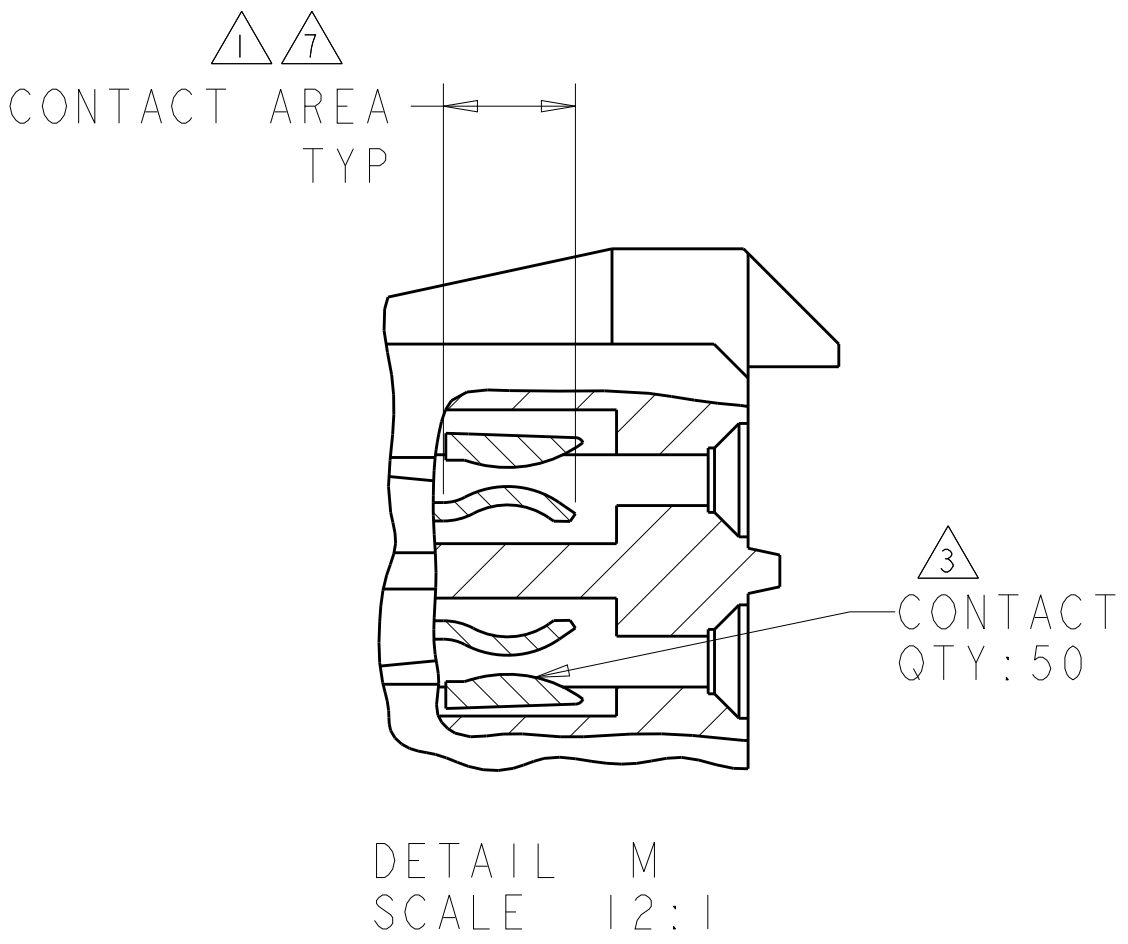
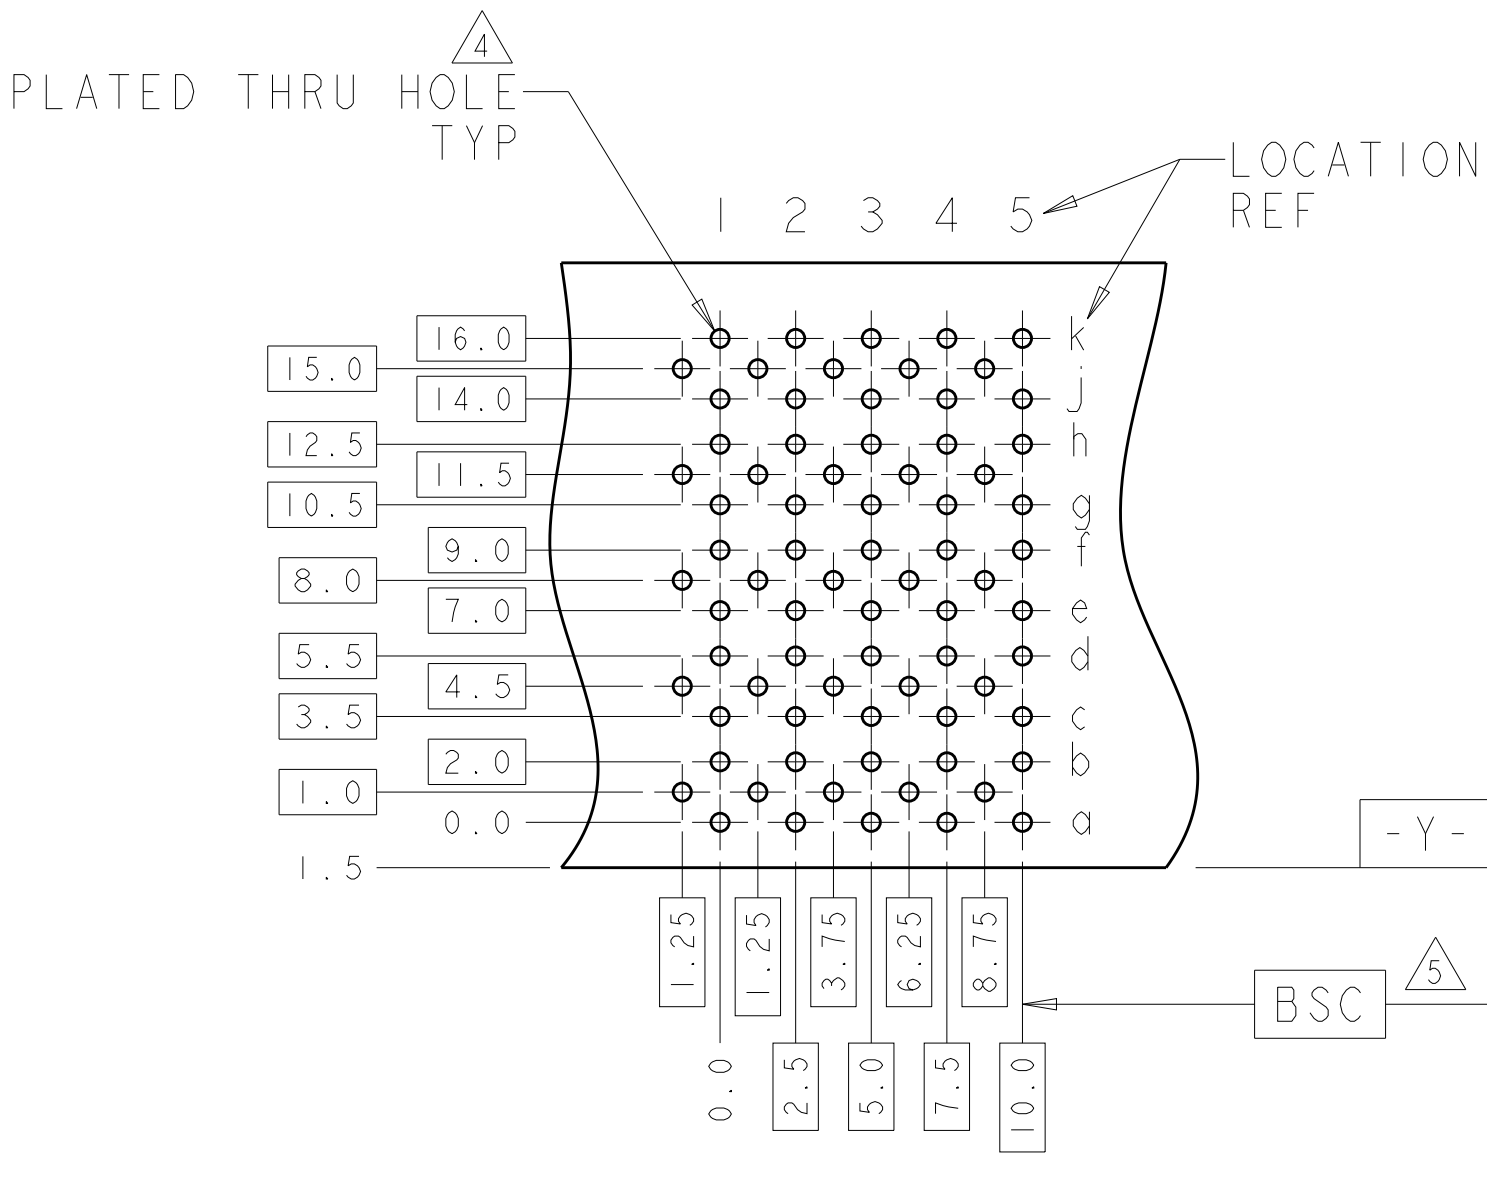



LOC		DIST		REVISIONS				
P	LTR	DESCRIPTION			DATE	DWN	APVD	
	B	REVISED PER ECO-18-020072			25DEC2018	R.L	H.L	

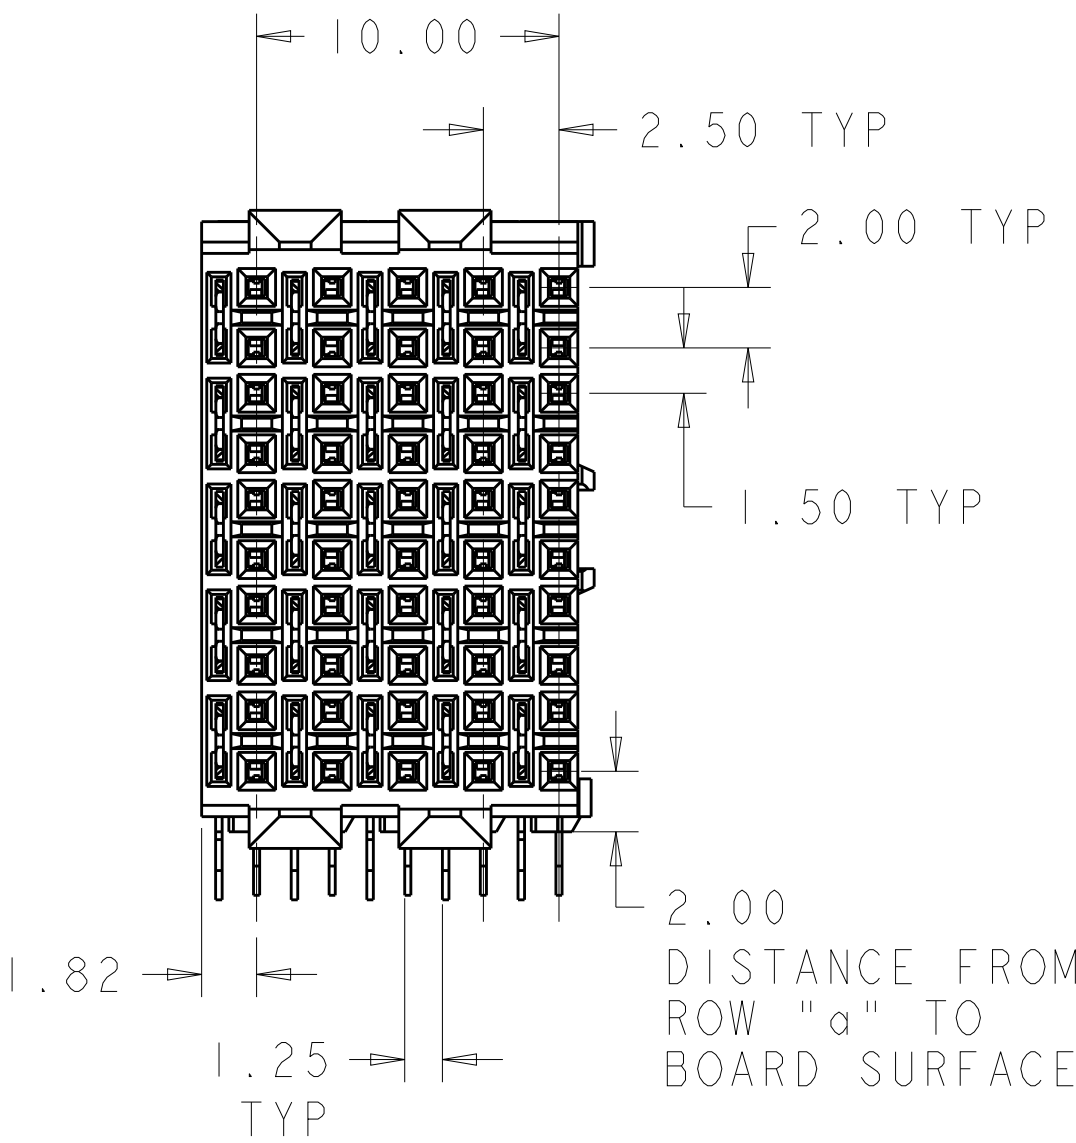


- CONTACT MATING AREA MEETS THE PERFORMANCE REQUIREMENTS OF TE CONNECTIVITY PRODUCT SPECIFICATION 108-1957; BASED ON TELCORDIA GR-1217-CORE, APPLICATIONS IN UNCONTROLLED ENVIRONMENTS.
- 0.76µm MIN TIN OVER 1.27µm MIN NICKEL
- MATERIAL: CONTACT - COPPER ALLOY
SHIELD - PHOSPHOR BRONZE
HOUSING - LCP, UL94V-0
CHICKLET - GLASS FILLED POLYESTER
- REFERENCE APPLICATION SPEC 114-13020 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESS.
- DATUM AND BASIC DIMENSION ESTABLISHED BY CUSTOMER.
- SEATING HEIGHT TO BOARD SURFACE.
- CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995.
- DATE CODE
- PART NUMBER

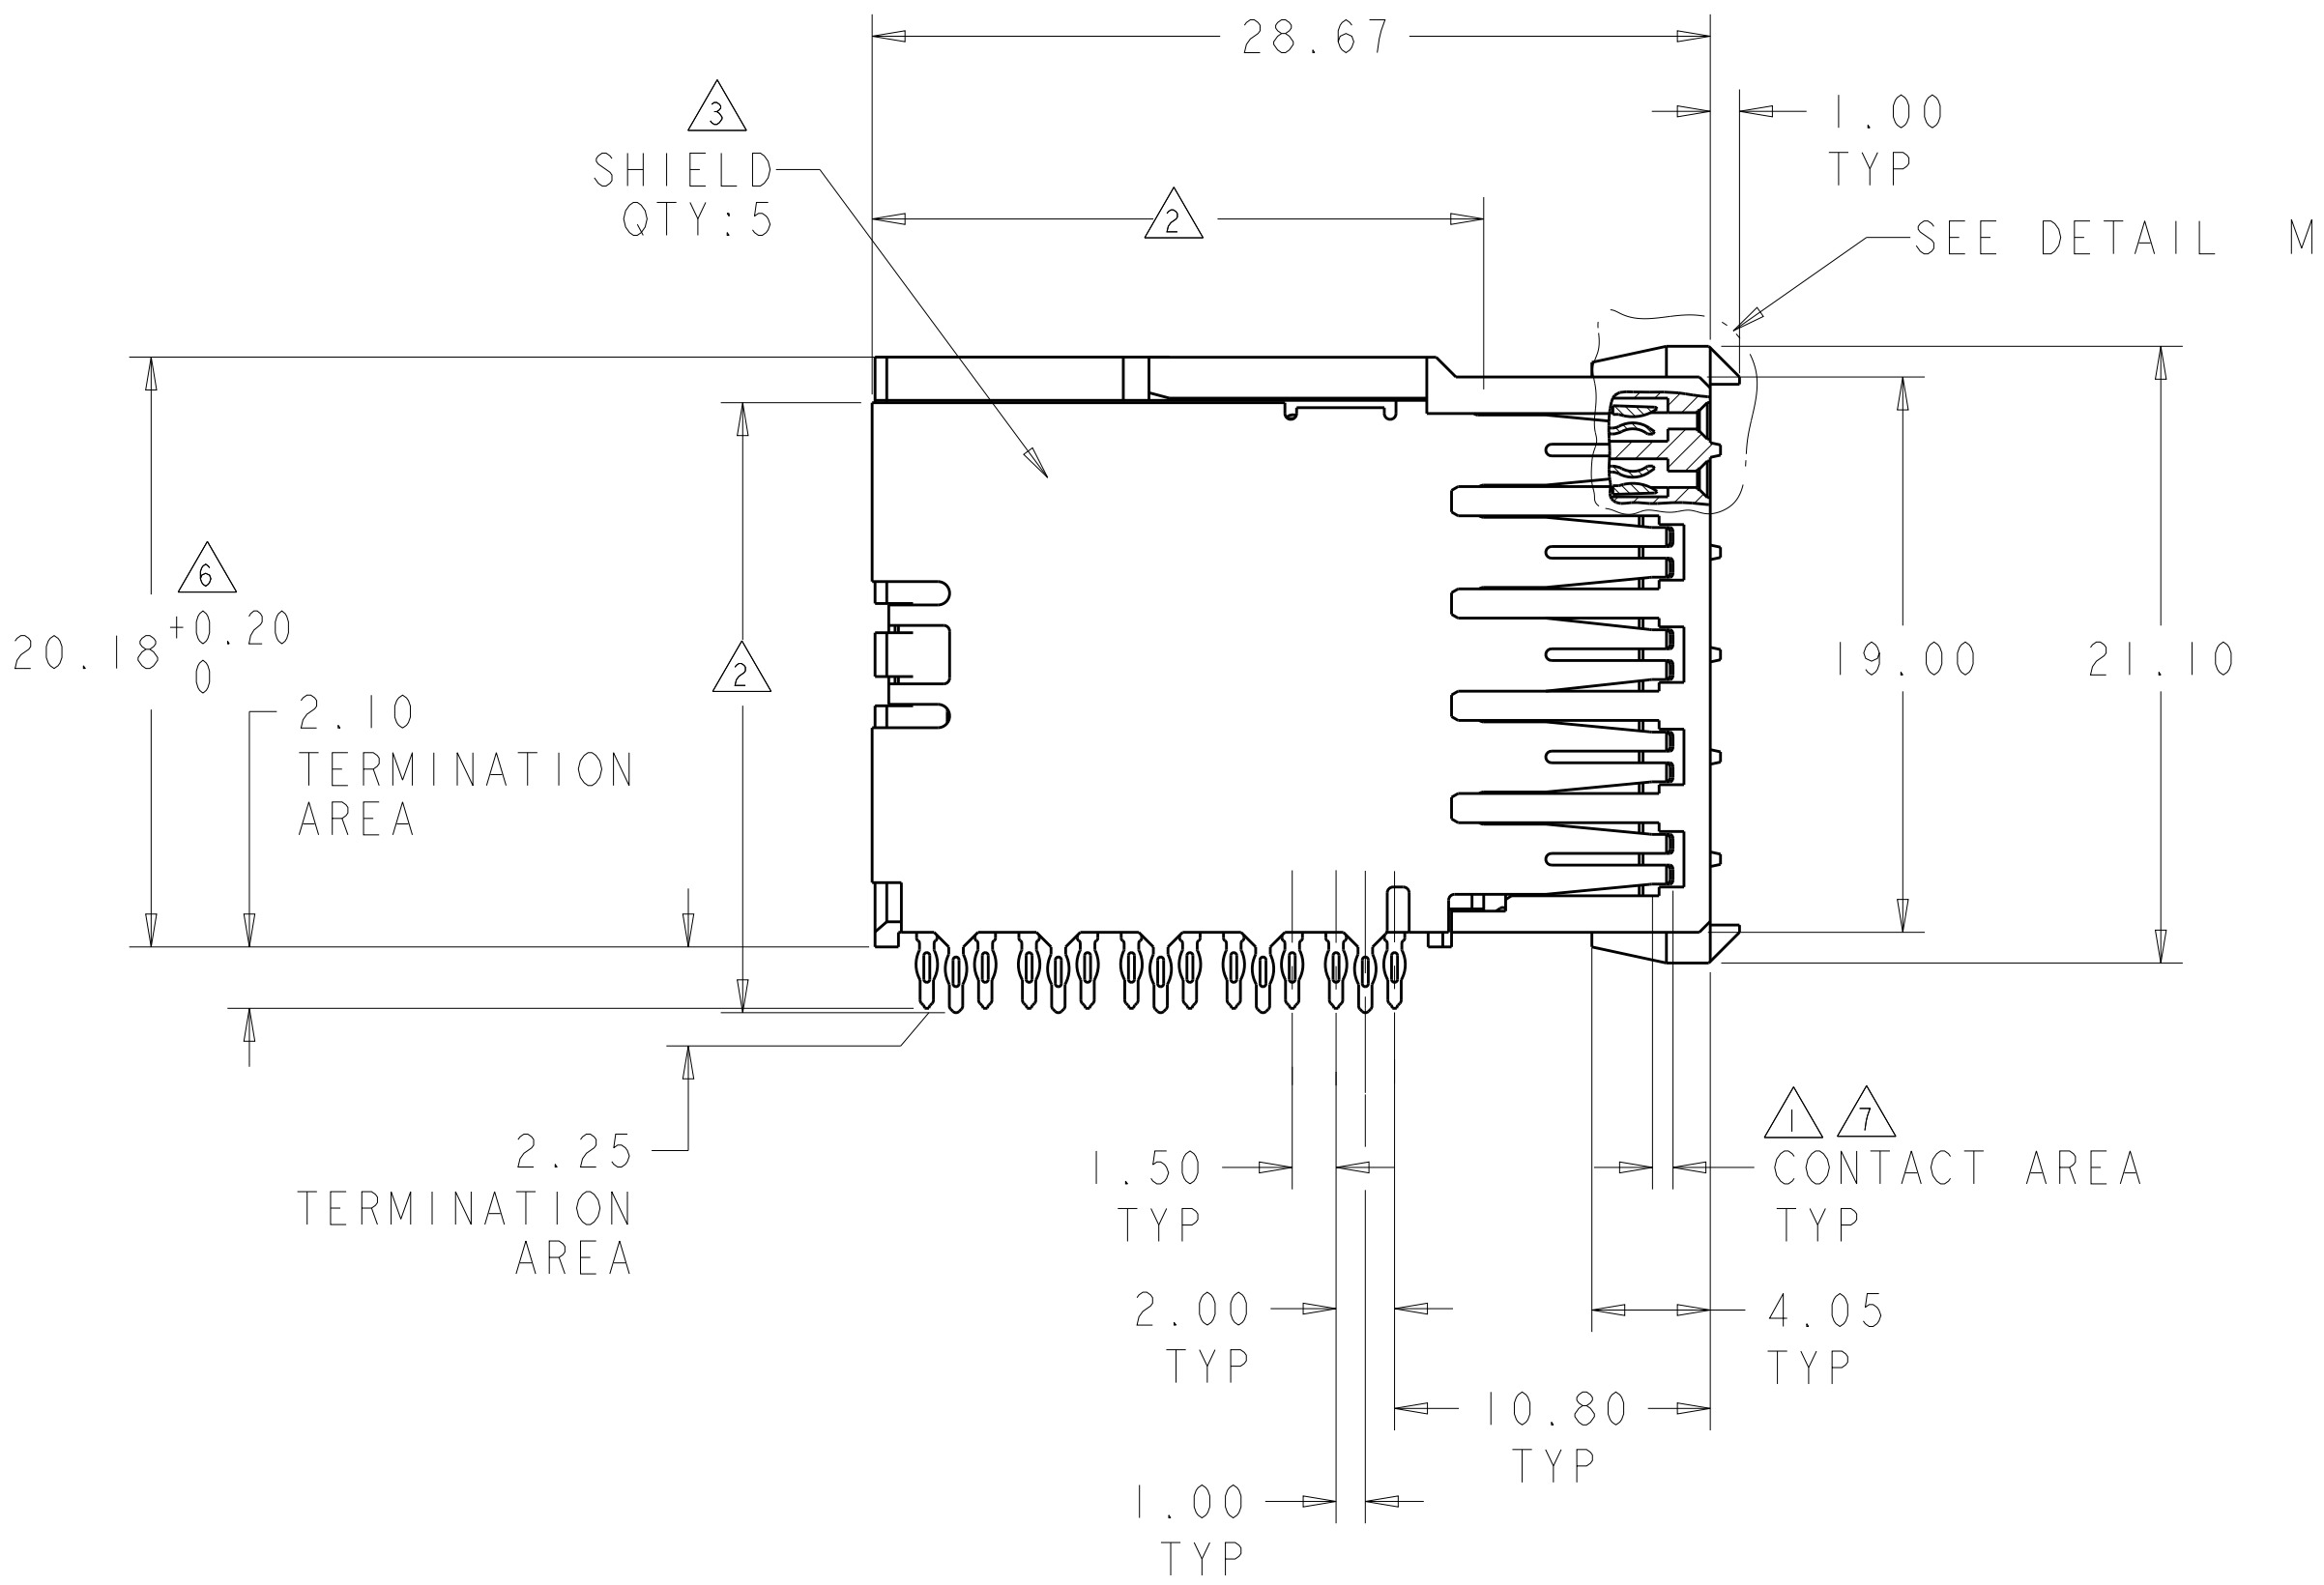

RECOMMENDED PRINTED
CIRCUIT BOARD LAYOUT
COMPONENT SIDE OF PRINTED CIRCUIT BOARD

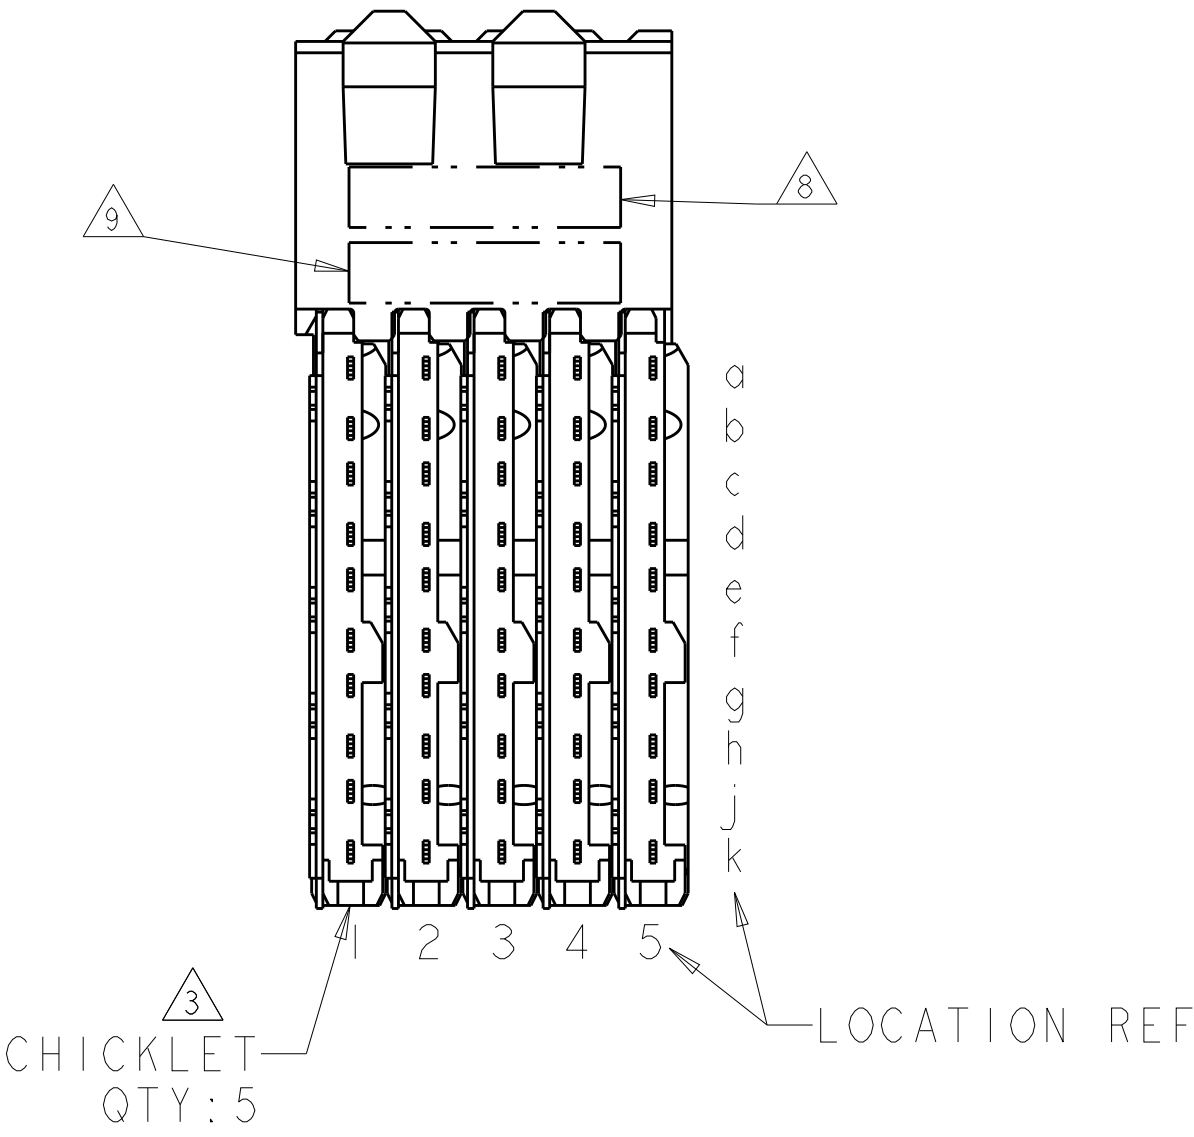

5120791-1
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. CARBO 08DEC04	 TE Connectivity				
DIMENSIONS:		CHK R. PATTERSON 08DEC04					
mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME RECEPTACLE ASSEMBLY, 50 POSITION 10 ROW, DUAL BEAM, Z-PACK HS3			
		APVD R. PATTERSON 08DEC04					
		PRODUCT SPEC 108-1957		SIZE CASE CODE DRAWING NO A100779C=5120791			
		APPLICATION SPEC 114-13020			RESTRICTED TO		
		0 PLC ±.2 1 PLC ±0.13 2 PLC ±0.13 3 PLC ±0.05 4 PLC ±.2		WEIGHT -			
		ANGLES ° ±1					
MATERIAL	FINISH 3	SOLDER TAIL CONTACT 2		SCALE 4:1	SHEET 1	OF 1	REV B
		CUSTOMER DRAWING					