
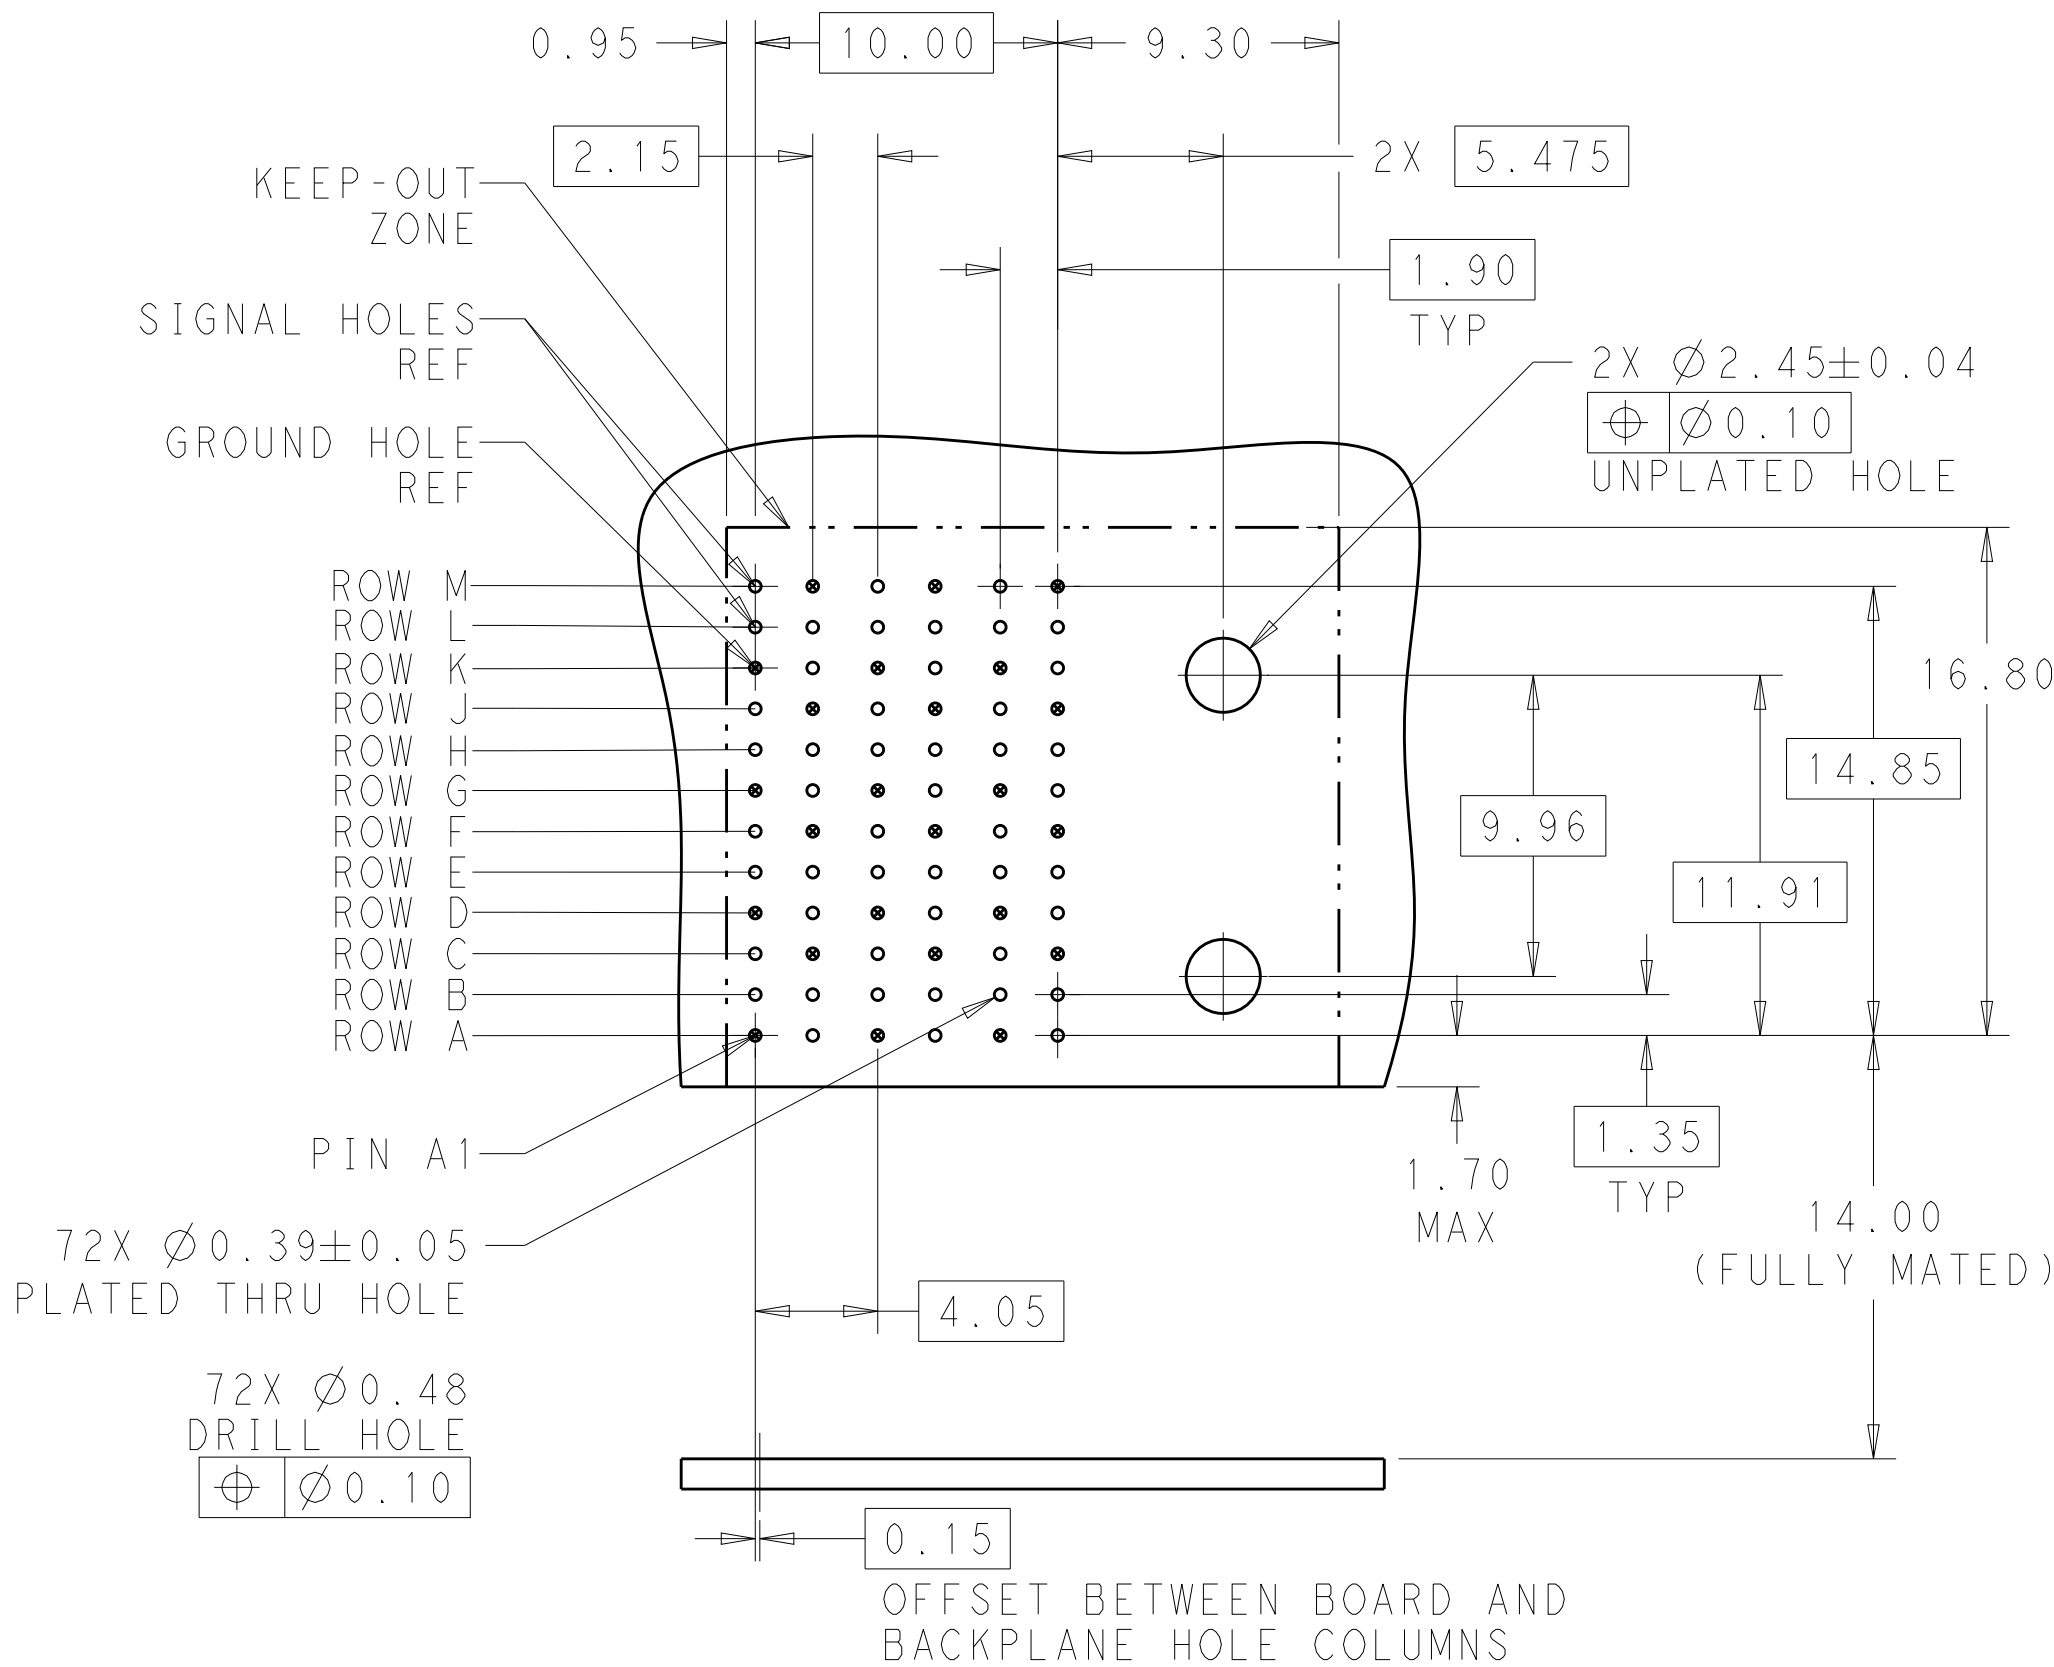
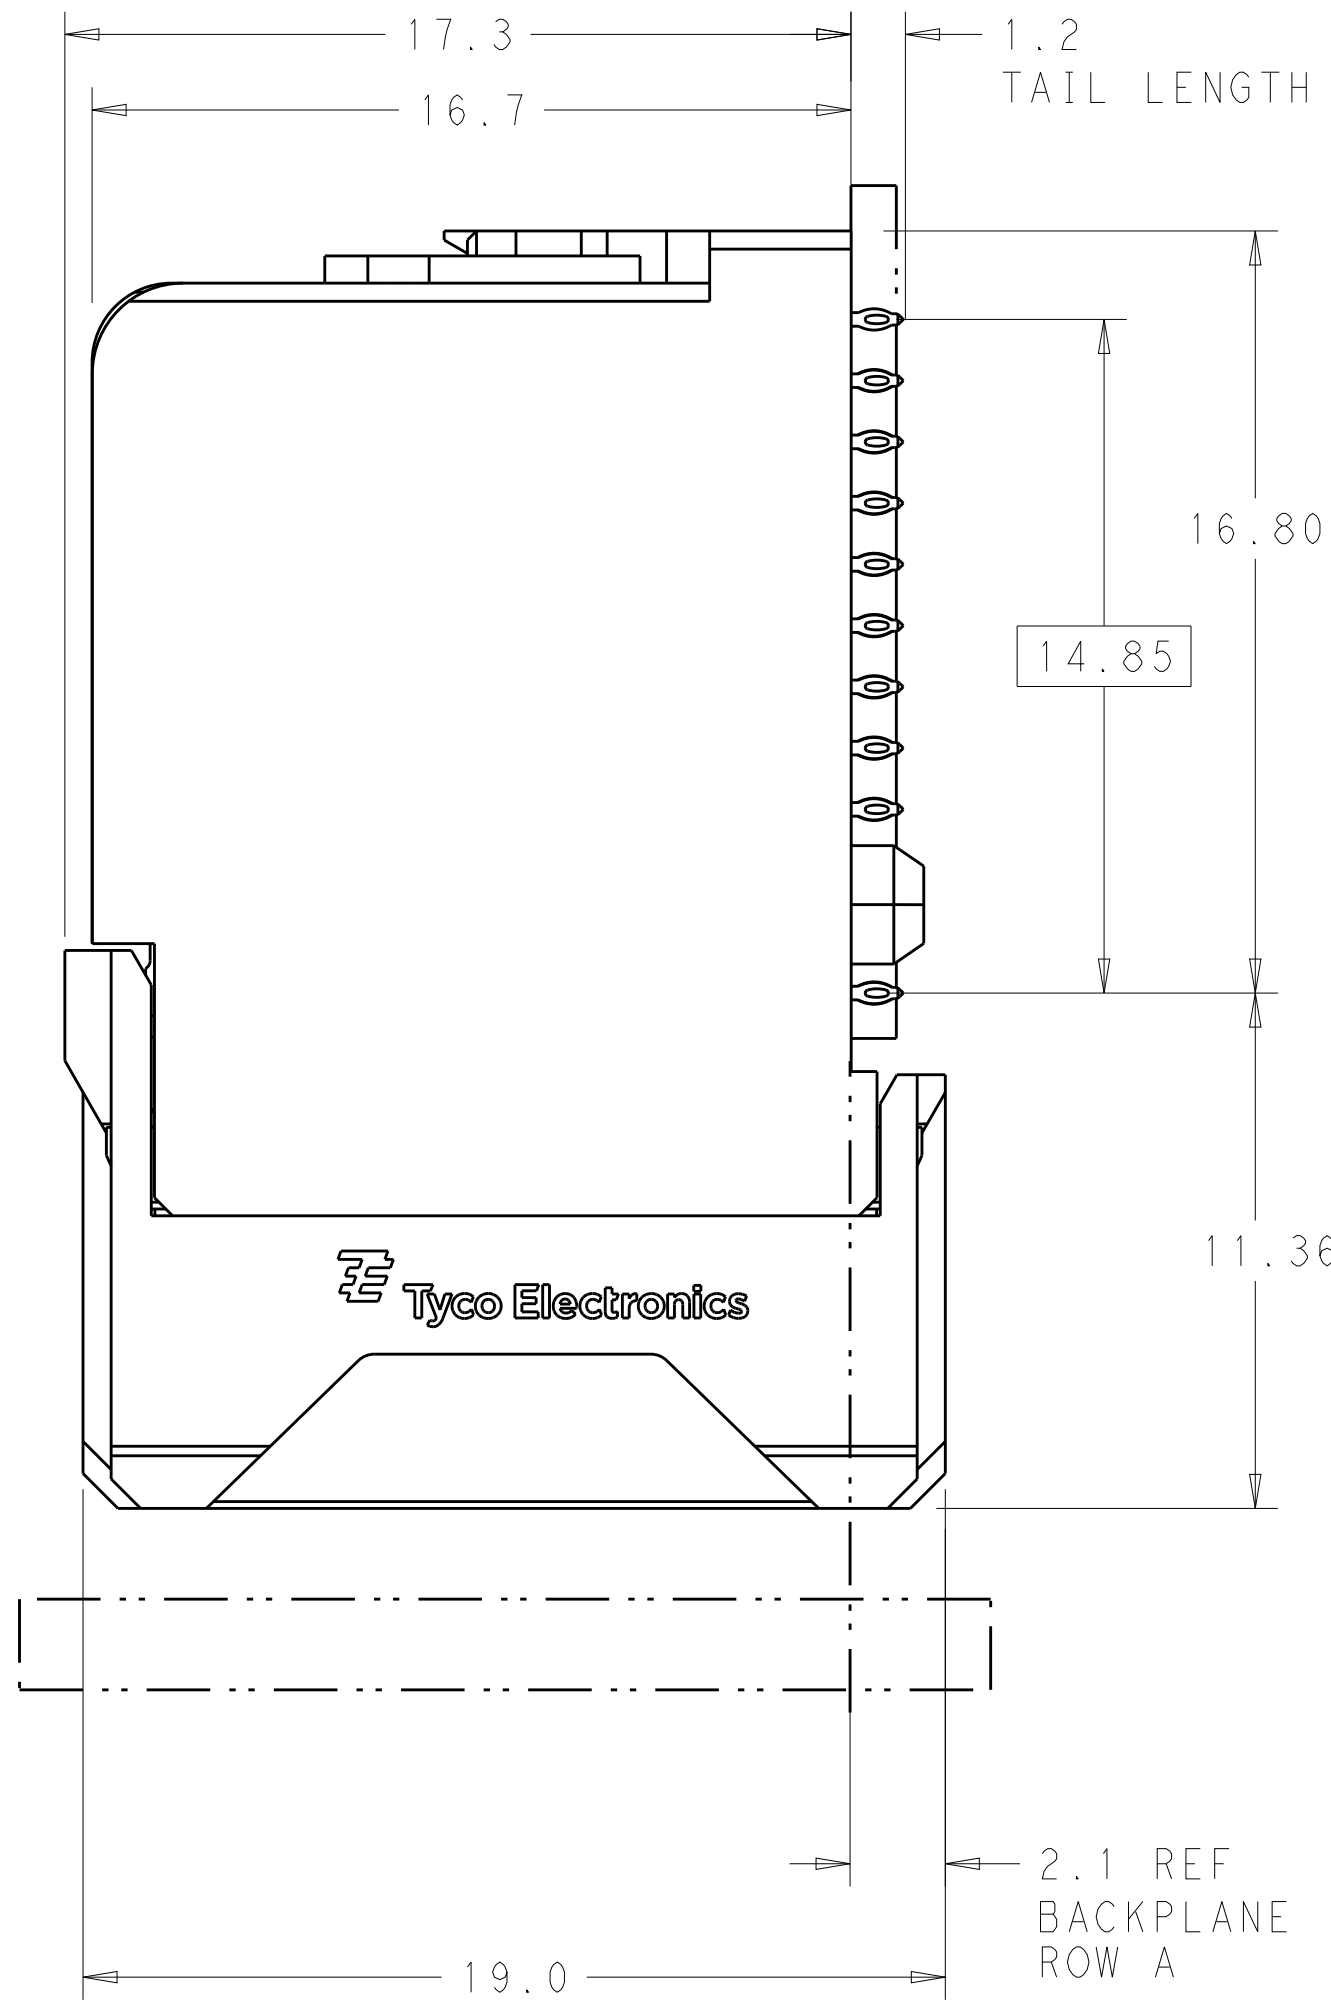
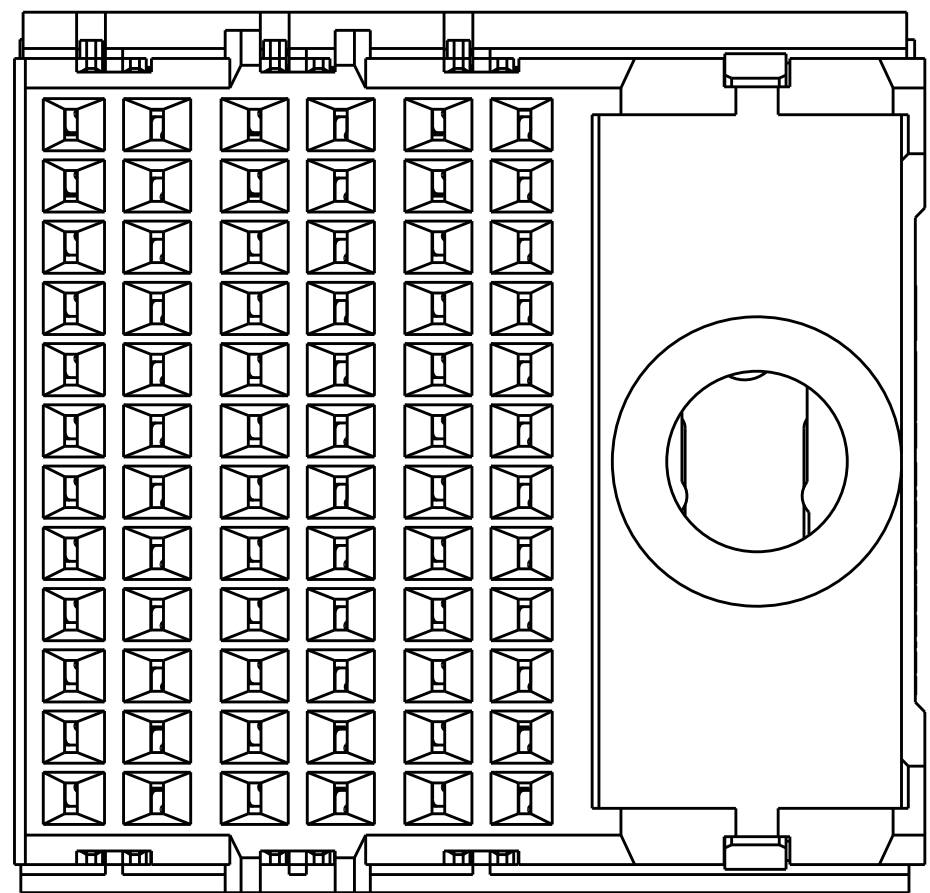


D

C


B

A

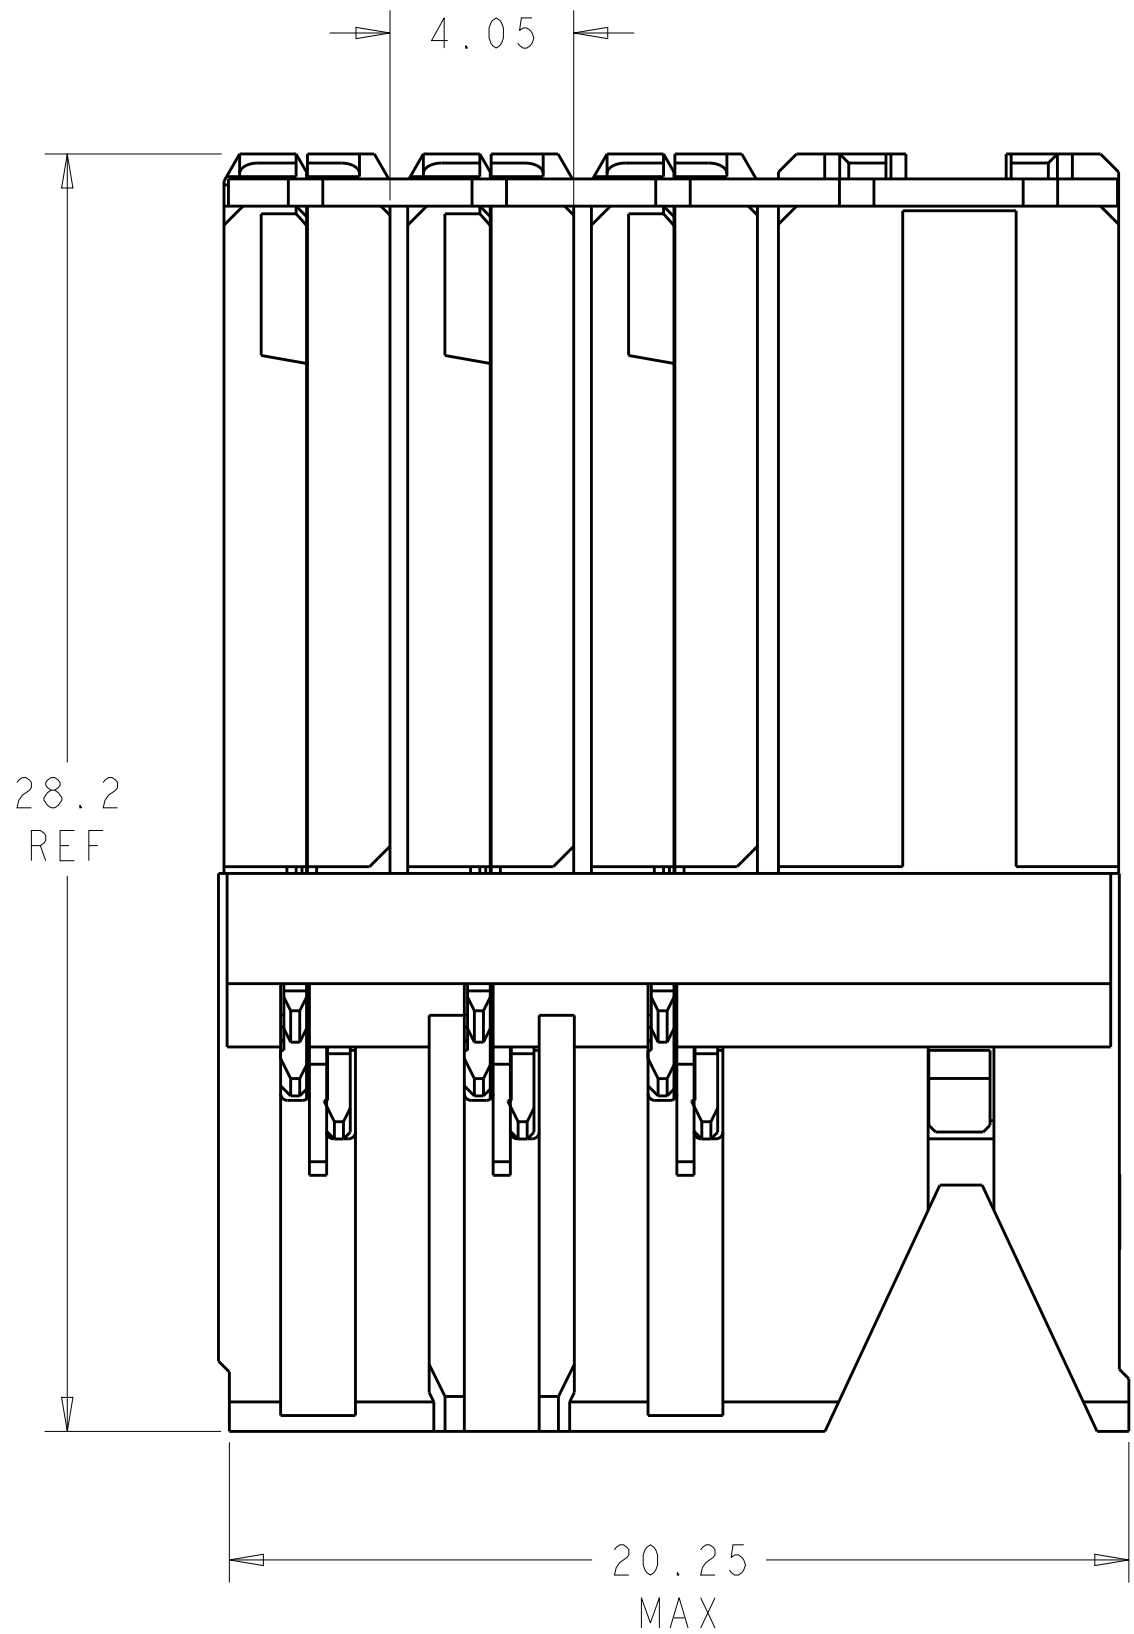

RECOMMENDED PCB LAYOUT
MIN BOARD THICKNESS 1.0

- 1 MATERIAL:
HOUSING: LCP, GLASS FILLED, UL94V-0.
TERMINALS: HIGH PERFORMANCE COPPER ALLOY.
- 2 FINISH:
30 μ " SELECTIVE GOLD IN CONTACT AREA. SELECTIVE TIN ON PCB TAILS, NICKEL OVERALL.
3. CONNECTORS SUPPLIED WITH MOUNTING SCREWS.

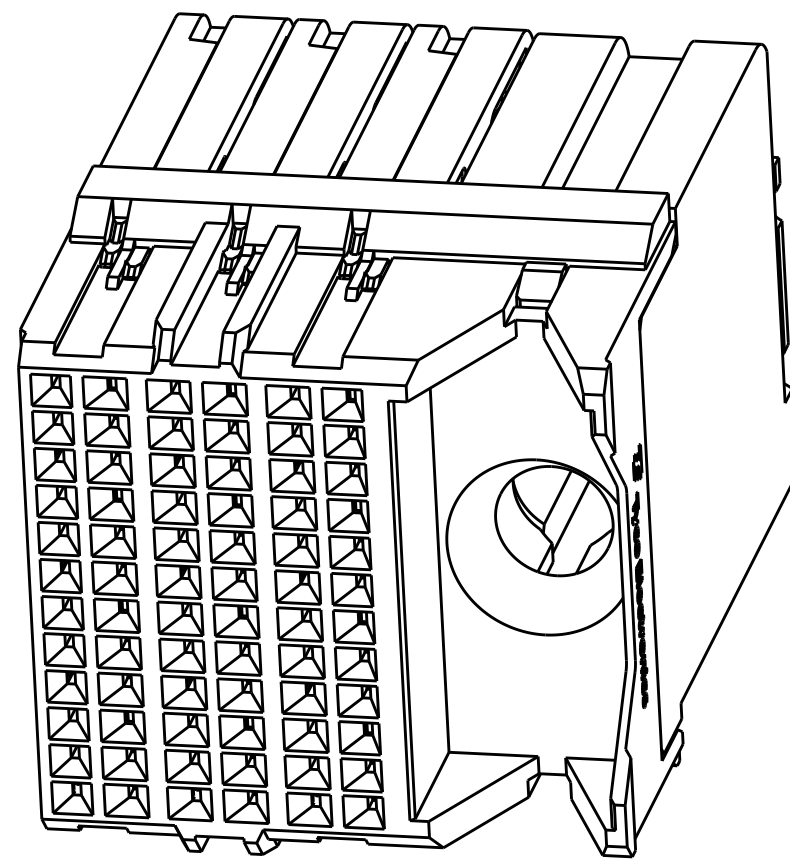

SCALE 4:1

REFER TO WWW.TE.COM
FOR PRODUCT AVAILABILITY

NONE	2	2132462-1
KEY POSITION	FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN AJITH PAI 23MAY2015	IMPACT, ORTHOGONAL, 4 PAIR, DAUGHTERCARD, 6 COLUMN, RIGHT GUIDED SIGNAL MODULE, 0.39 EYELET,	
DIMENSIONS: mm		CHK D. DIXON 23MAY2015		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D. DIXON 23MAY2015	NAME	
0 PLC $\pm$		PRODUCT SPEC	SIZE	
1 PLC ± 0.25		APPLICATION SPEC	CAGE CODE	
2 PLC ± 0.13		WEIGHT	DRAWING NO	
3 PLC $\pm$		A100779		RESTRICTED TO
4 PLC $\pm$		C=2132462		REV
ANGLES		CUSTOMER DRAWING		A
FINISH SEE TABLE		SCALE 4:1		SHEET 1 OF 1