

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20



© COPYRIGHT 20

BY -


ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	RELEASED	01DEC2011	RG	DO
	B	REVISED PER ECR-16-001405.	01FEB2016	RS	SZ

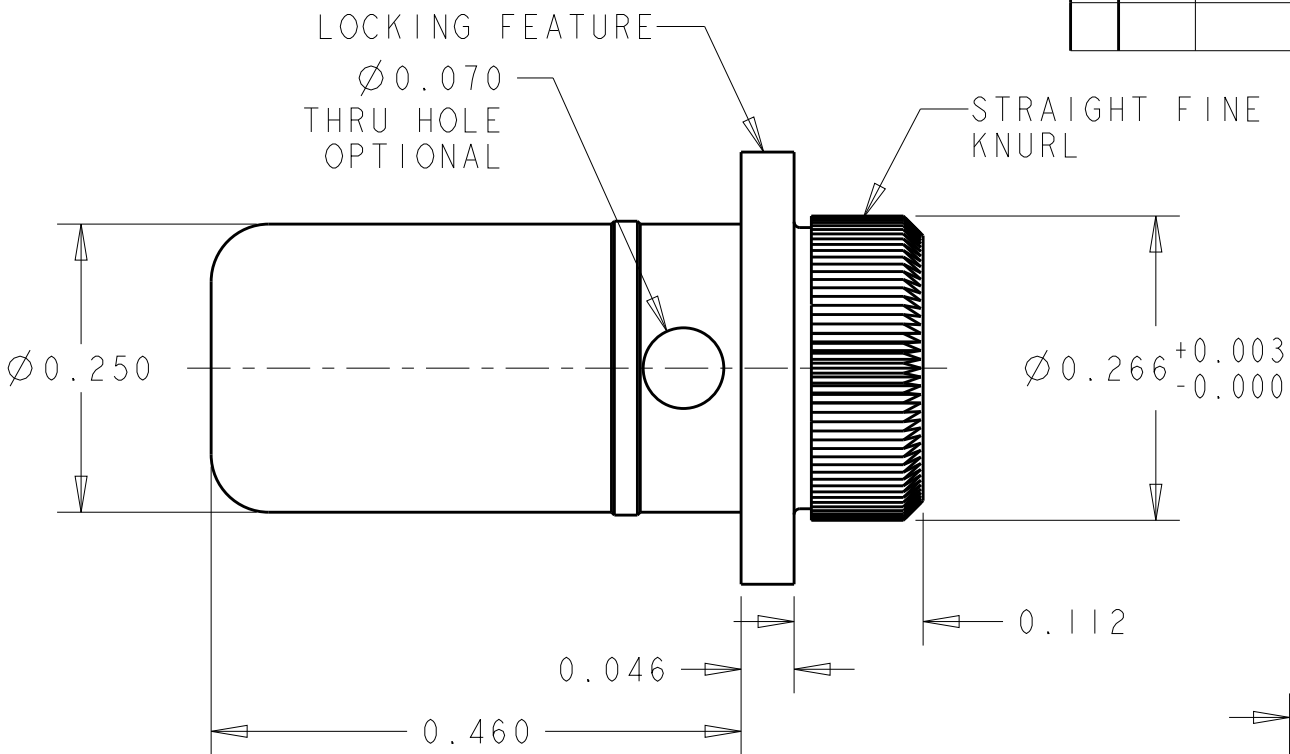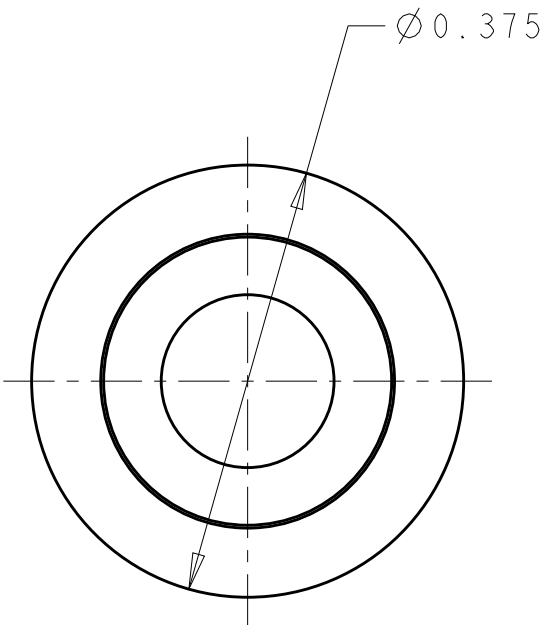

PIN CONTACT
P/N: 2085957-1

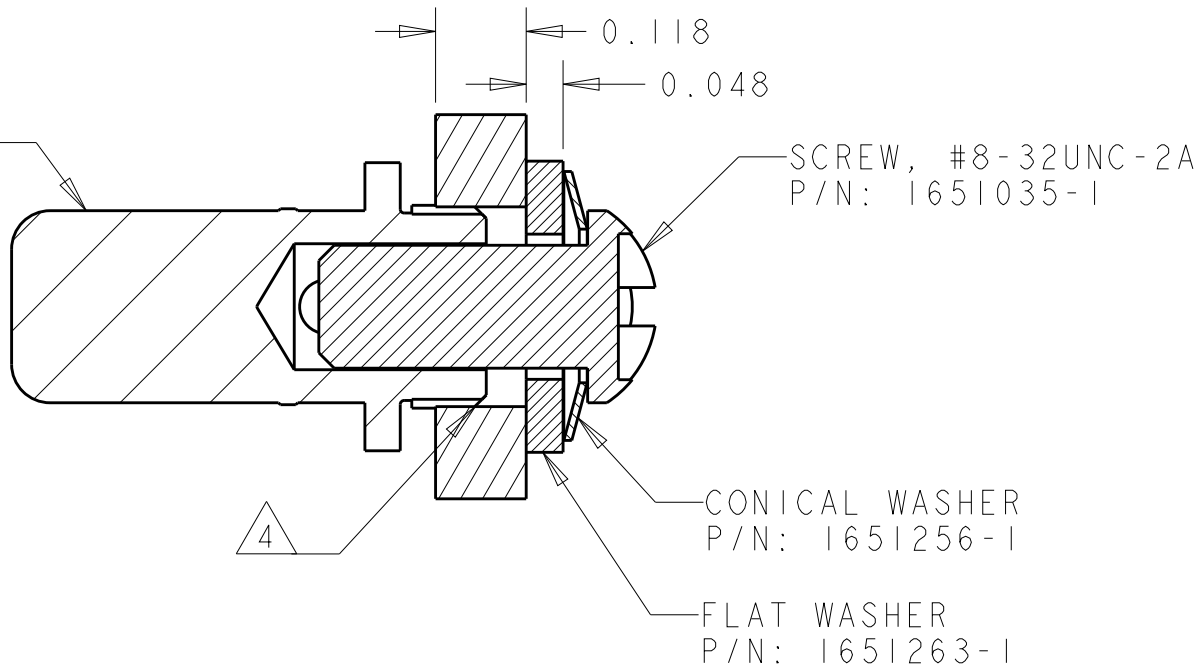

ASSEMBLY DETAIL

1. ITEMS PROVIDED TO THIS SPECIFICATION SHALL BE IDENTIFIED ON THE CONTAINER WITH THE FOLLOWING INFORMATION:
PART NUMBER & DATE CODE OF MANUFACTURE.


2 MATERIAL: PIN CONTACT: COPPER ALLOY
CONICAL WASHER: SPRING STEEL
SCREW & FLAT WASH.: STEEL

3 FINISH: PIN CONTACT: SILVER PLATE .000100 MIN THICK
OVER NICKEL .000050 MIN THICK.
SCREW: NICKEL PLATE
CONICAL & FLAT WASH.: NICKEL PLATE

4 RECOMMENDED HOLE DIAMETER AFTER PLATING:
Ø.260+.003/.001.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES



MATERIAL



TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ±.
1 PLC ±.
2 PLC ±.02
3 PLC ±.010
4 PLC ±.
ANGLES ±.5

FINISH



DWN 30NOV2011

CHK R.GRZYBOWSKI

APVD D.ORRIS 30NOV2011

PRODUCT SPEC

108-64019

APPLICATION SPEC

114-64005

WEIGHT -

CUSTOMER DRAWING



TE Connectivity

NAME PIN CONTACT, SIZ4 #4, SCREW MOUNT,
LOCKING STYLE, PRESS FIT

SIZE CAGE CODE DRAWING NO RESTRICTED TO

A300779 C-2085958 -

SCALE 1:1 SHEET 1 OF 1 REV B

2085958-1

PART NUMBER