





P	LTR	DESCRIPTION	DATE	DWN	APVD
D		REVISED PER ECO-20-013368	27SEP2020	RZ	HL

D

C

B


A

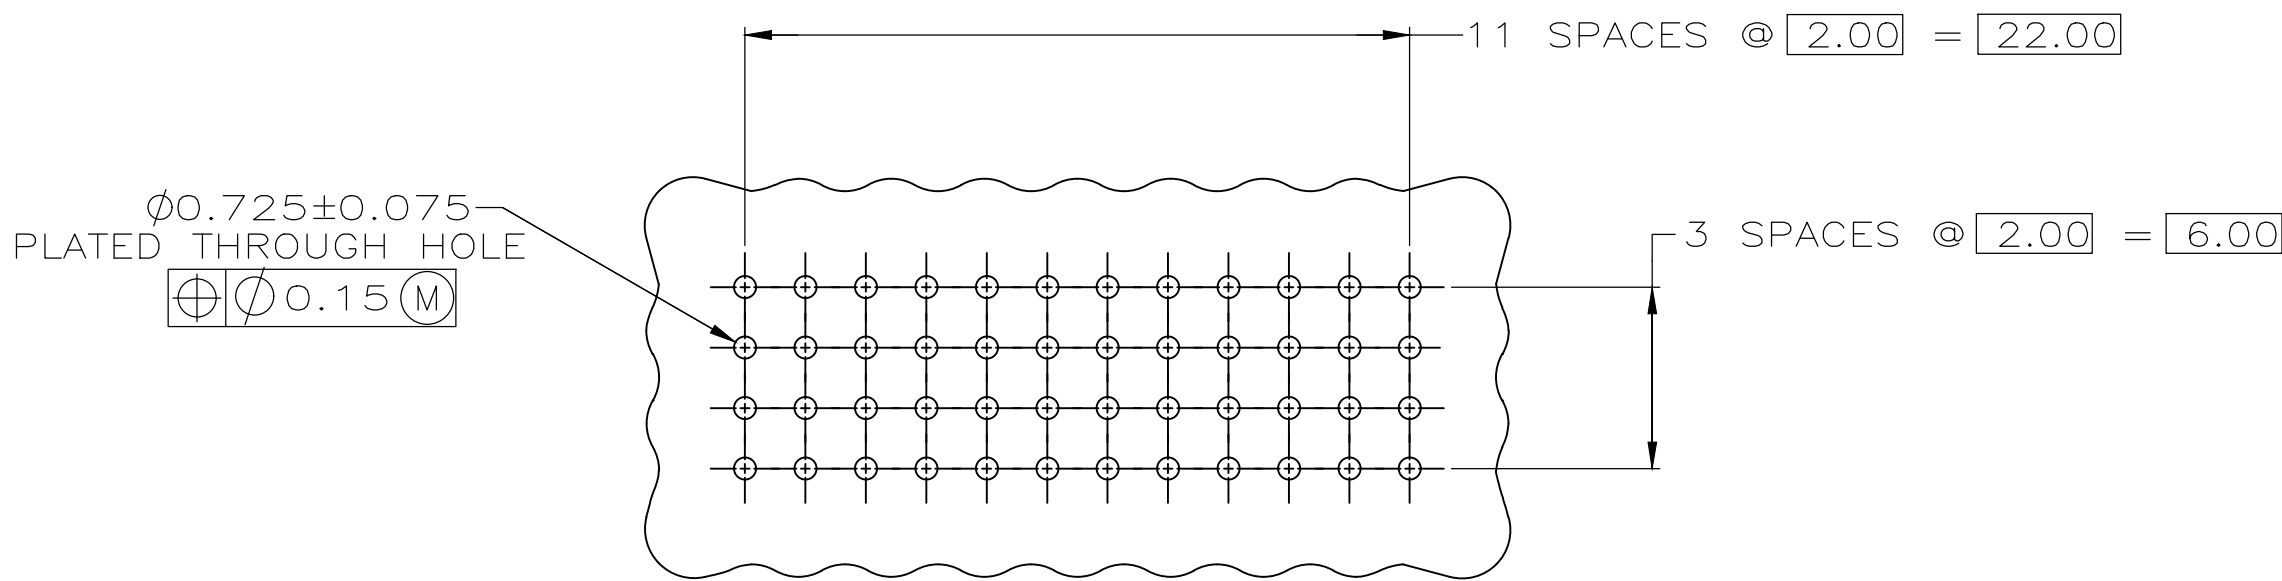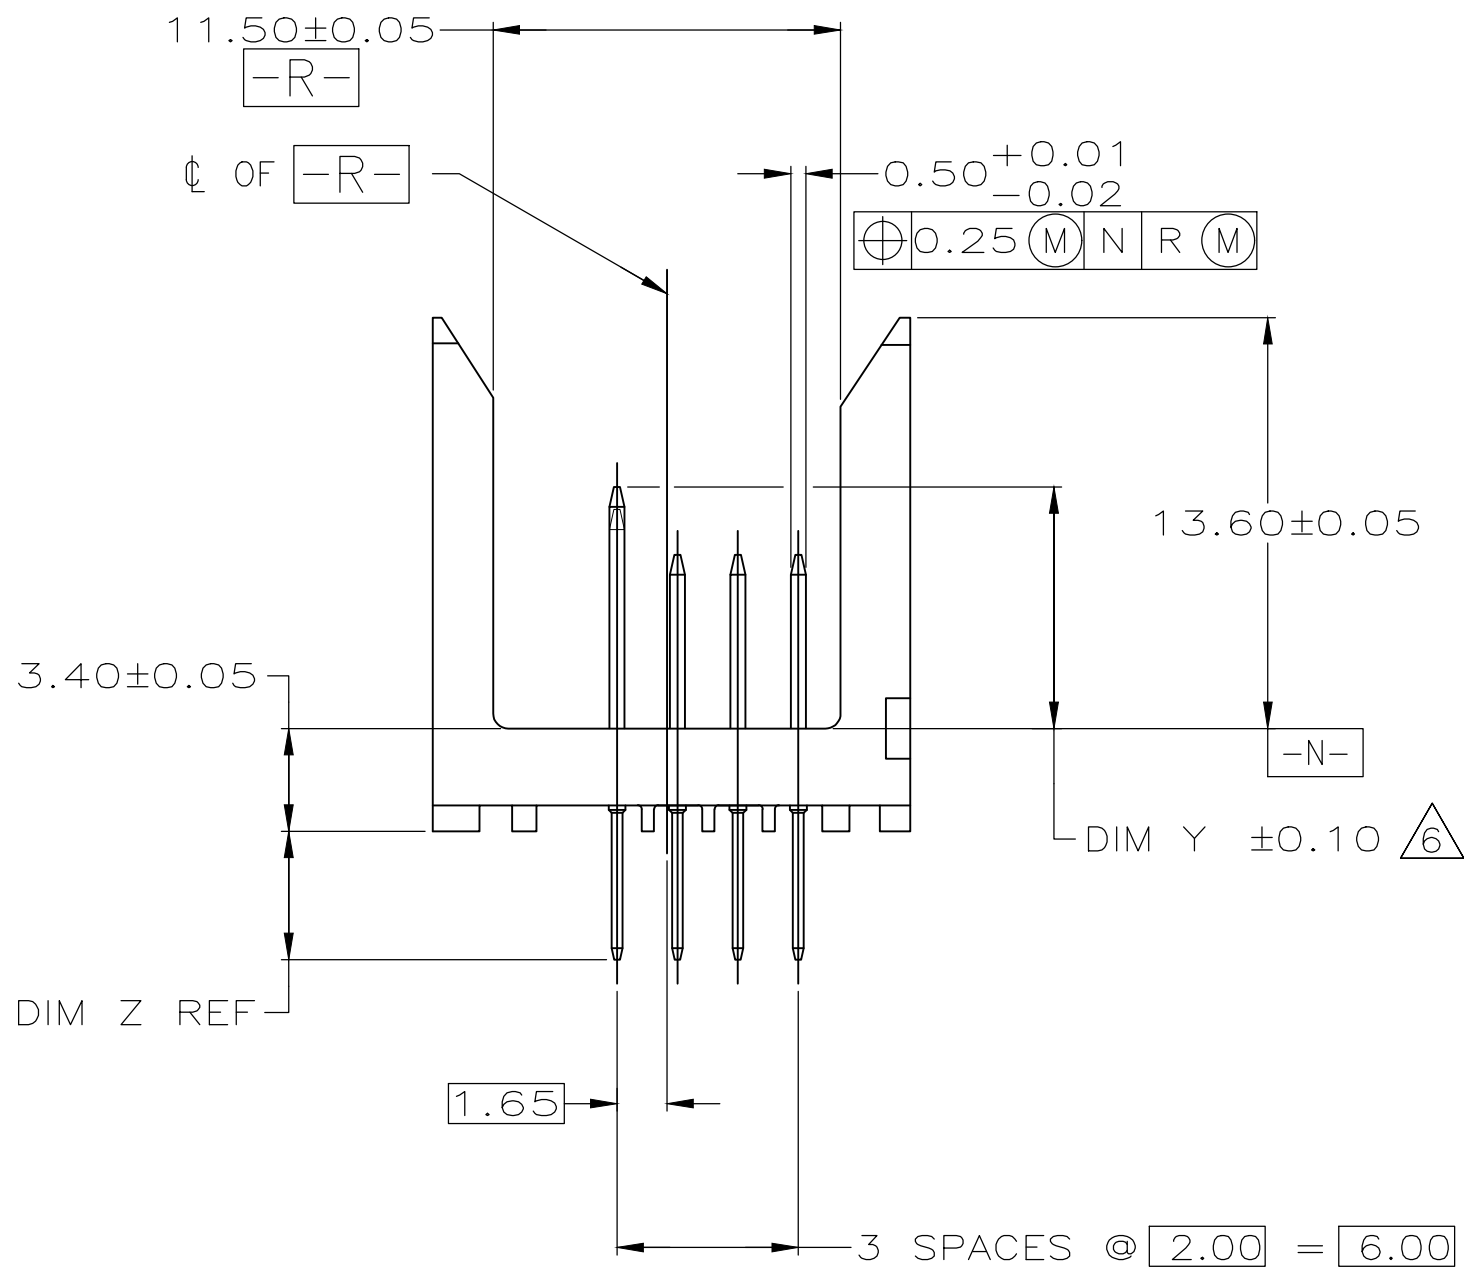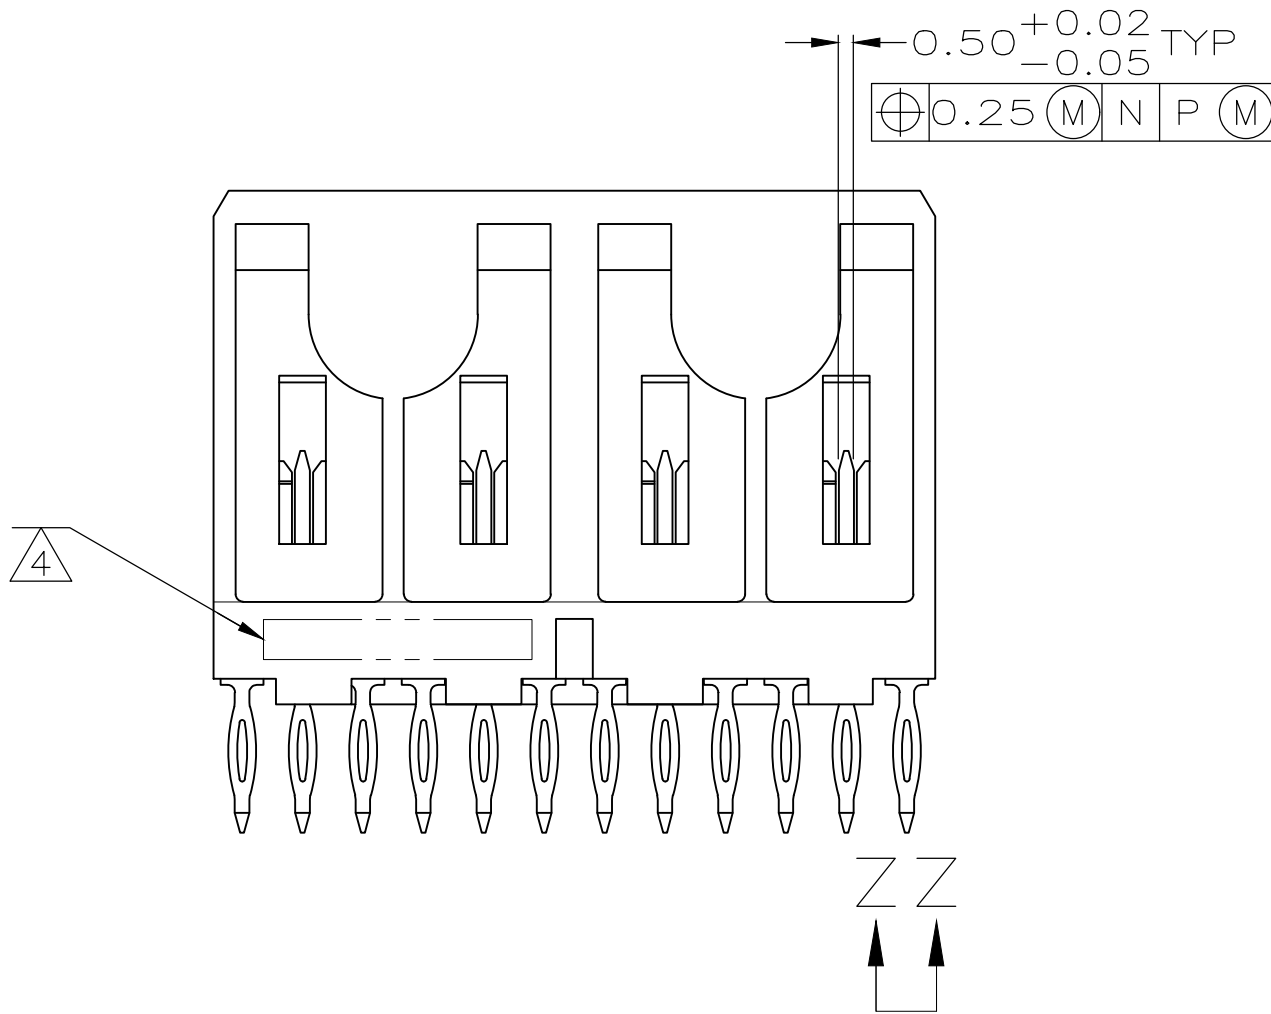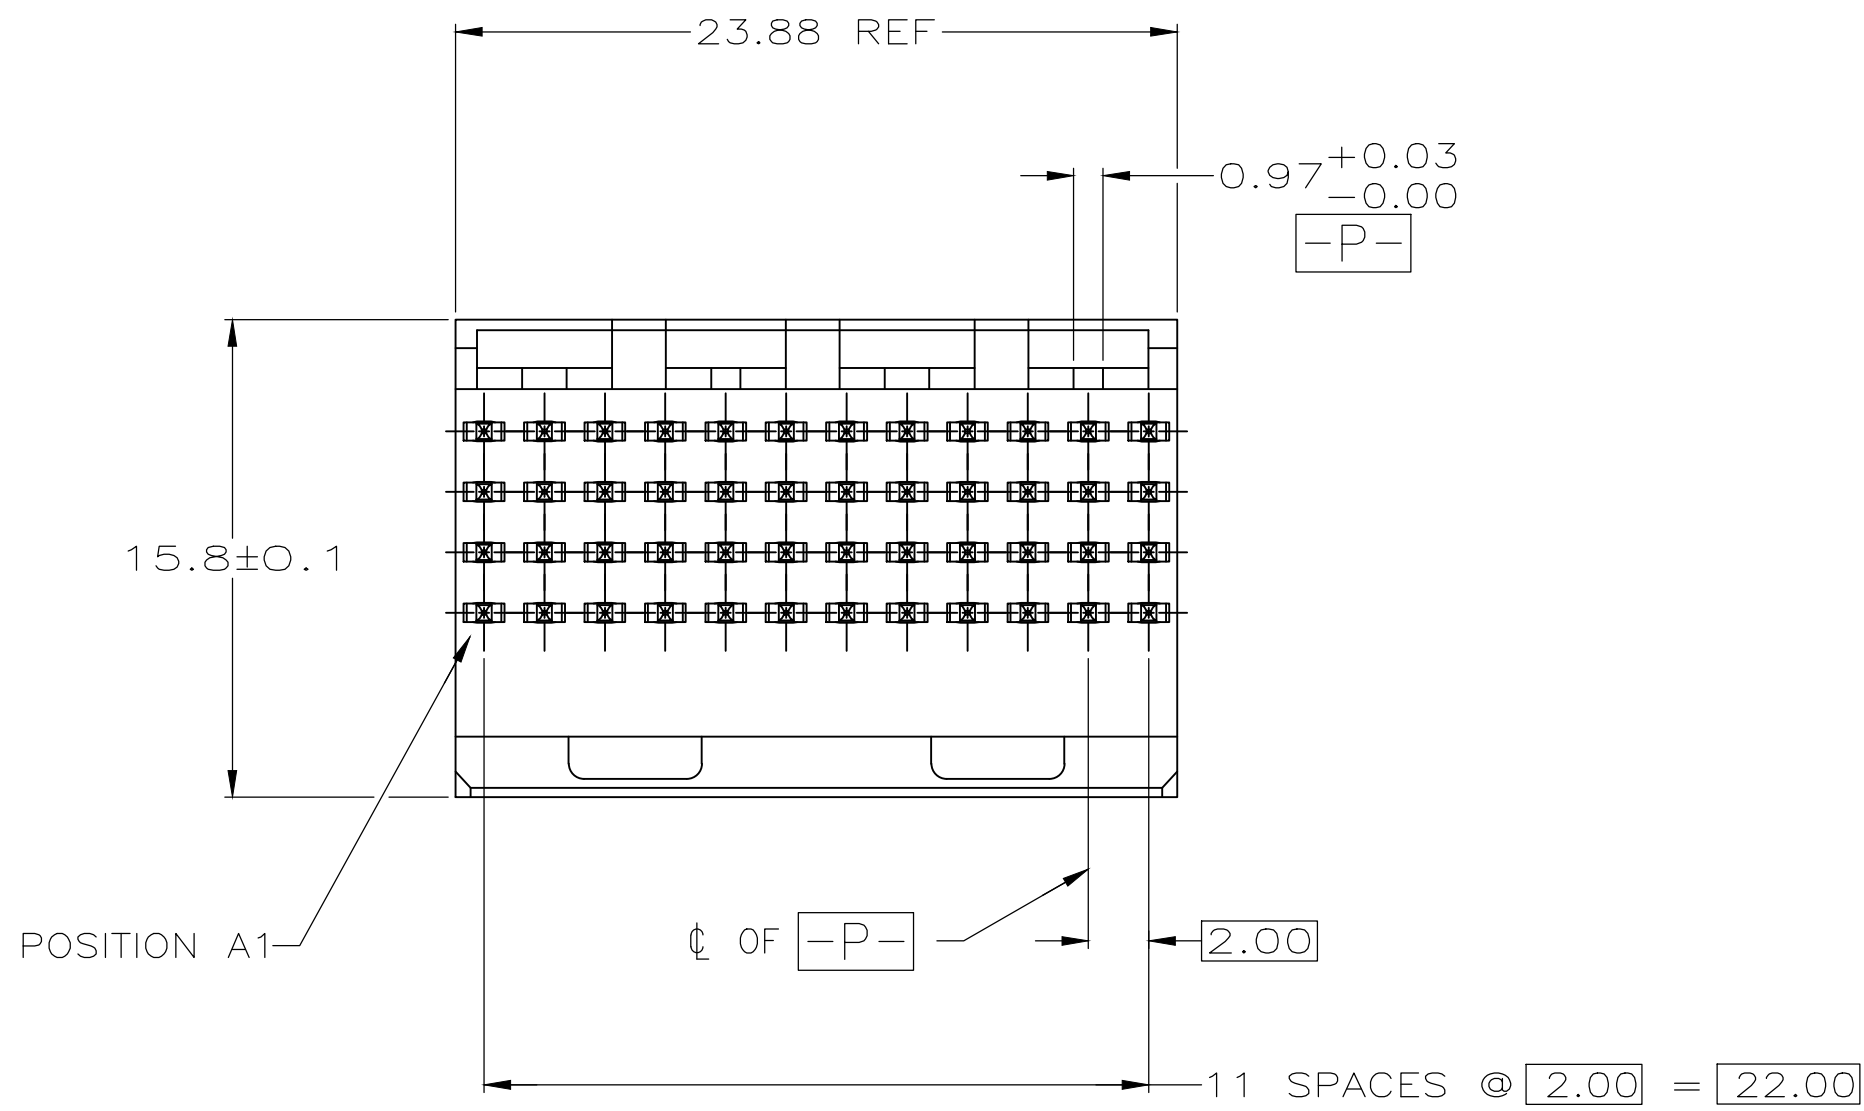


RECOMMENDED CIRCUIT PATTERN
PER IPC-D300 TYPE II, CLASS C
(COMPONENT SIDE)

- 1 HOUSING MATERIAL: LIQUID CRYSTAL POLYMER.
COLOR: NATURAL.
- 2 CONTACT MATERIAL: PHOSPHOR BRONZE.
- 3 CONTACT FINISH:(B)
UNDERPLATE (ENTIRE CONTACT):
0.00127 MIN NICKEL PER SAE-AMS-QQ-N-290
ON MATING SURFACES:
CONFORMS TO ALL TESTING SPECIFIED FOR TELCORDIA
UNCONTROLLED ENVIRONMENT.
ON LEADS:
0.0006 MIN MATTE TIN PER ASTM B 545 OVER UNDERPLATE.
LUBRICATION (MIN MATING SURFACES):
SURFACE CONDITIONER AFTER PLATING.

- 4 PART MARKING, LOCATED APPROXIMATELY AS SHOWN.
5. SEE SHEET 2 FOR SEQUENCING CHARTS.
- 6 DIMENSION APPLIES WHEN SEATED ON PRINTED CIRCUIT BOARD.
- 7 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

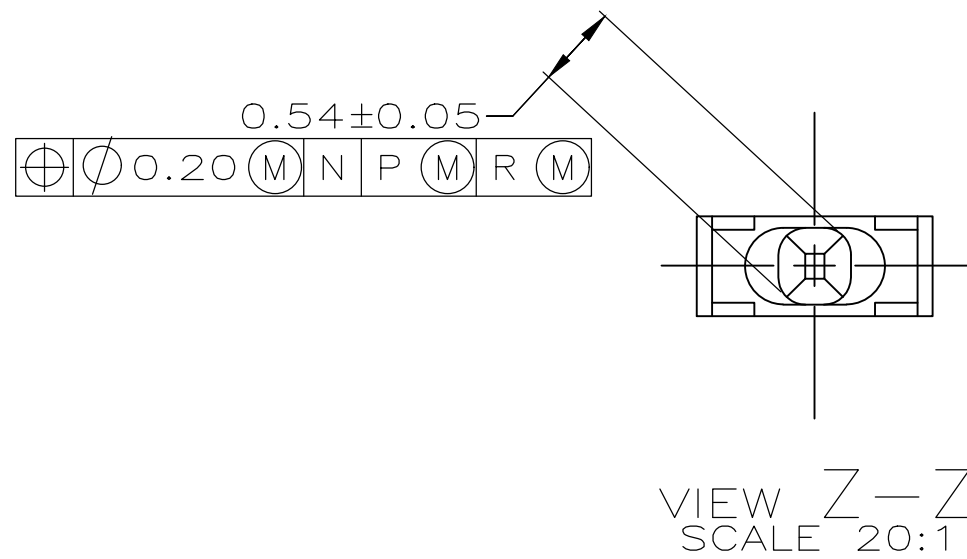

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B.MCMMASTER 15DEC04	 TE Connectivity				
DIMENSIONS: mm		CHK R.WERTZ 15DEC04					
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME R.WERTZ 15DEC04	PIN ASSY SIGNAL MODULE,Z-PACK 2mm FB 4R 48 POSN,PRESS FIT LEADS WITH SEQUENCING			
	0 PLC ± -				PRODUCT SPEC		
	1 PLC ± -				APPLICATION SPEC		
	2 PLC ± 0.13						
MATERIAL	3 PLC ± -		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
	4 PLC ± -		A1	00779	5223611		
FINISH		WEIGHT	SCALE			SHEET 1 OF 2	REV D
1		0	4:1				
2		CUSTOMER DRAWING					
3							

