
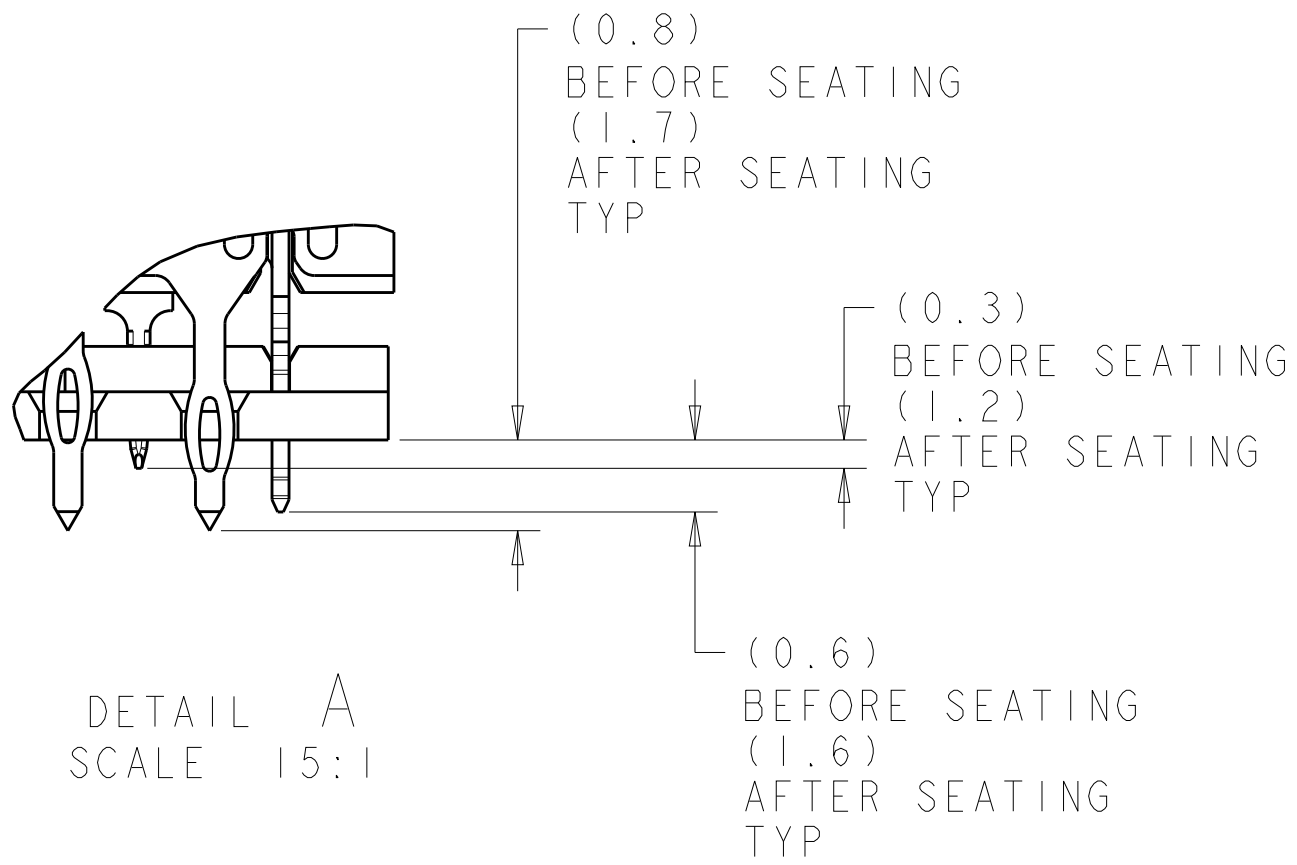
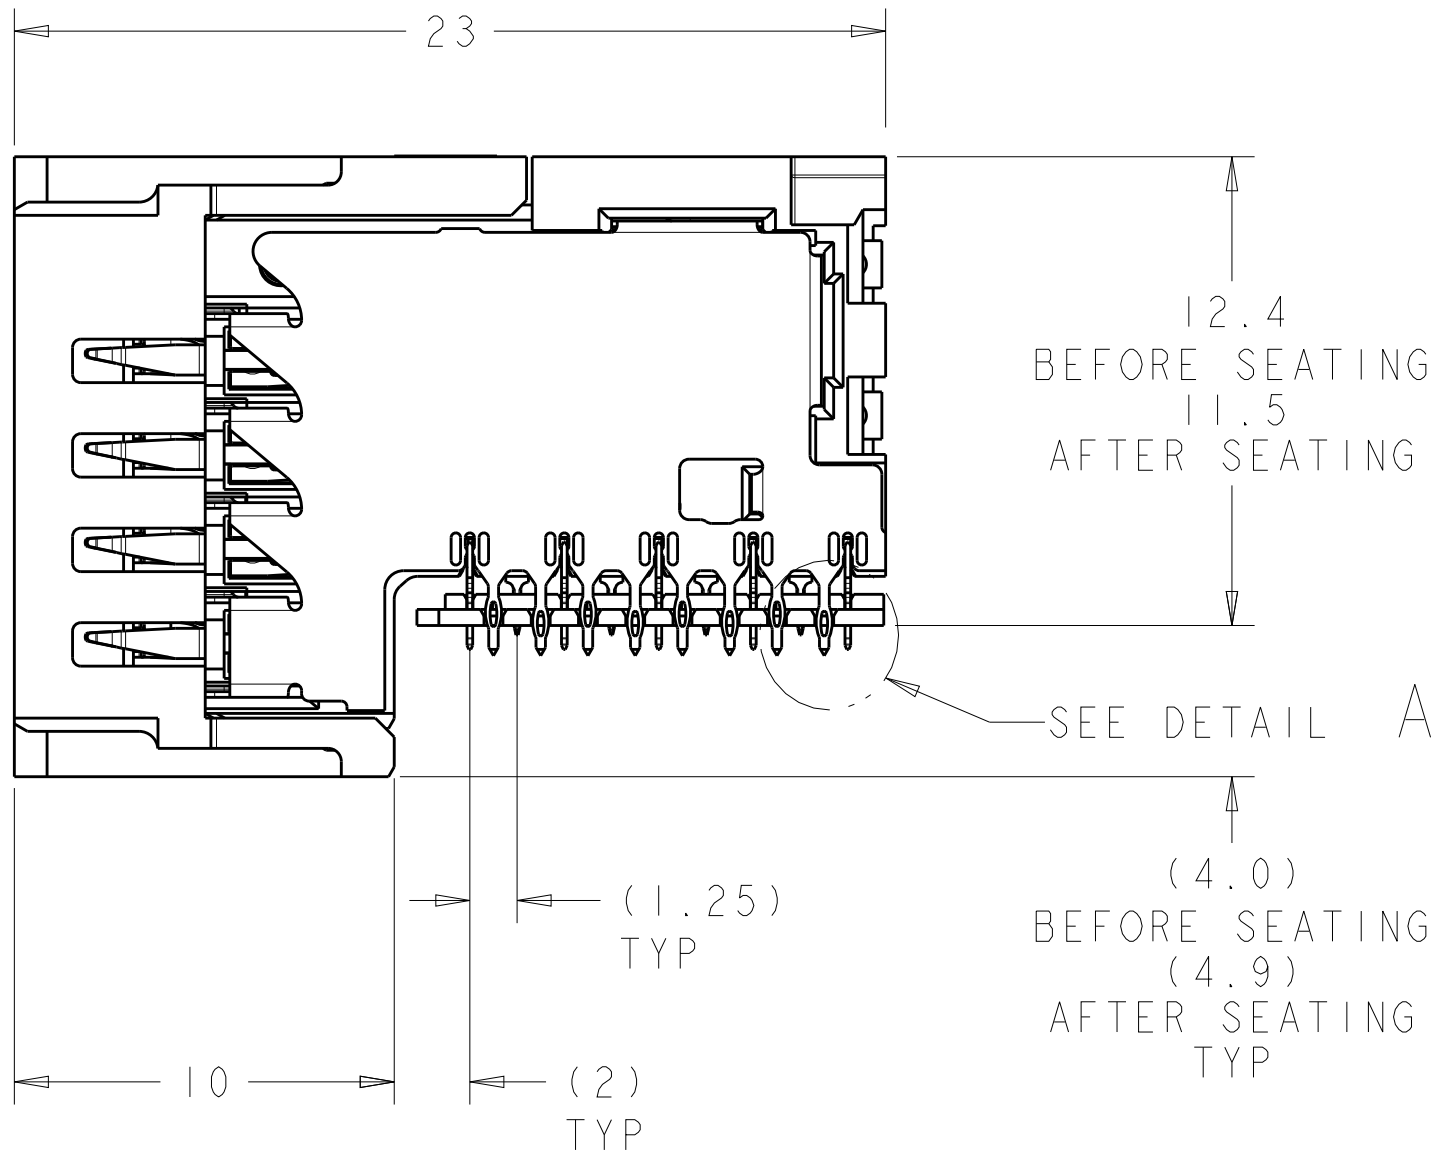
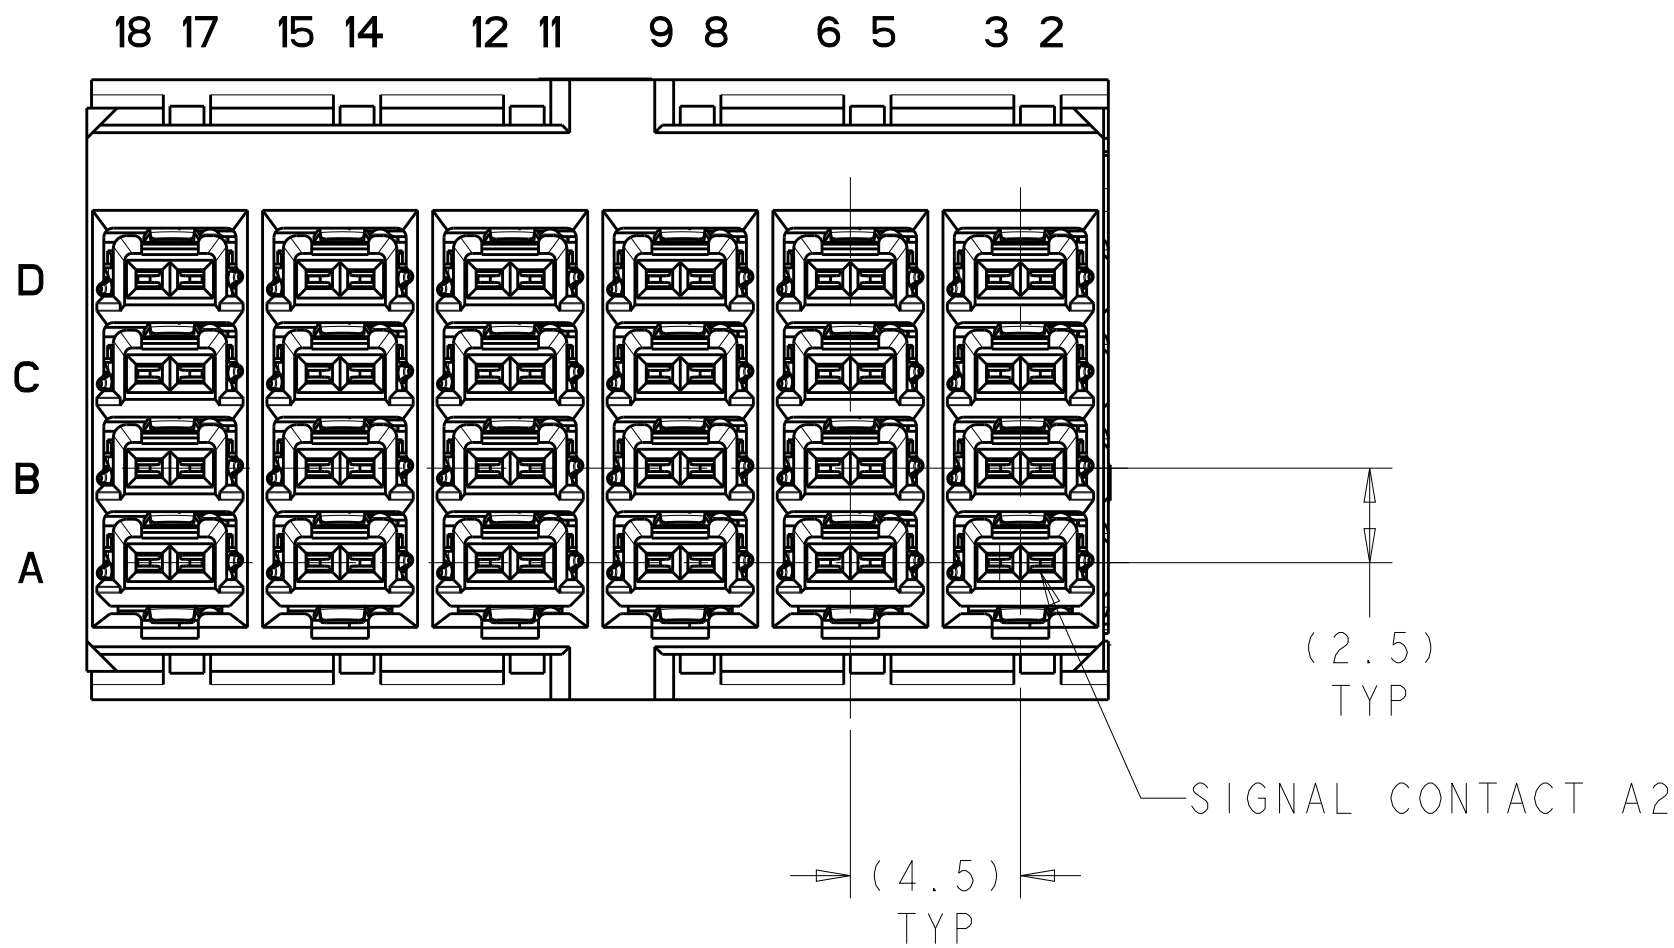


LOC		DIST		REVISIONS				
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD	
		A		RELEASED	25MAR2014	RT	NS	
		B		REVISED PER ECO-17-006848	10MAY2017	JM	SS	

- ⚠ MATERIAL:
CONTACT AND SHIELD - COPPER ALLOY.
HOUSINGS, AND ORGANIZER - THERMOPLASTIC, UL 94V-0, BLACK.
- ⚠ CONFORMS TO REQUIREMENTS OF TE PRODUCT SPECIFICATIONS 108-2413 & 108-32037, BASED ON TELCORDIA GR-1217-CORE FOR SYSTEM QUALITY LEVEL III; APPLICATIONS IN CONTROLLED ENVIRONMENTS (CENTRAL OFFICE).
- ⚠ CONNECTOR MARKED WITH PART NUMBER, DATE CODE, MANUFACTURING LOCATION IDENTIFICATION CODE, AND 2D BARCODE IN APPROXIMATE AREA SHOWN.
4. CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 2, DECEMBER 2008.
- ⚠ PLATED THRU HOLE REQUIREMENTS:
FINISHED HOLE = $\varnothing 0.344\pm 0.039$
DRILLED HOLE = $\varnothing 0.420\pm 0.013$
COPPER THICKNESS = 0.038 ± 0.013
IMMERSION TIN IF APPLICABLE = 0.00051 ± 0.00013
- ⚠ PLATED THRU HOLE REQUIREMENTS:
FINISHED HOLE = $\varnothing 0.244\pm 0.039$
DRILLED HOLE = $\varnothing 0.320\pm 0.013$
COPPER THICKNESS = 0.038 ± 0.013
IMMERSION TIN IF APPLICABLE = 0.00051 ± 0.00013
- ⚠ PTH DIMENSIONS APPLY TO 1.00mm DEPTH FROM MOUNT SIDE OF PCB.
- ⚠ HOLE POSITION TOLERANCE APPLIES WITHIN PATTERN FOR CONNECTOR PATTERN TO CONNECTOR PATTERN, A 0.12⌀ POSITION TOLERANCE APPLIES.


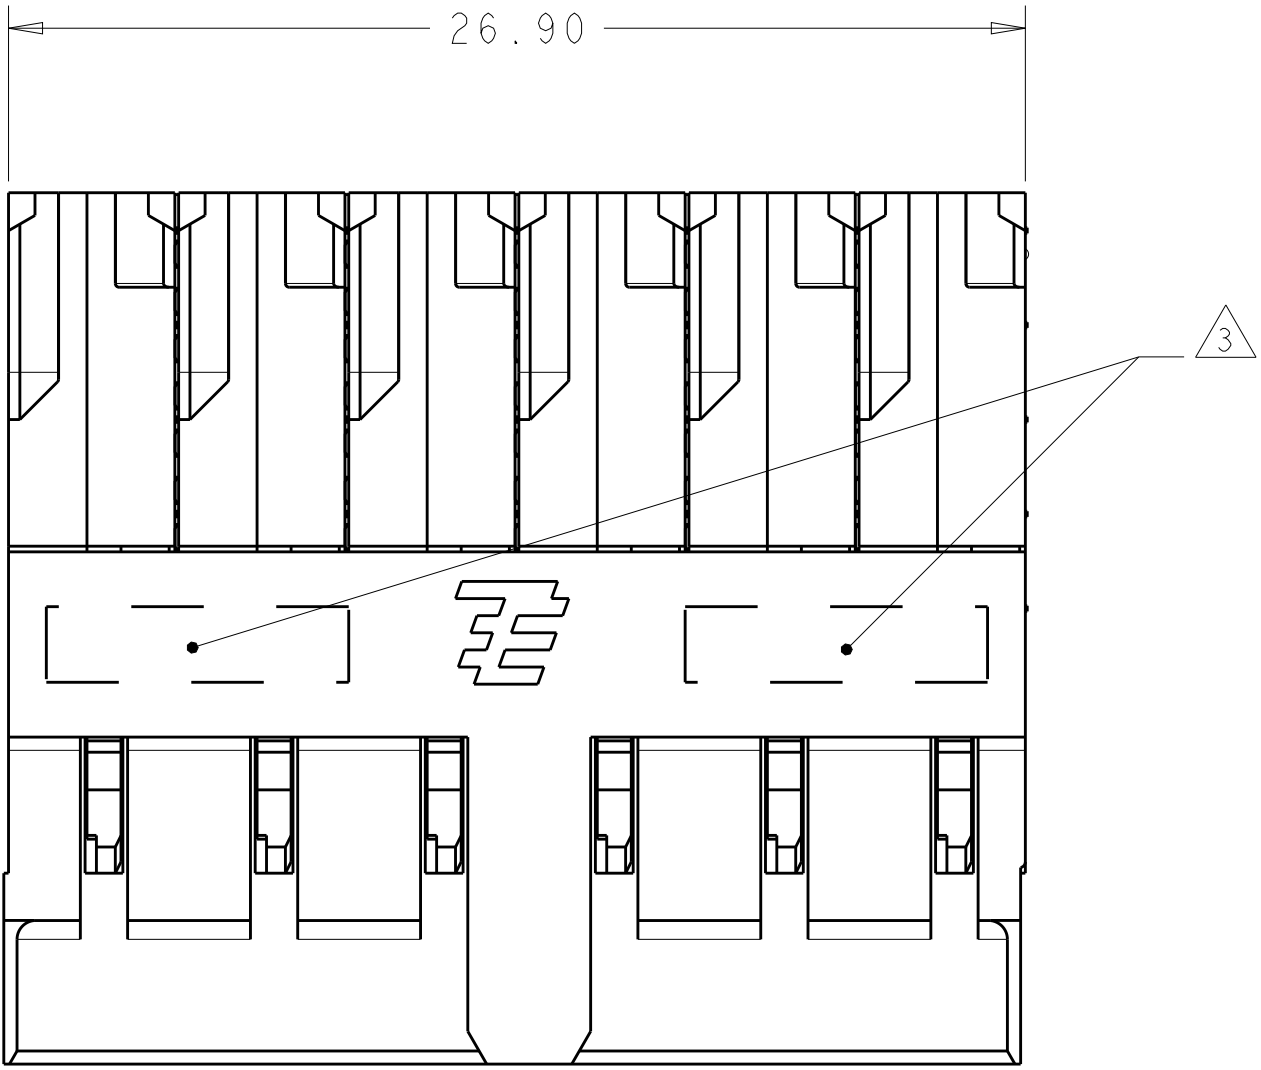


TIN	2198267-2
TIN-LEAD	2198267-1
PRESS FIT	PART NO
TAIL PLATING	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. THOMPSON 29NOV2011	TE Connectivity	
		CHK N. SWANGER 29NOV2011		
DIMENSIONS:		APVD N. SWANGER 29NOV2011	NAME	
mm		PRODUCT SPEC	RECEPTACLE ASSEMBLY, 4 PAIR 6 COLUMN, RIGHT ANGLE, 4.5mm PITCH, STRADA WHISPER 360	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC	SIZE	
0 PLC ±0.2		114-13301	A100779C=2198267	
1 PLC ±0.2		WEIGHT	Customer Drawing	
2 PLC ±0.08			SCALE 5:1	
3 PLC ±0.08			SHEET 1 OF 2	
4 PLC ±0.013			REV B	
ANGLES ±°				
FINISH				
SEE TABLE				

LOC		DIST		REVISIONS				
GP		00		P	LTR	DESCRIPTION		DATE
						SEE SHEET 1		

FOOTPRINT SHOWN IS FOR SINGLE MODULE APPLICATION. WHEN CONNECTORS ARE STACKED SIDE BY SIDE, THESE SI VIAS ARE USED AS GROUNDS BY THE NEXT CONNECTOR

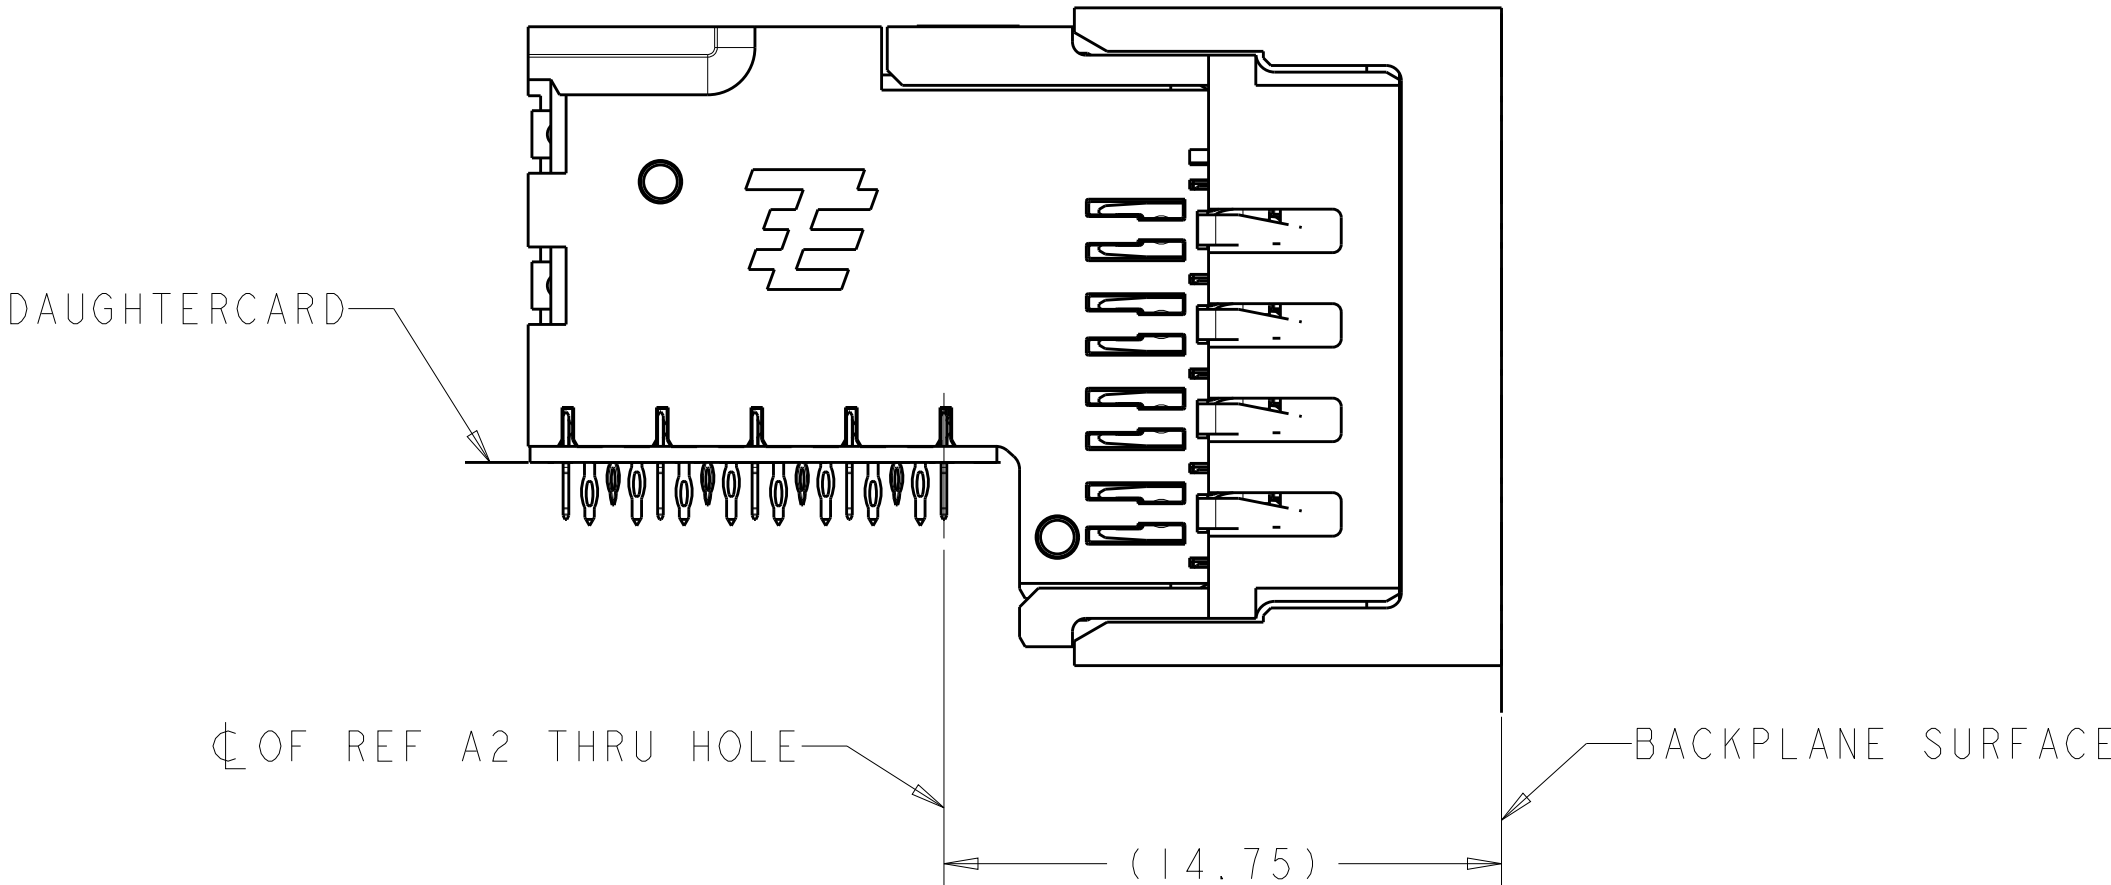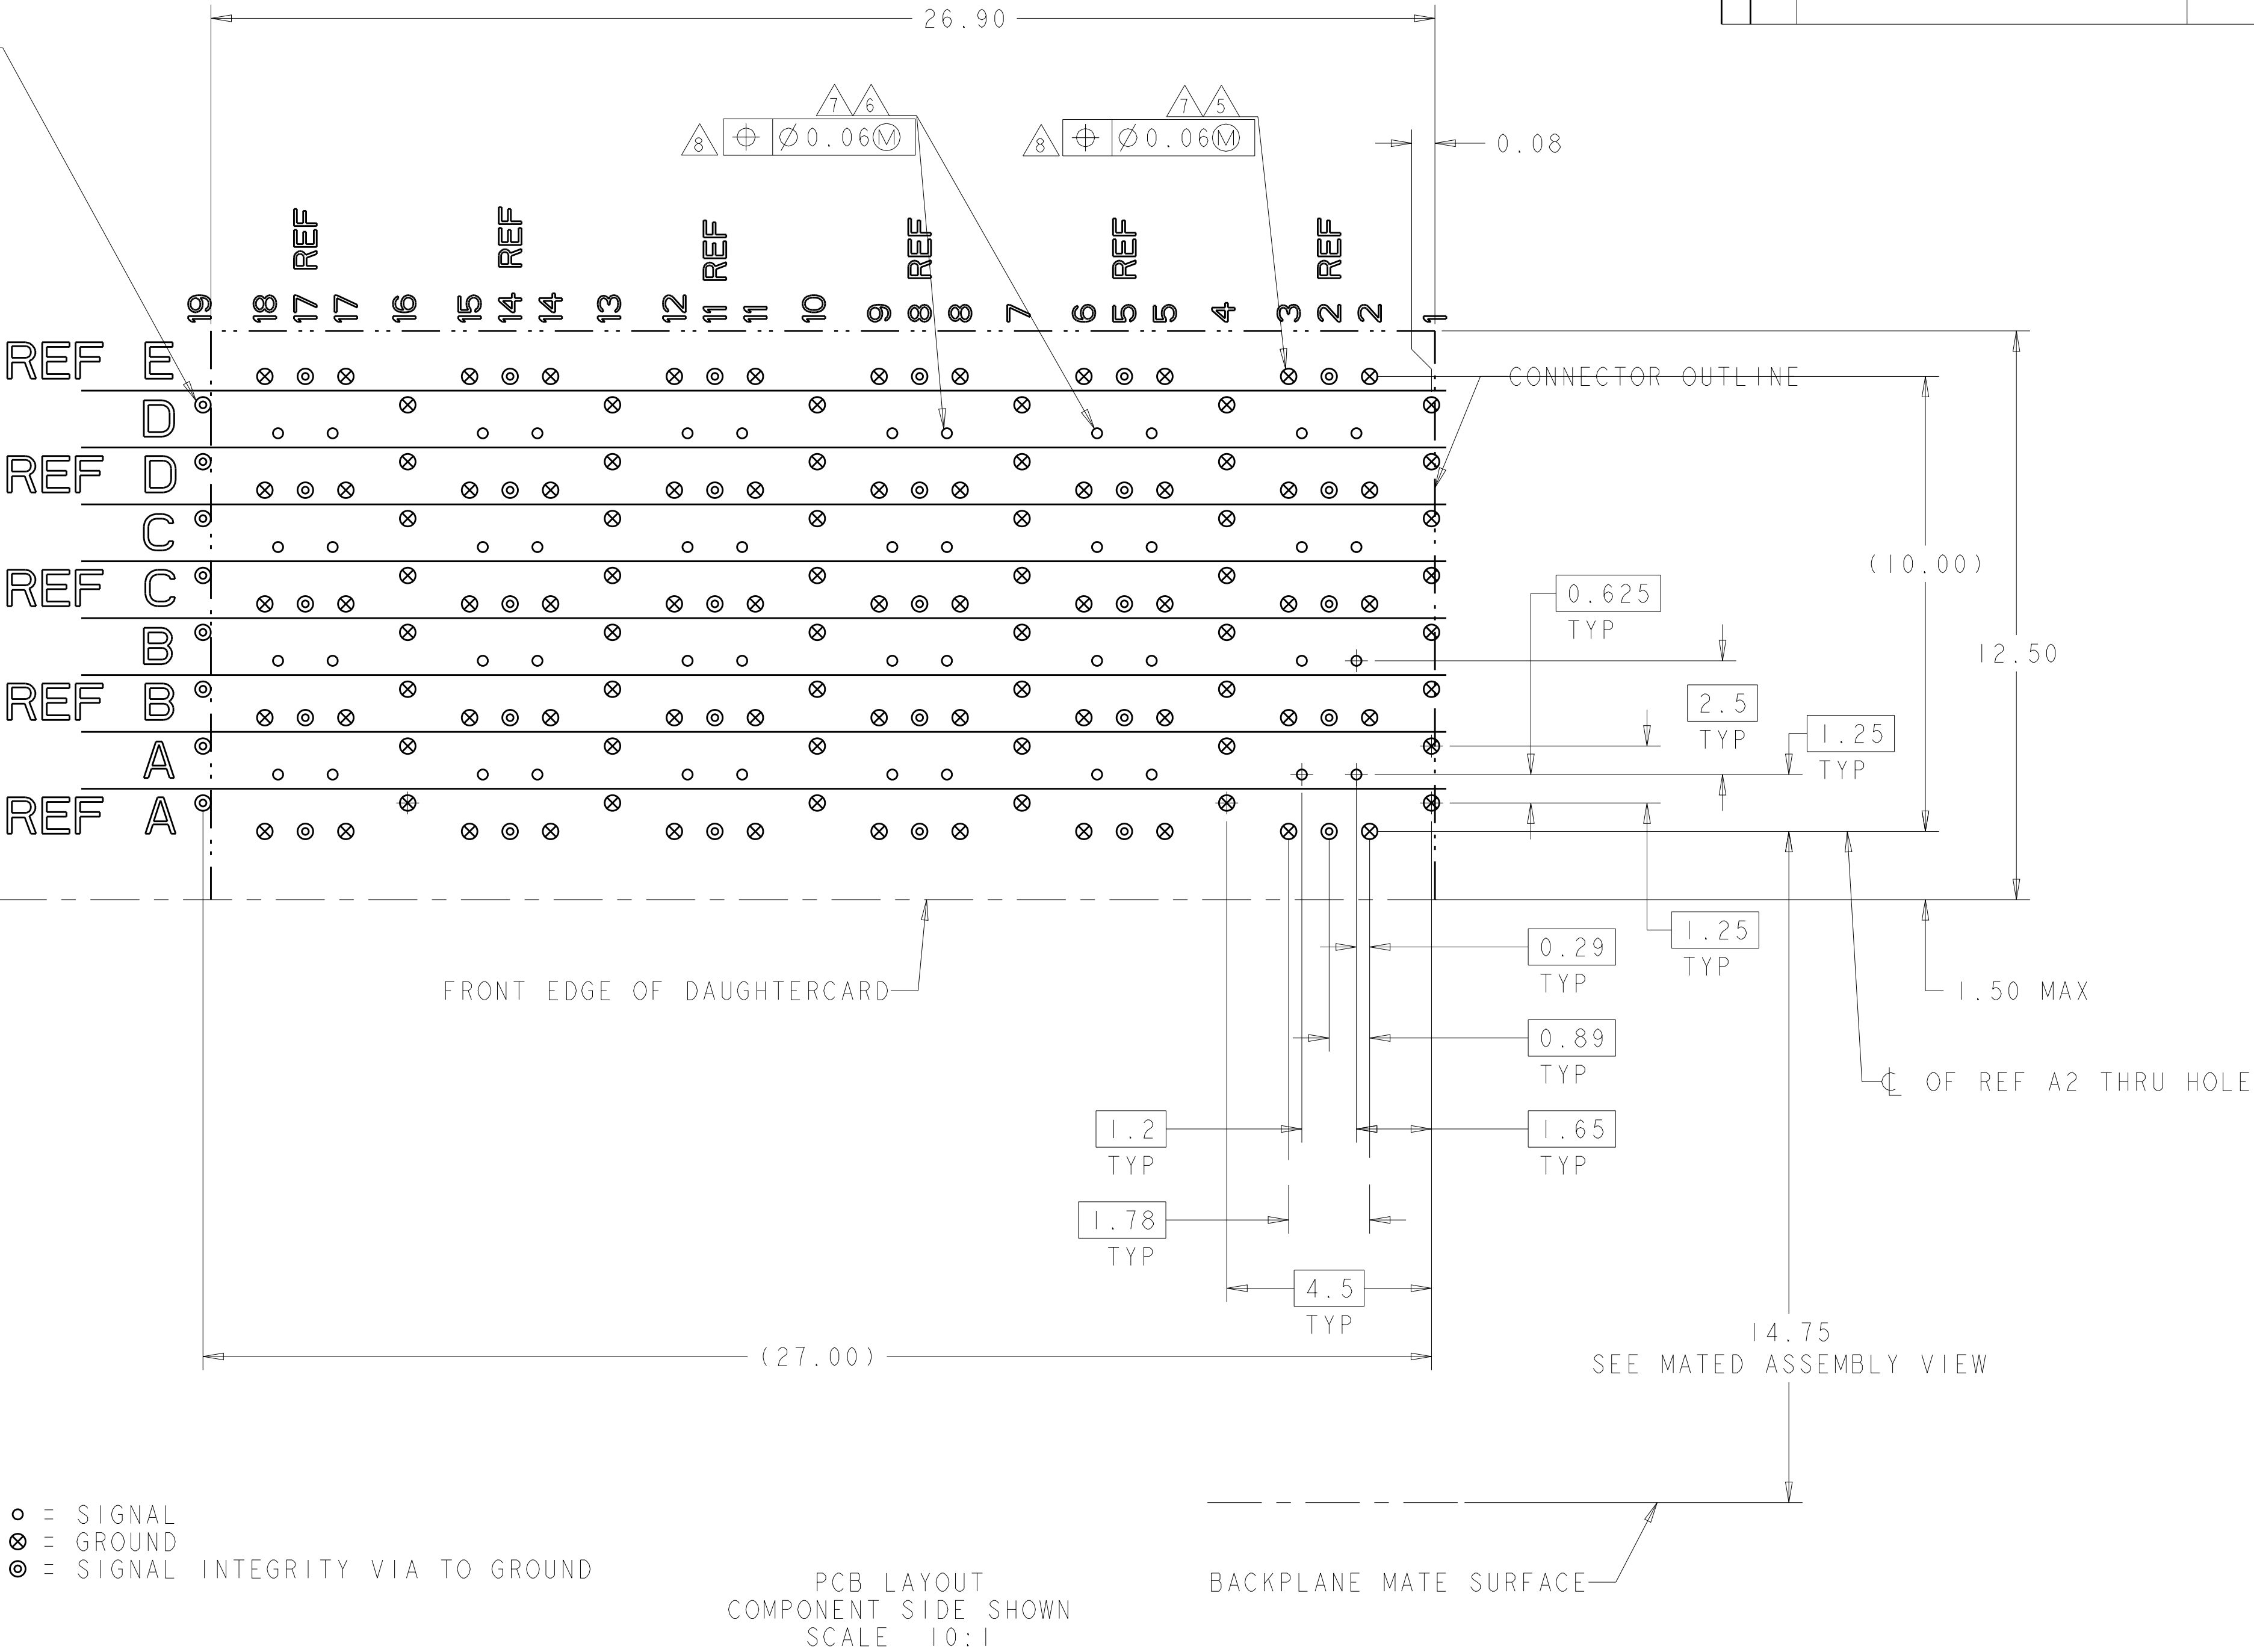

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. THOMPSON 29NOV2011	TE Connectivity	
DIMENSIONS:		CHK N. SWANGER 29NOV2011		
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD N. SWANGER 29NOV2011	NAME	
	0 PLC ±0.2	PRODUCT SPEC	RECEPTACLE ASSEMBLY, 4 PAIR 6 COLUMN, RIGHT ANGLE, 4.5mm PITCH, STRADA WHISPER 360	
	1 PLC ±0.5	APPLICATION SPEC		
	2 PLC ±0.08			
	3 PLC ±0.013			
MATERIAL	FINISH	WEIGHT	SIZE	RESTRICTED TO
-	-	-	A100779C=2198267	-
Customer Drawing		SCALE 5:1	SHEET 2 OF 2	REV B