
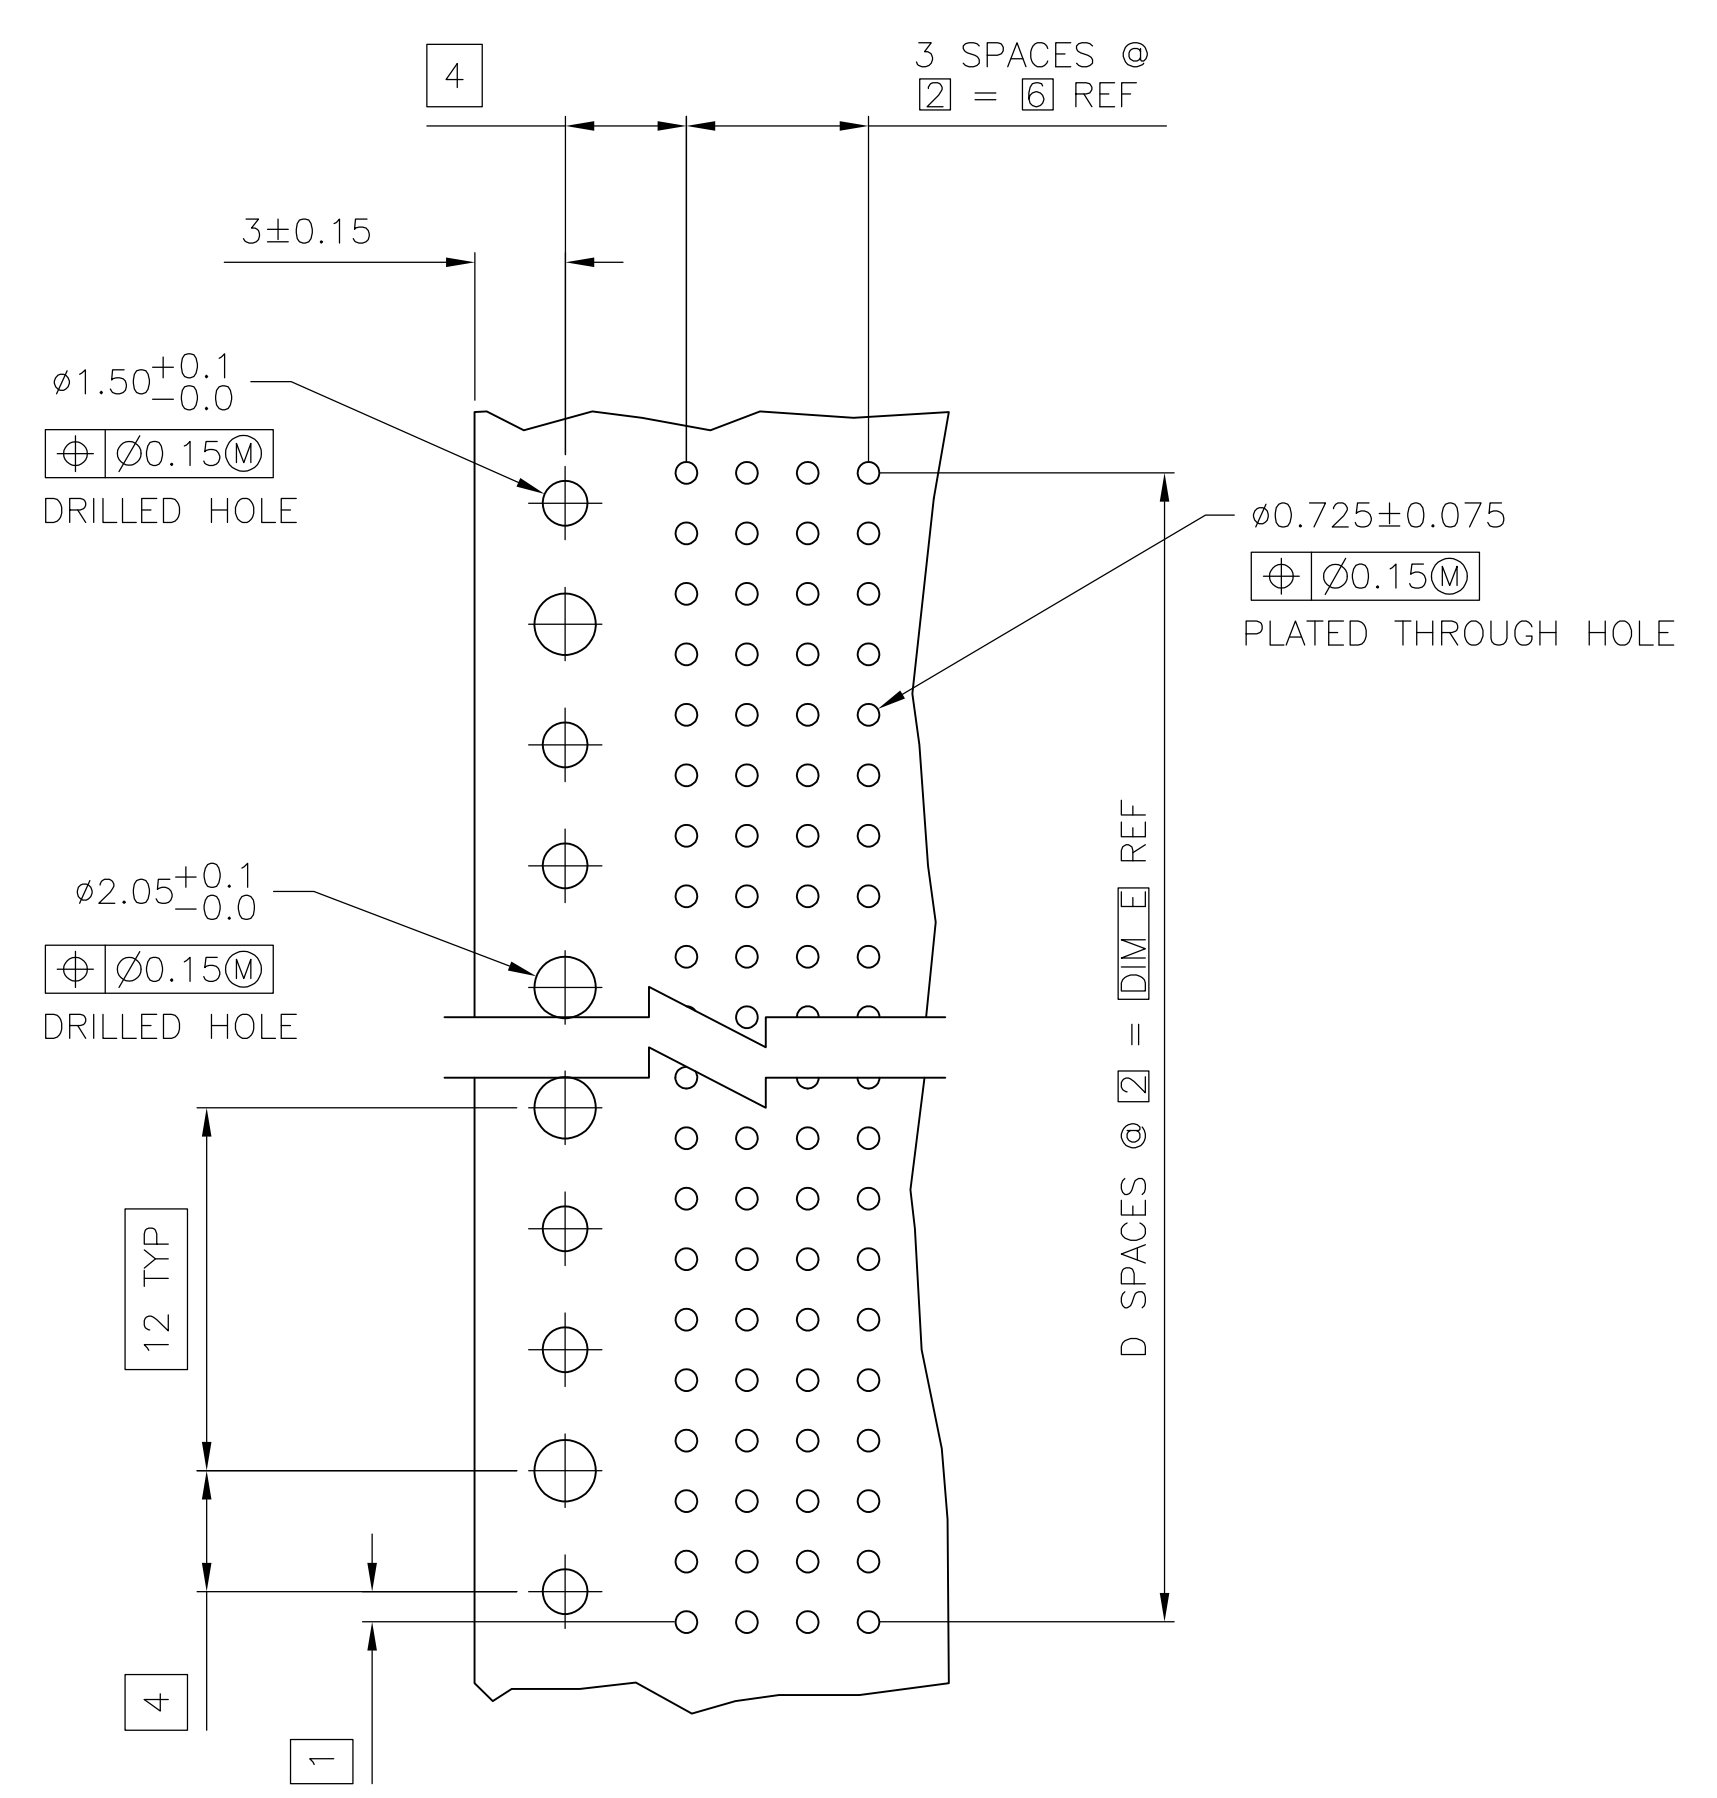
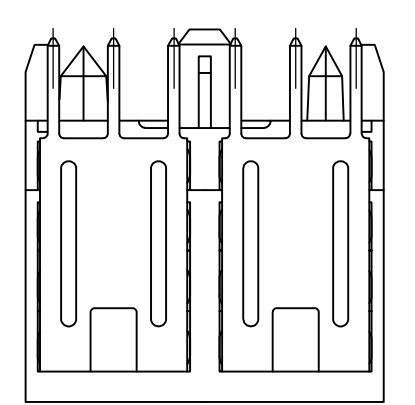
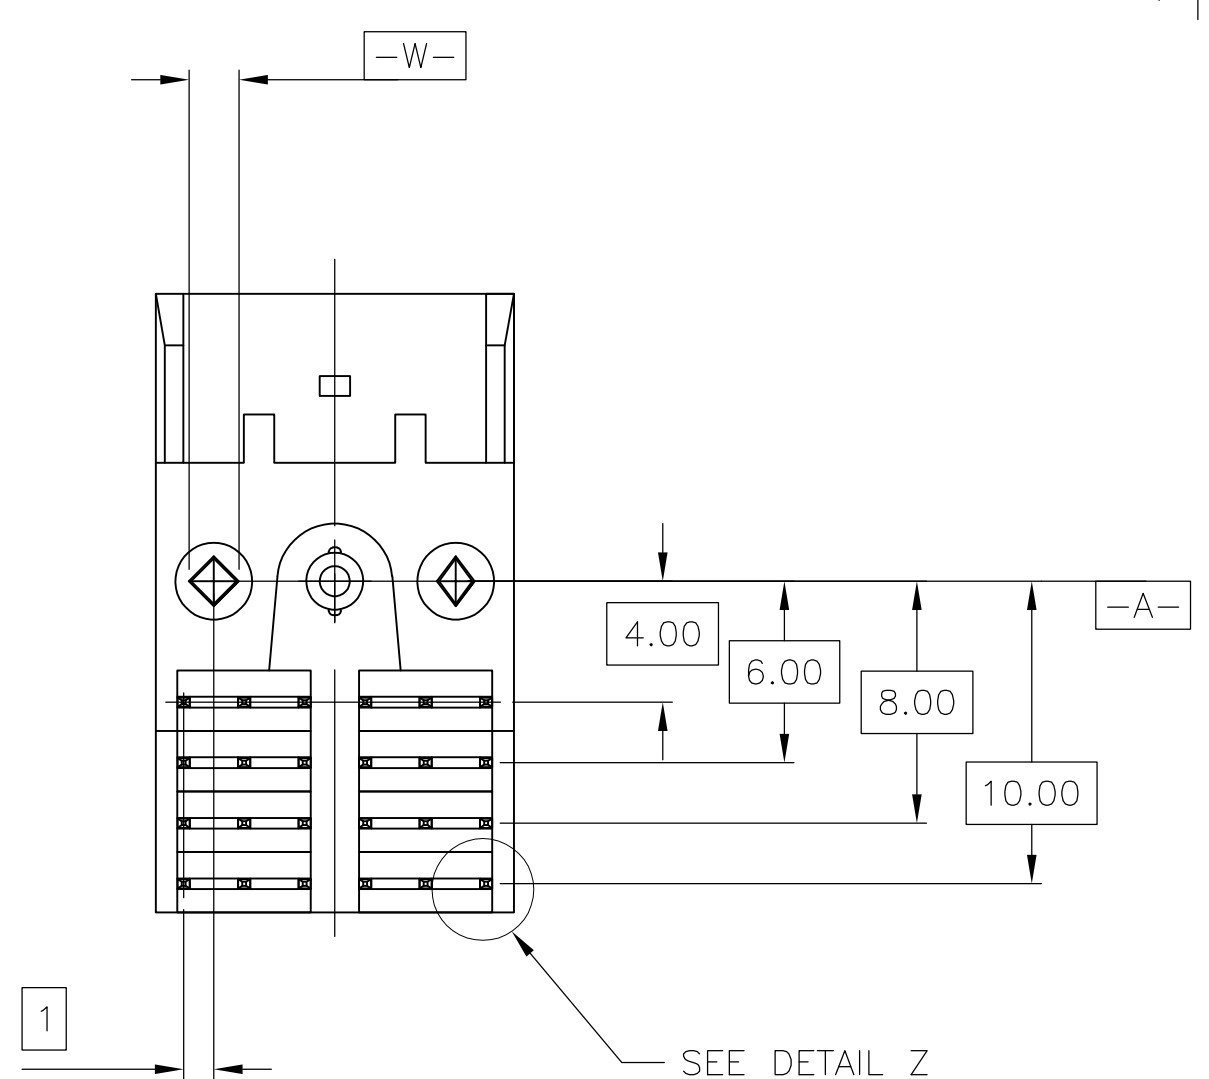
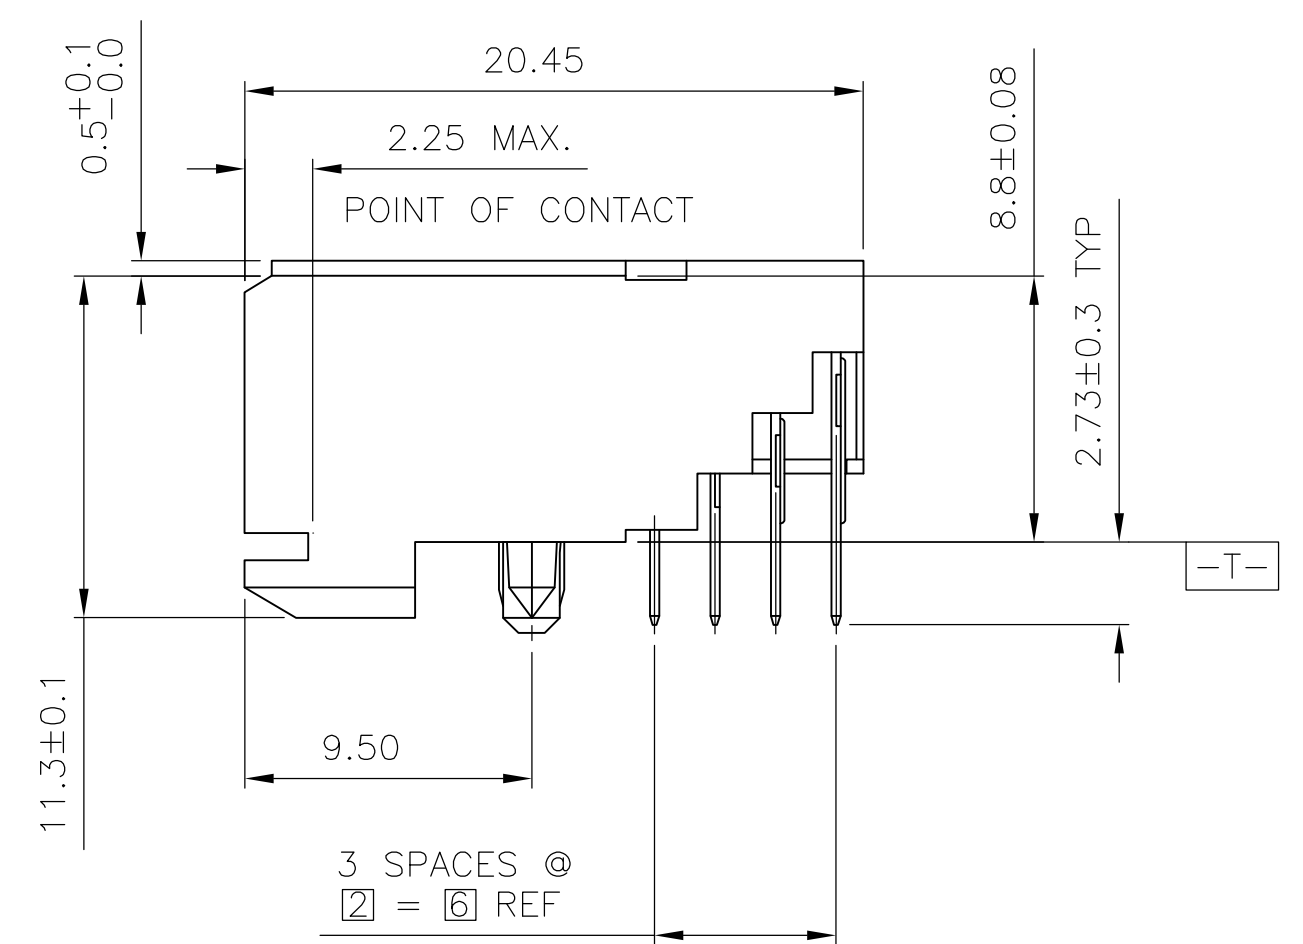


D

C


B

A

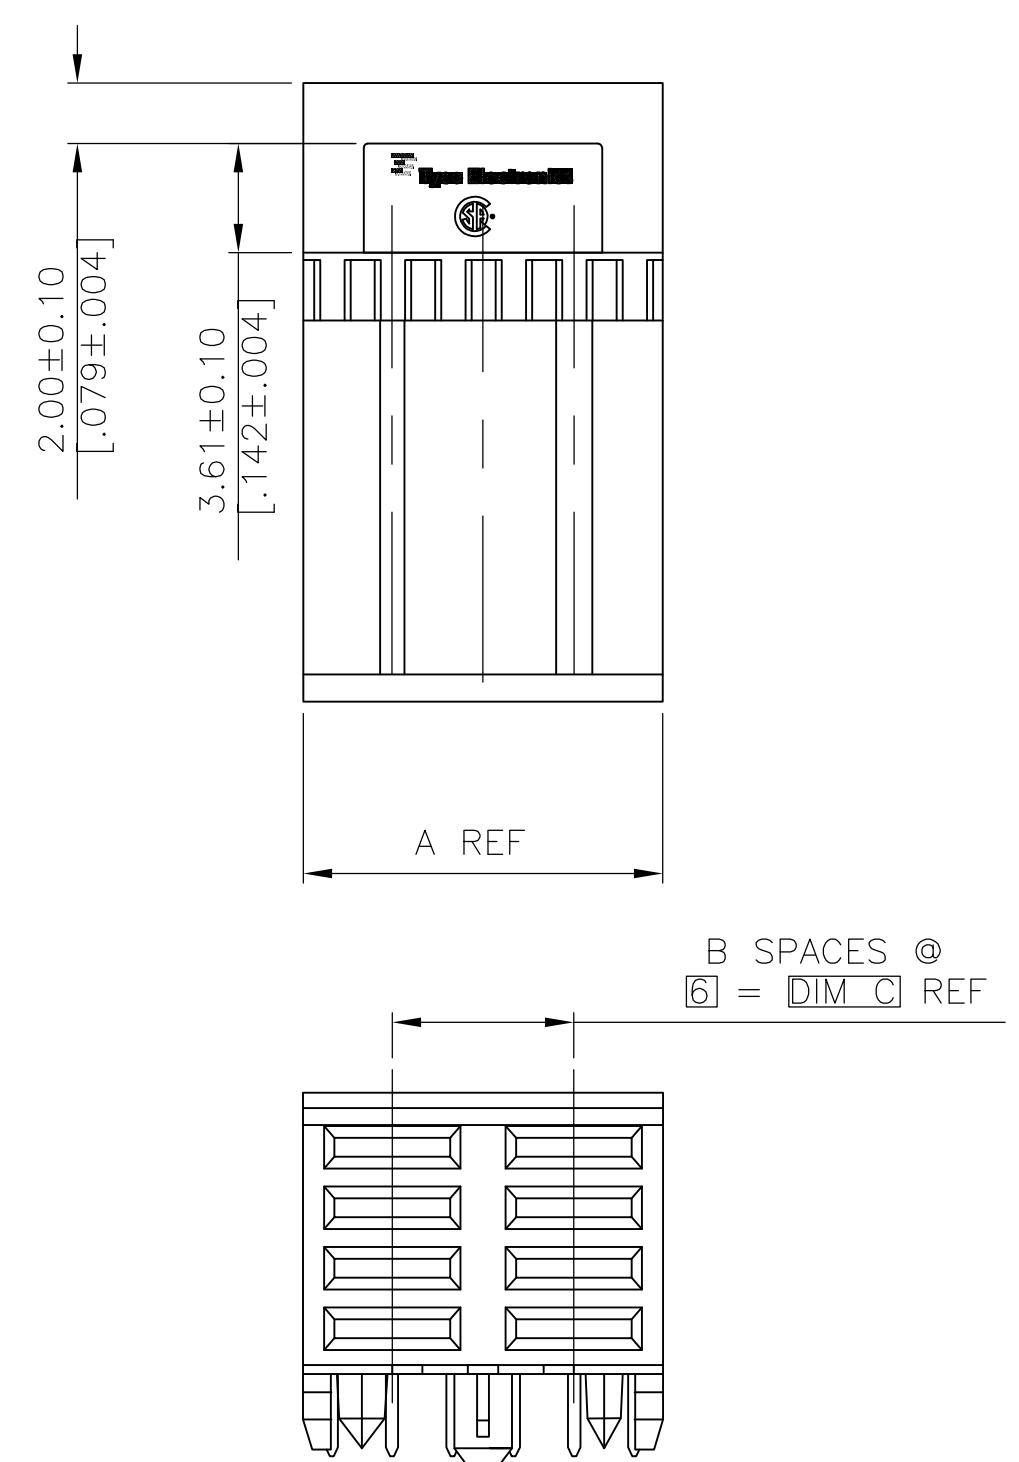


RECOMMENDED CIRCUIT PATTERN
PER IPC-D300 TYPE II, CLASS C
(COMPONENT SIDE)

- 1 HOUSING MATERIAL: LIQUID CRYSTAL POLYMER.
- 2 CONTACT MATERIAL: PHOSPHOR-BRONZE.
- 3 CONTACT FINISH:(D)
UNDERPLATE (ENTIRE CONTACT):
0.00127 MIN NICKEL PER SAE-AMS-QQ-N-290
ON MATING SURFACES:
FLASH GOLD PER ASTM B 488, OVER
0.00076 MIN PALLADIUM-NICKEL OVER UNDERPLATE, OR
0.00076 MIN GOLD [ER ASTM B 488 OVER UNDERPLATE.
ON LEADS:
0.00381 MIN MATTE TIN PER ASTM B 545 OVER UNDERPLATE.
LUBRICATION (MIN MATING SURFACES):
SURFACE CONDITIONER AFTER PLATING.

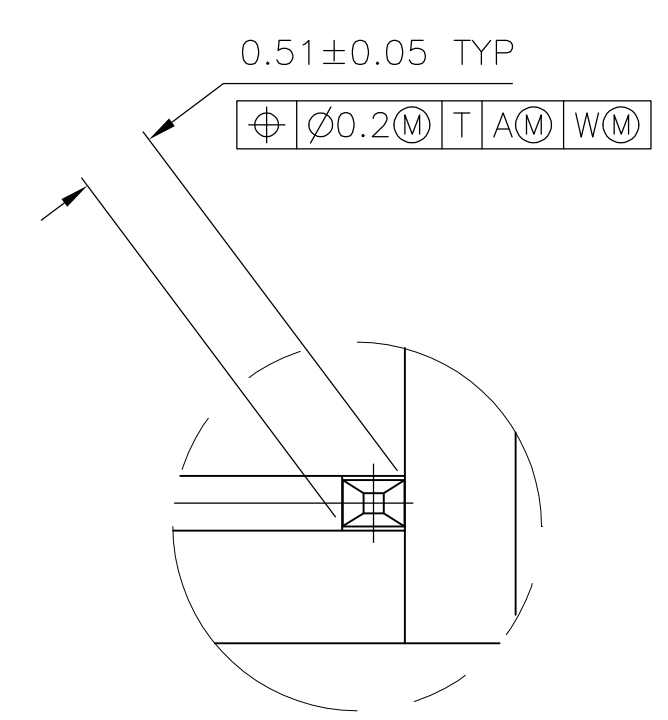

DETAIL Z
SCALE 20:1

10	5	6	1	11.88	△3	8	5536607-1
E	D	C	B	A	FINISH	NO OF POSN	PART NUMBER
THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN D.R.BENDER 08/10/92	 TE Connectivity		
				CHK S.HEADER 01/25/93			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD —	NAME Z-PACK 2mm FB, POWER MODULE, RCPT. ASS'Y. 4 ROW, 2.73 mm LEAD LENGTH		
		0 PLC	± —	PRODUCT SPEC		SIZE CASE CODE DRAWING NO A1 00779 ©=5536607	
		1 PLC	± —	—			
		2 PLC	± .13	APPLICATION SPEC			
		3 PLC	± —	—			
		4 PLC	± —				
		ANGLES				RESTRICTED TO —	
		FINISH		WEIGHT —			
MATERIAL  				CUSTOMER DRAWING			
				SCALE 4:1		SHEET 1 of 1	REV A3