

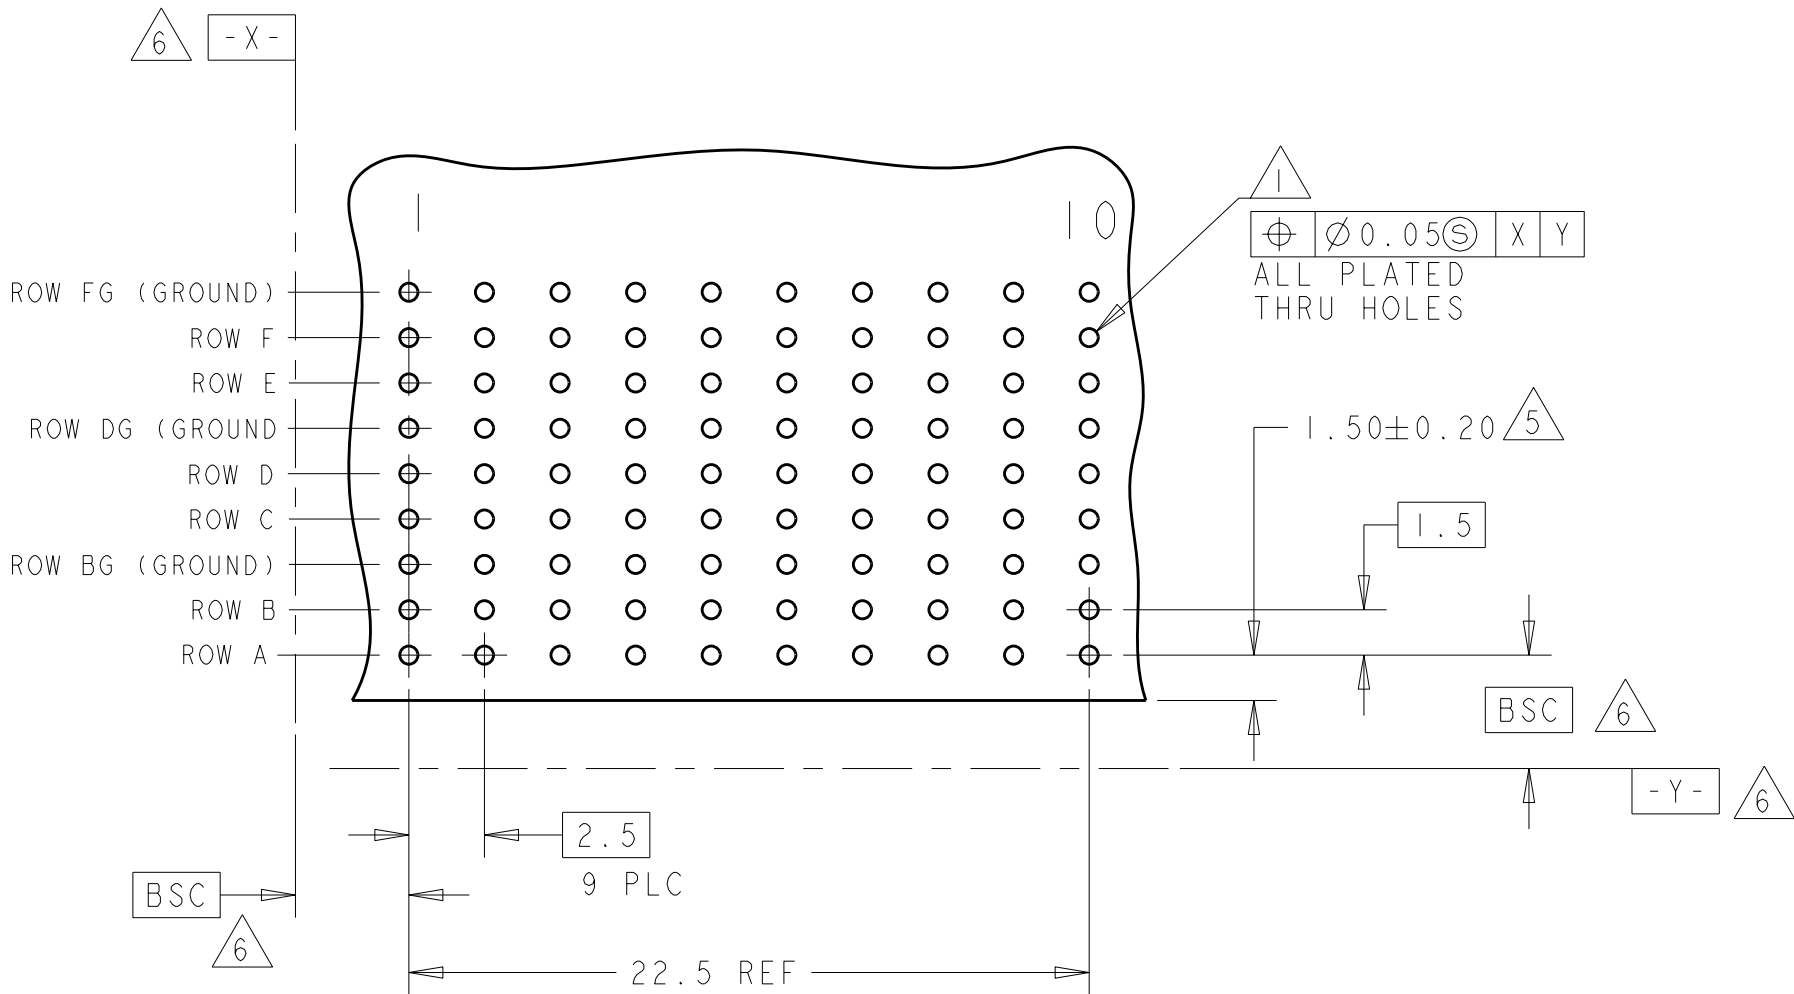


LOC		DIST		REVISIONS			
P	LYR	DESCRIPTION		DATE	DWN	APVD	
C		REV PER ECO-11-007577		13APR2011	RKC	JE	

- 1 PCB HOLE DIM:
DRILLED HOLE = 0.700±0.025mm
FINISHED HOLE = 0.600±0.050mm
Cu THICKNESS = 0.0375±0.0125mm
SnPb THICKNESS = 0.007±0.003mm
- 2 MATERIAL:
CONTACT & SHIELD - PHOSPHOR BRONZE
HOUSING & CHICKLET - GLASS FILLED POLYESTER
- 3 FINISH: SIGNAL AND GROUND CONTACTS:
MATING AREA: MEETS THE PERFORMANCE REQUIREMENTS OF
PRODUCT SPECIFICATION 108-2055; BASED ON TELCORDIA
GR-1217-CORE, APPLICATIONS IN UNCONTROLLED
ENVIRONMENTS
COMPLIANT PIN AREA: 0.5µm MIN BRIGHT
TIN-LEAD OVER BASE PLATING
- 4 CONNECTOR MARKED WITH PART NUMBER AND
DATE CODE IN APPROXIMATE AREA SHOWN
- 5 DIMENSION APPLIES TO CENTERLINE OF THRU HOLE
- 6 DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
7. CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT.
TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995

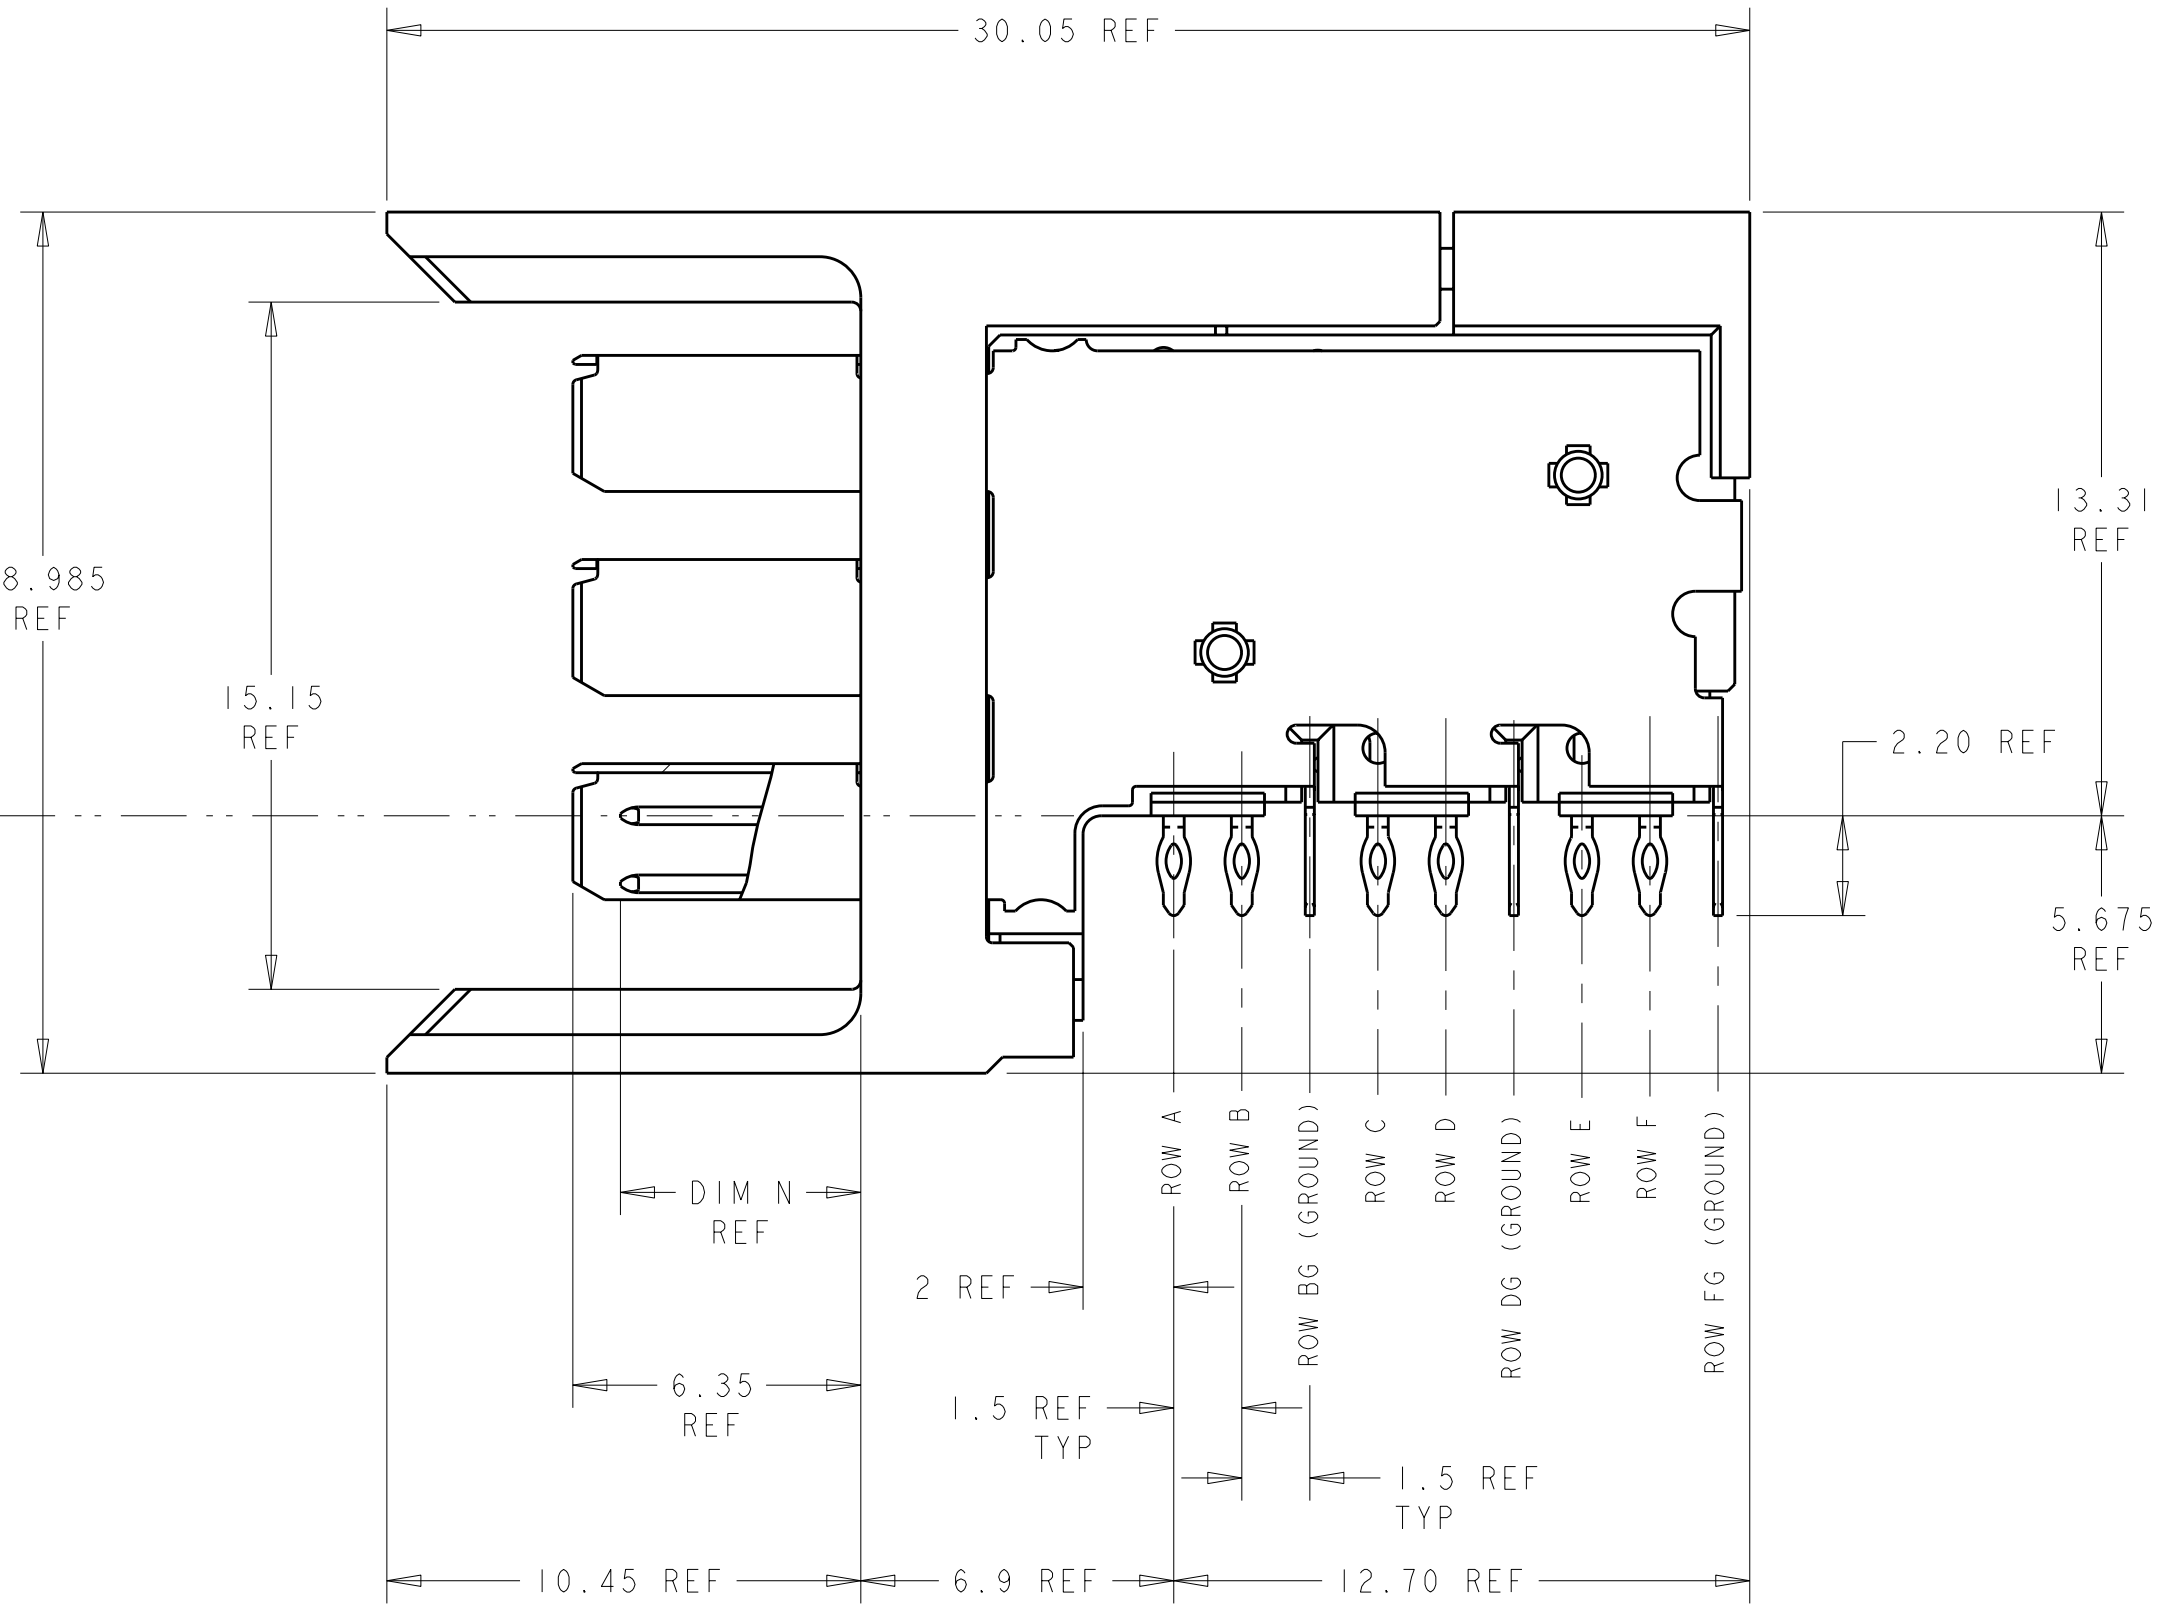

RECOMMENDED PC BOARD LAYOUT
COMPONENT SIDE SHOWN
SCALE 4:1

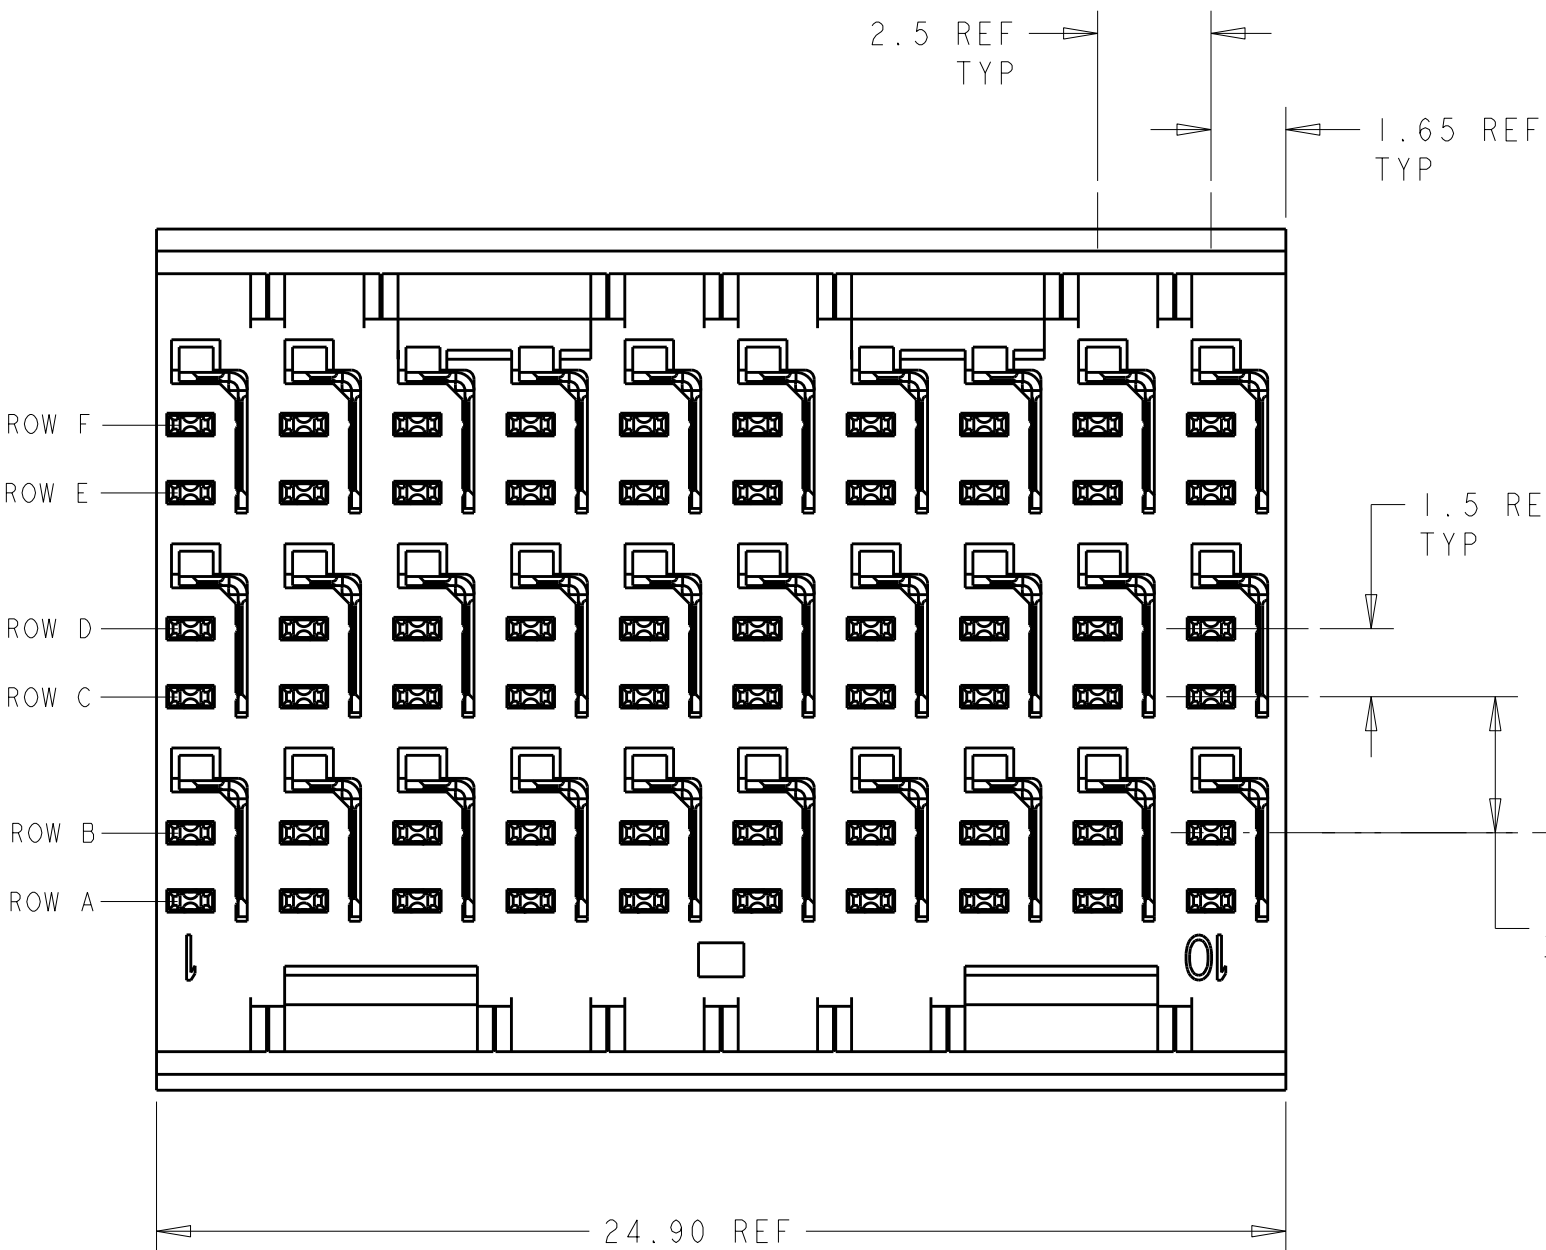

1469183-1
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. MAGARO 06JAN2004	TE Connectivity	
DIMENSIONS:		CHK D.S. SZCZESNY 06JAN2004		
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD -	NAME	
9 PLC ±	3 PLC ±	PRODUCT SPEC	HEADER ASSEMBLY, RIGHT ANGLE, 3 PAIR, HMZd	
5 PLC ±	4 PLC ±	APPLICATION SPEC		
MATERIAL	FINISH	WEIGHT	SIZE	CAGE CODE
2	3	-	A100779	C=1469183
CUSTOMER DRAWING		SCALE 6:1	SHEET 1	REV C