
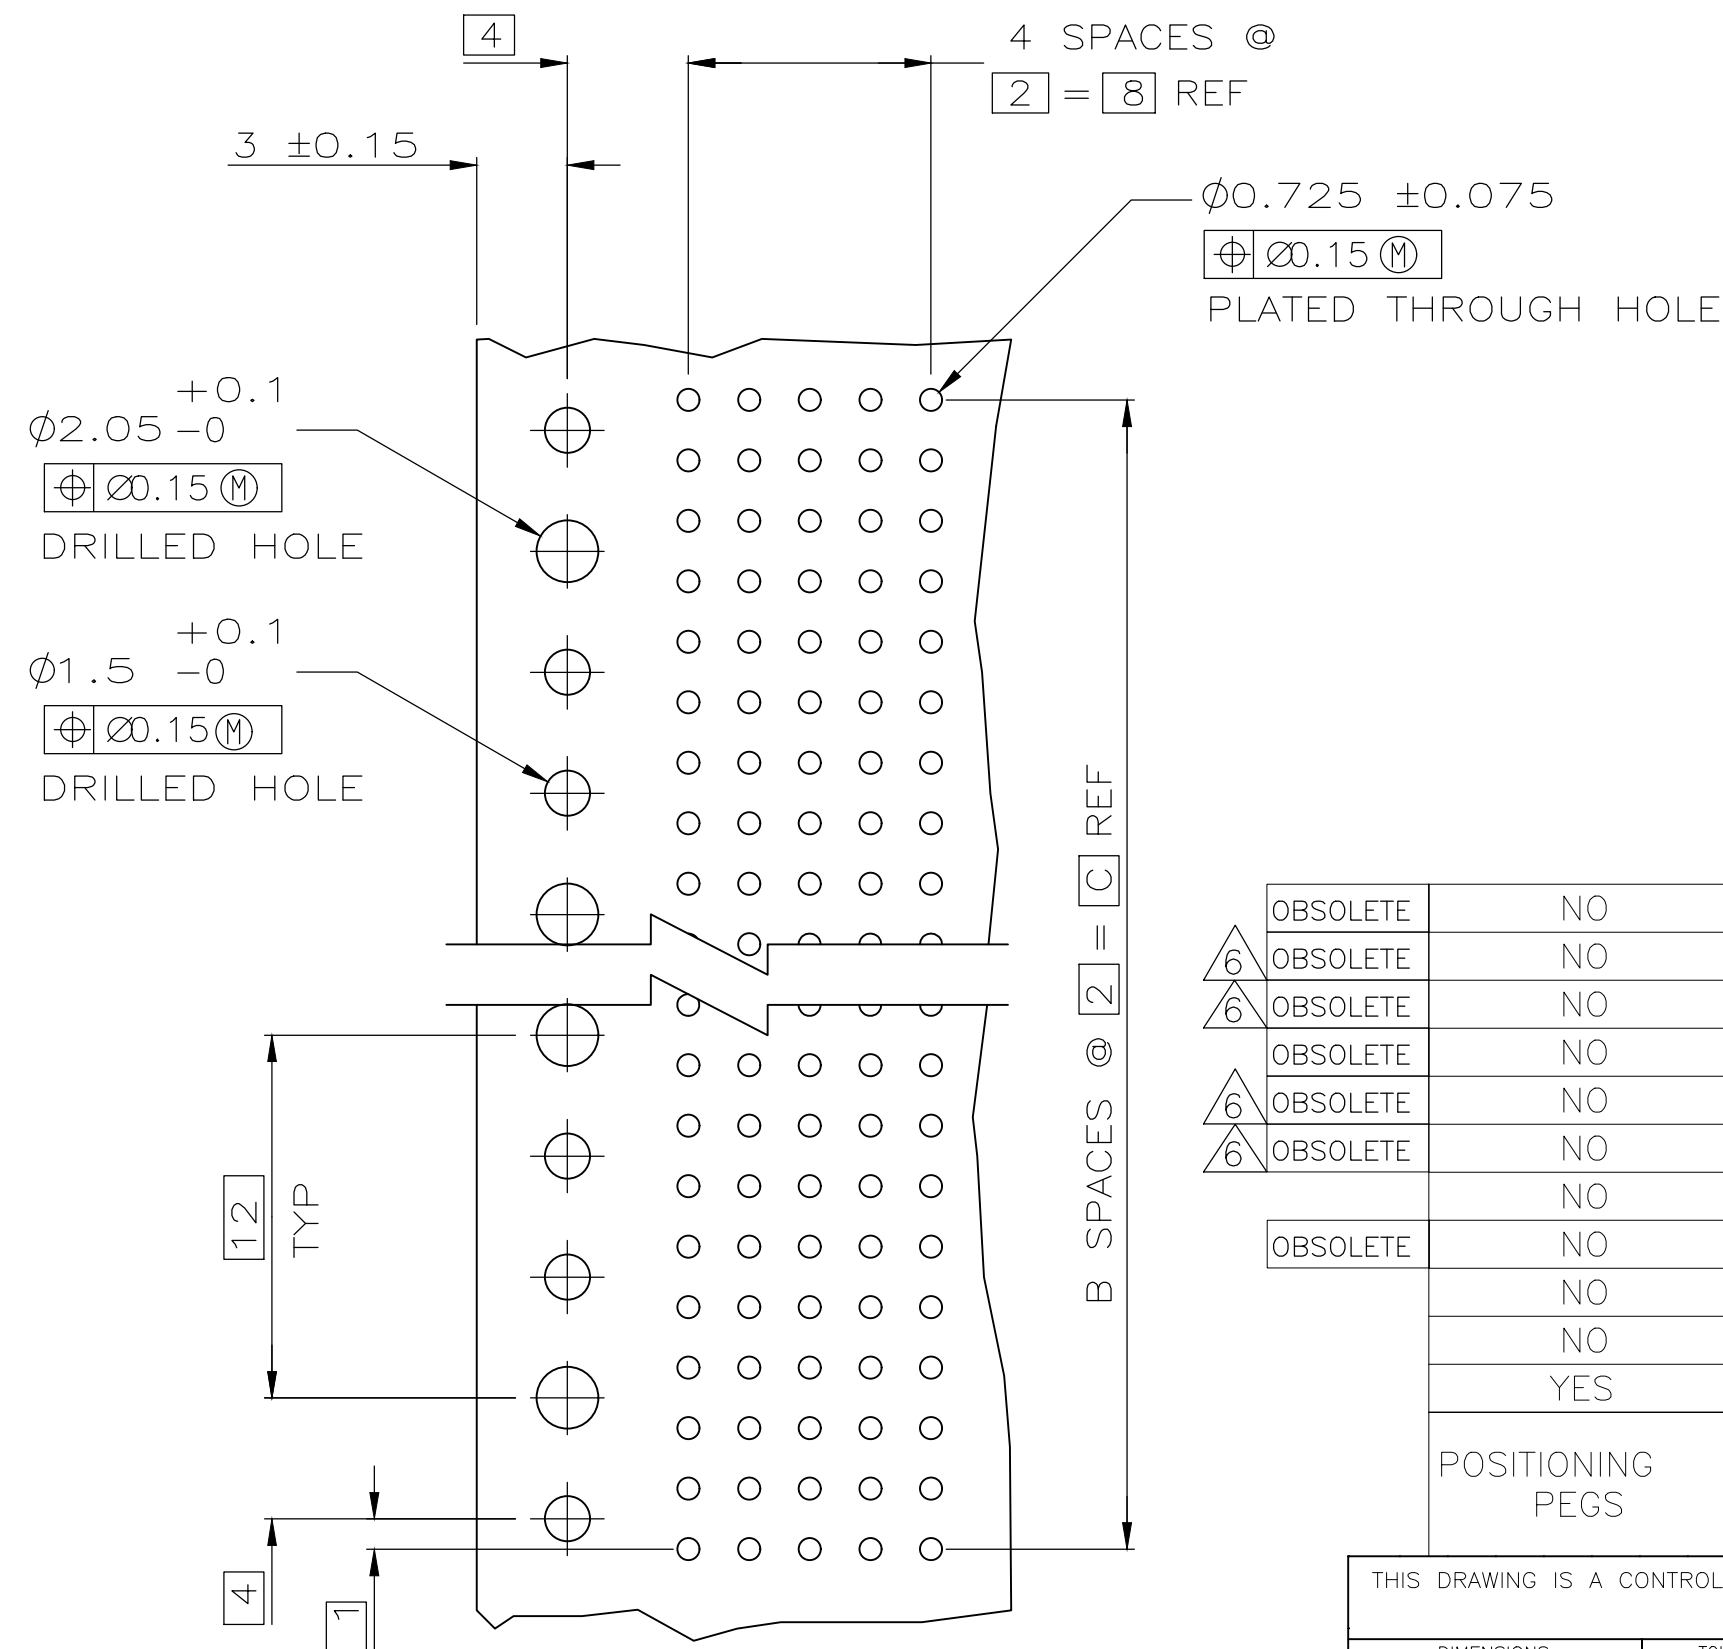
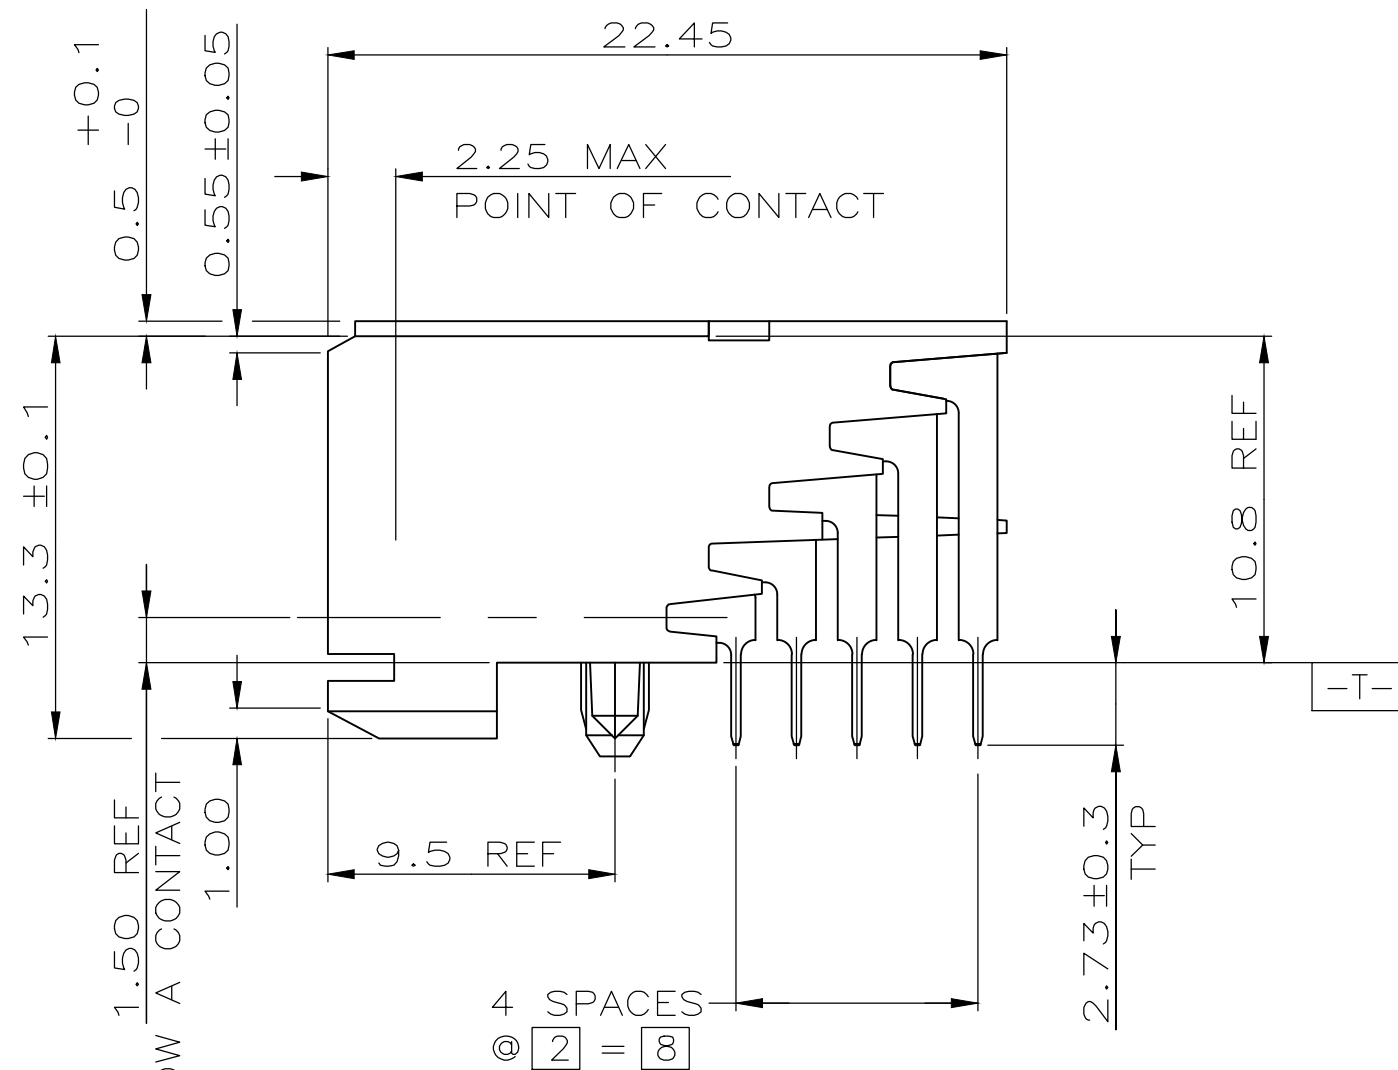
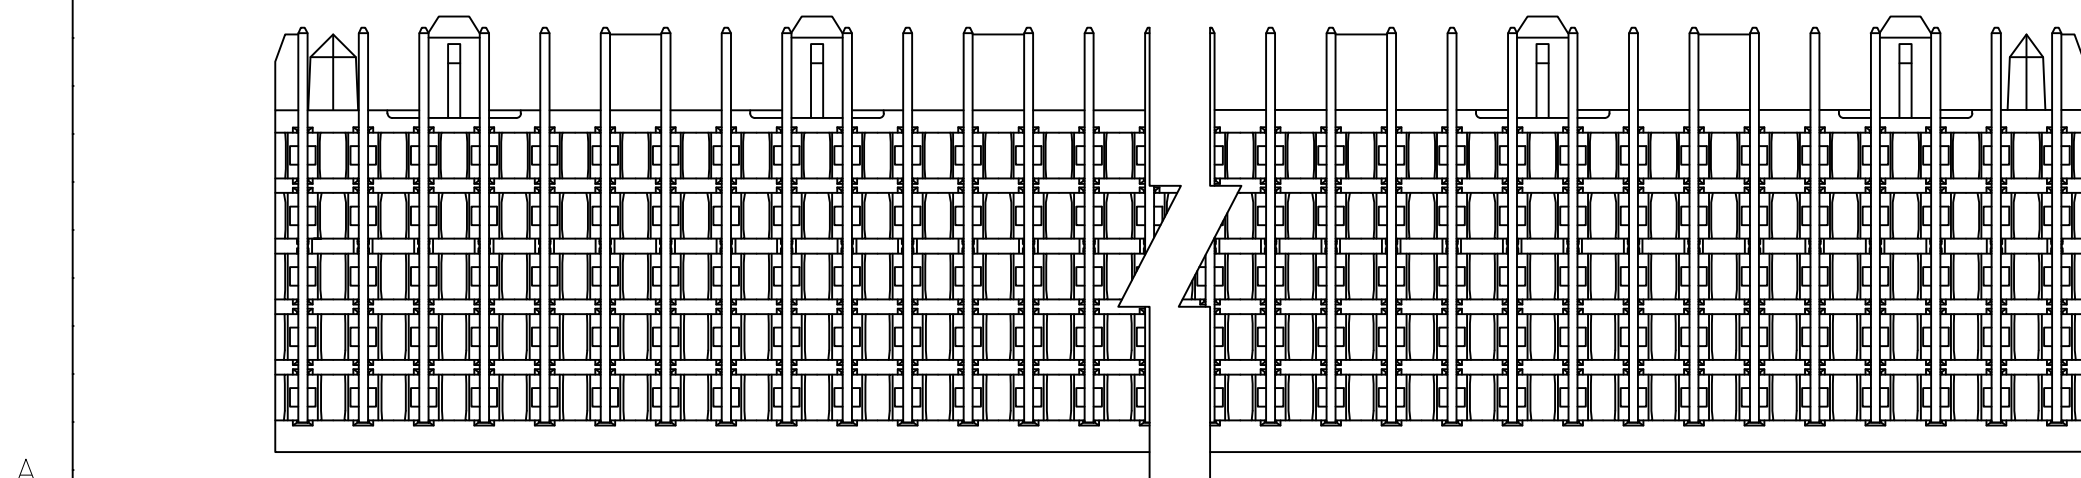
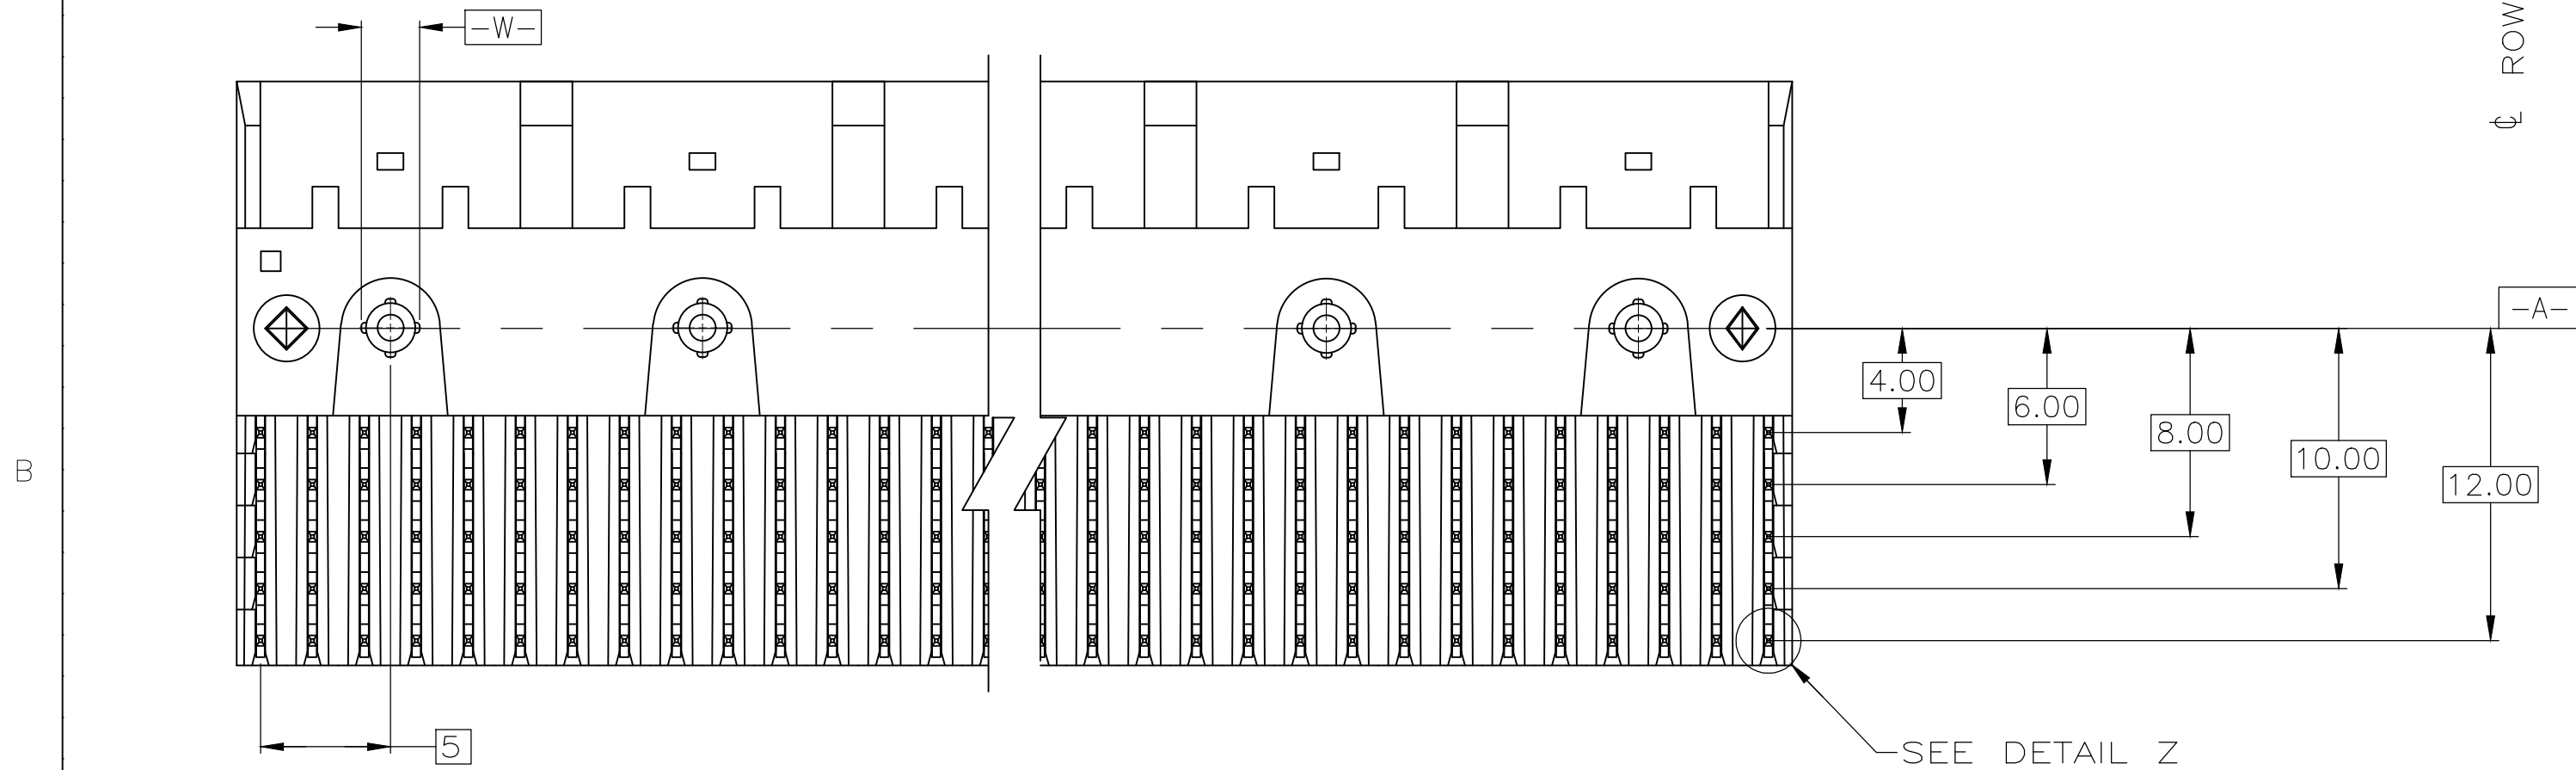
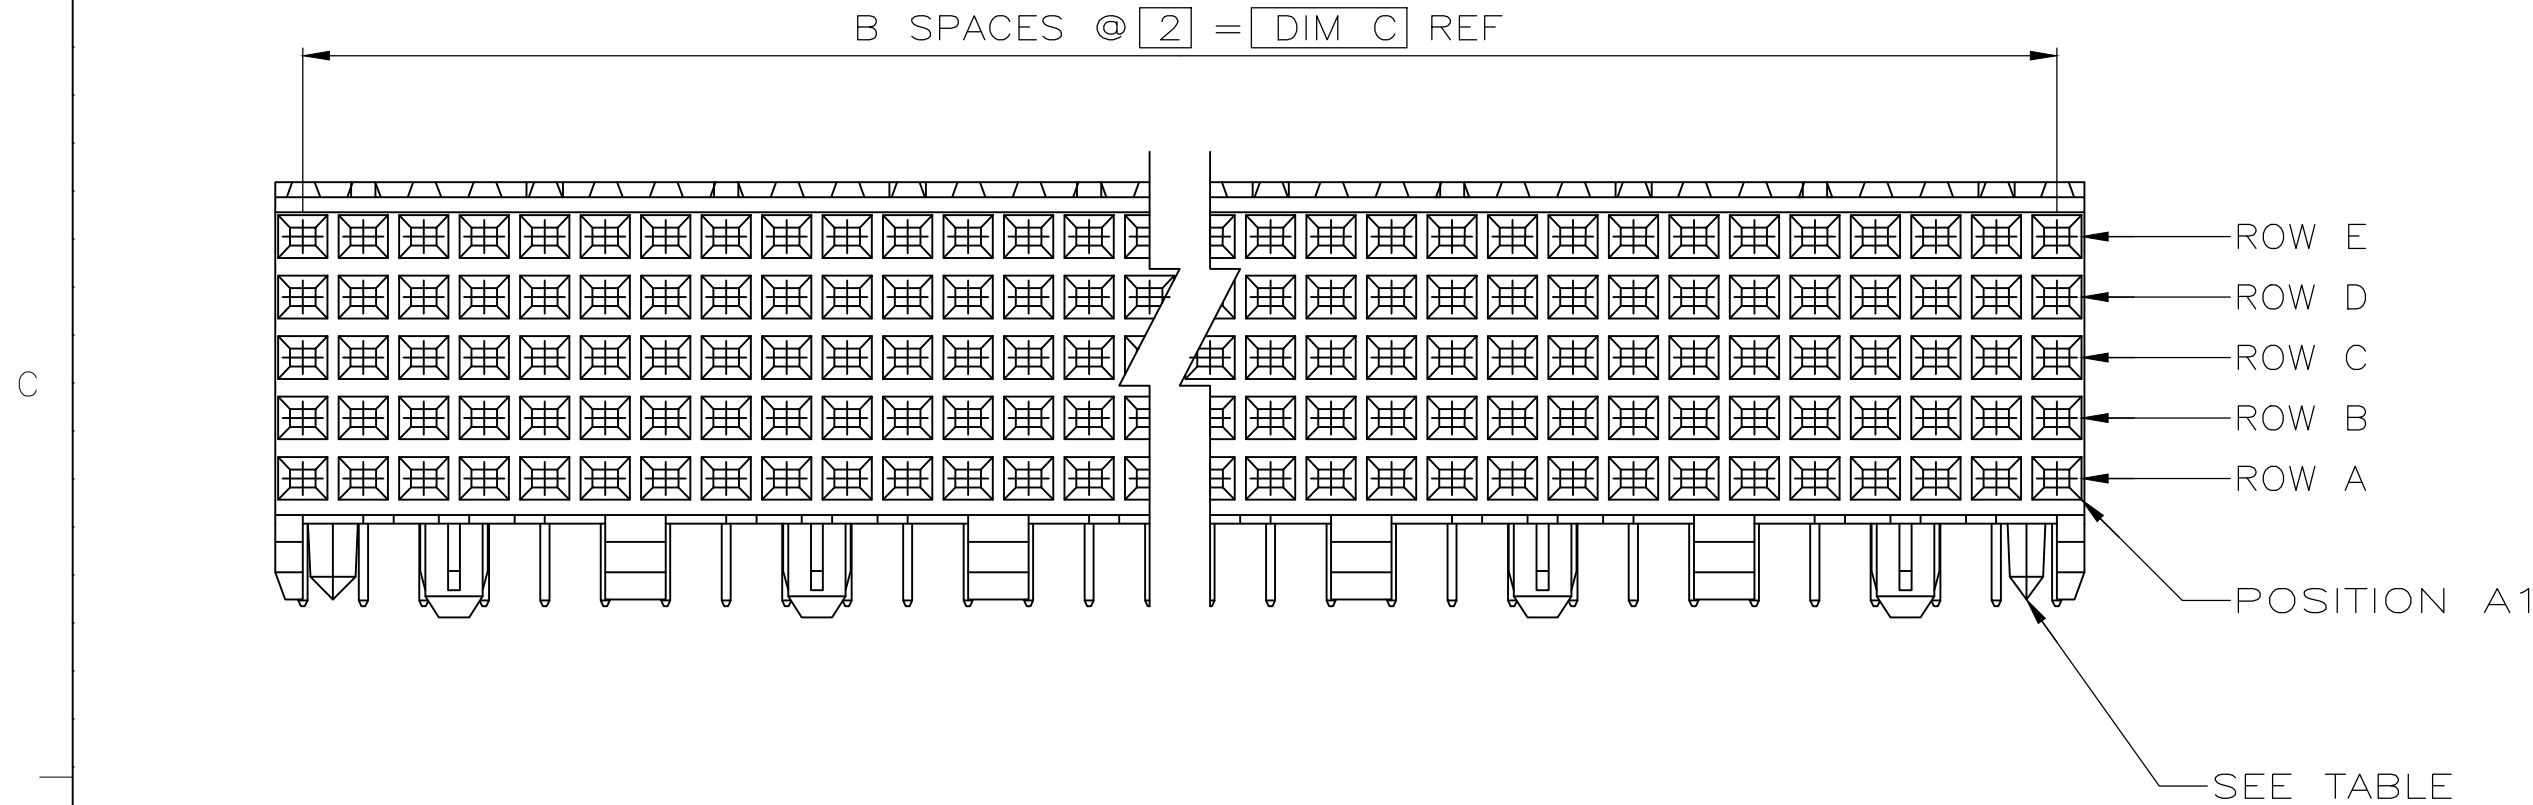


D

C


B

A

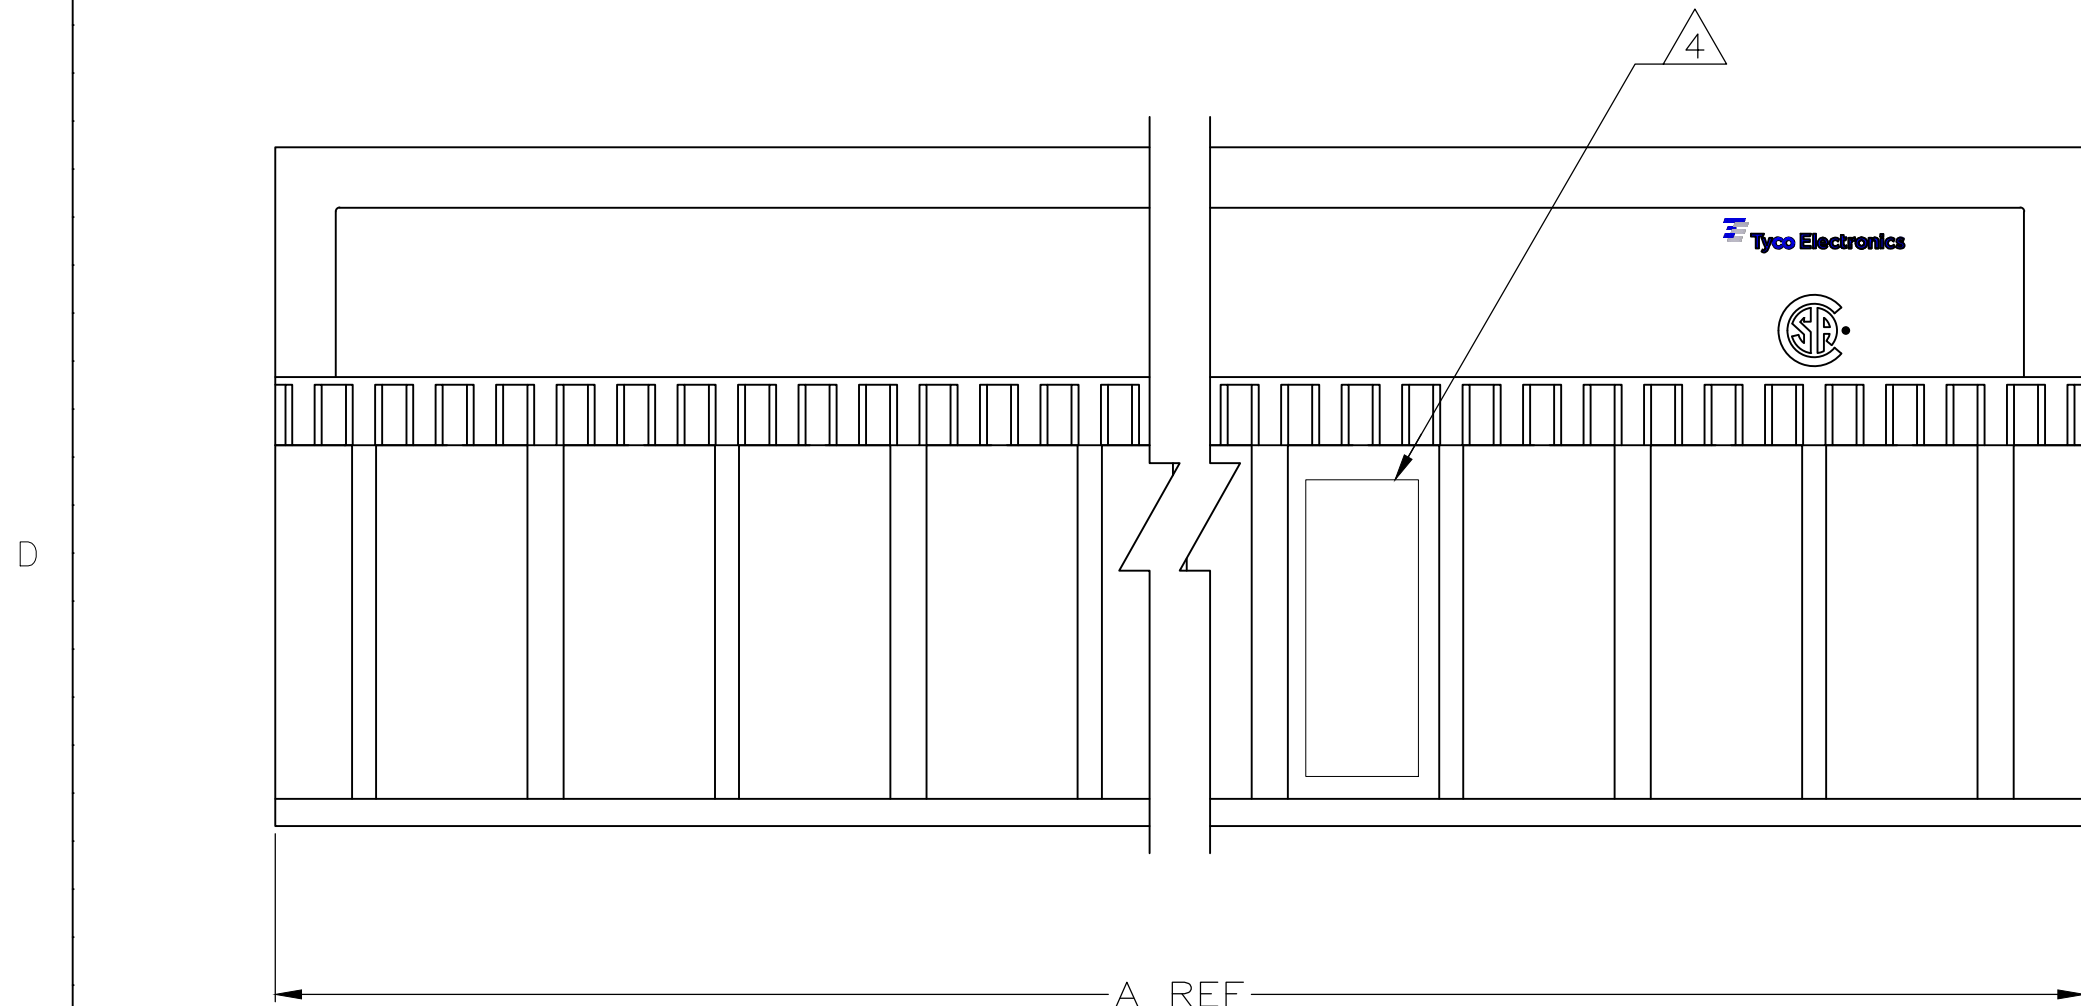

RECOMMENDED CIRCUIT PATTERN
PER IPC-D300 TYPE II, CLASS C
(COMPONENT SIDE)

- 1 HOUSING MATERIAL: LIQUID CRYSTAL POLYMER
COLOR: NATURAL.
- 2 CONTACT MATERIAL: PHOSPHOR-BRONZE.
- 3 CONTACT FINISH:
UNDERPLATE (ENTIRE CONTACT):
0.00127 MIN NICKEL.
ON MATING SURFACES:
CONFORMS TO ALL TESTING SPECIFIED FOR TELCORDIA
UNCONTROLLED ENVIRONMENT.
ON LEADS
0.00381 MIN TIN-LEAD OVER UNDERPLATE.
LUBRICATION (ENTIRE CONTACT):
SURFACE CONDITIONER PER AMP SPEC 112-1002 AFTER PLATING.
- 4 PART MARKING LOCATED APPROXIMATELY AS SHOWN.
- 6 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

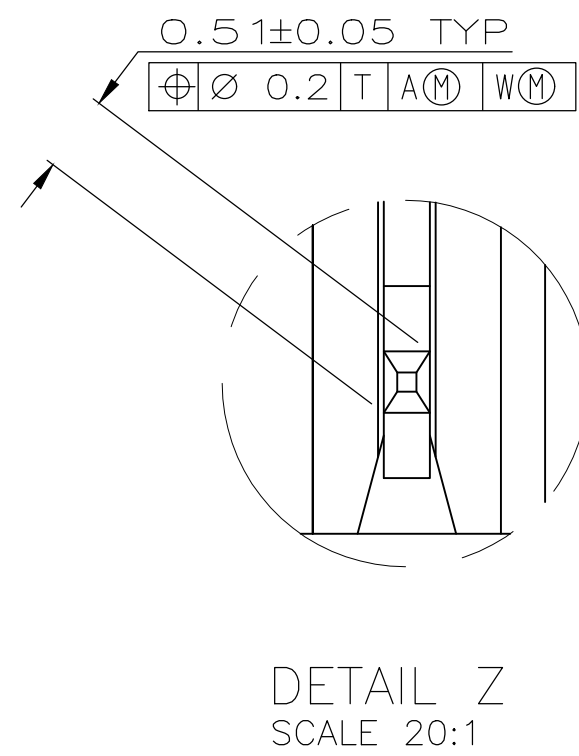

OBSOLETE	NO	130	65	131.88	3	330	1-223004-1
OBSOLETE	NO	118	59	119.88	3	300	1-223004-0
OBSOLETE	NO	106	53	107.88	3	270	223004-9
OBSOLETE	NO	94	47	95.88	3	240	223004-8
OBSOLETE	NO	82	41	83.88	3	210	223004-7
OBSOLETE	NO	70	35	71.88	3	180	223004-6
OBSOLETE	NO	58	29	59.88	3	150	223004-5
OBSOLETE	NO	46	23	47.88	3	120	223004-4
OBSOLETE	NO	34	17	35.88	3	90	223004-3
OBSOLETE	NO	22	11	23.88	3	60	223004-2
OBSOLETE	YES	10	3	11.88	3	30	223004-1
POSITIONING PEGS		C	B	A	FINISH	NO. OF SIGNAL POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. BUCHHEISTER 07/FEB/96	TE Connectivity	
DIMENSIONS: mm		CHK D. BAECHTLE 08/FEB/96	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D. SINISI 08/FEB/96	ASSEMBLY, RECEPTACLE, SIGNAL, RIGHT ANGLE, Z-PACK 2mm FB, 5 ROW, SOLDER LEAD	
0 PLC ± -		PRODUCT SPEC	APPLICATION SPEC	
1 PLC ± -		APPLICATION SPEC	SIZE	
2 PLC ± 0.13		APPLICATION SPEC	CAGE CODE	
3 PLC ± -		APPLICATION SPEC	DRAWING NO	
4 PLC ± -		APPLICATION SPEC	RESTRICTED TO	
ANGLES ± -		APPLICATION SPEC	WEIGHT	
FINISH		APPLICATION SPEC	0.000000	
MATERIAL		APPLICATION SPEC	A1 00779	
FINISH		APPLICATION SPEC	C=223004	
1 2		APPLICATION SPEC	CUSTOMER DRAWING	
3 5		APPLICATION SPEC	SCALE 4:1	
		APPLICATION SPEC	SHEET 1 OF 1	
		APPLICATION SPEC	REV M3	