


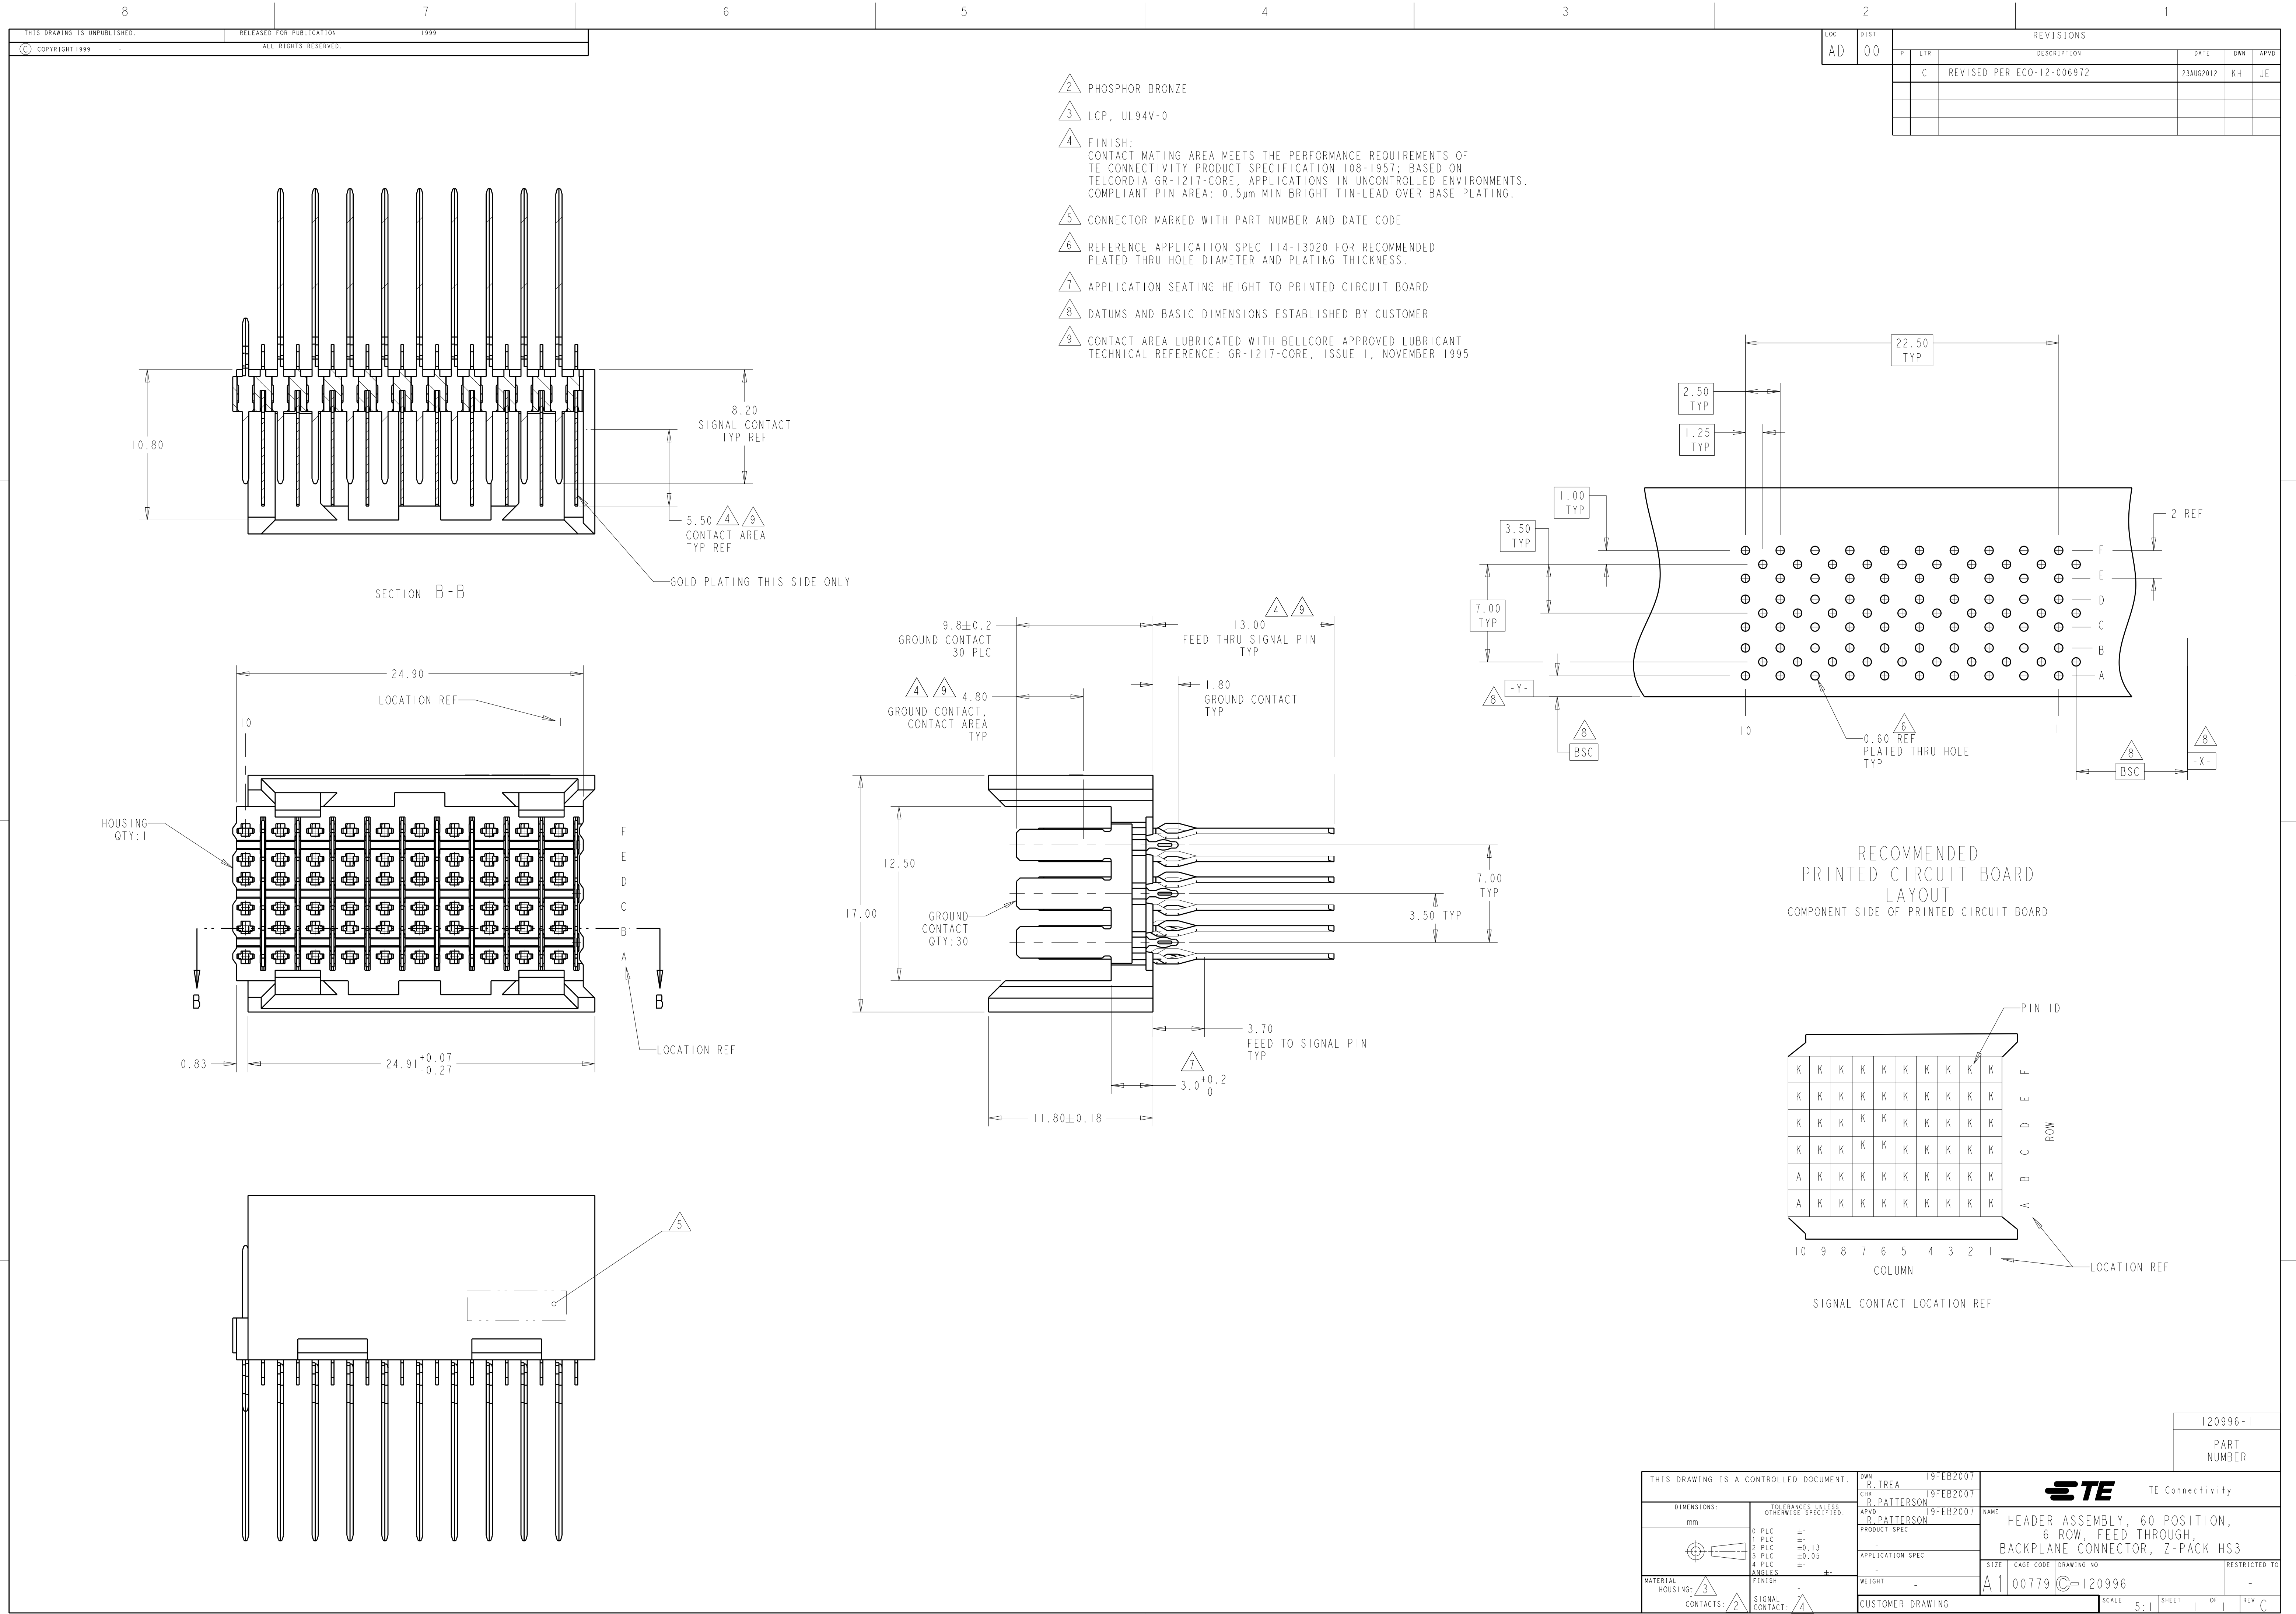


- 2 PHOSPHOR BRONZE
- 3 LCP, UL94V-0
- 4 FINISH:
CONTACT MATING AREA MEETS THE PERFORMANCE REQUIREMENTS OF
TE CONNECTIVITY PRODUCT SPECIFICATION 108-1957; BASED ON
TELCORDIA GR-1217-CORE; APPLICATIONS IN UNCONTROLLED ENVIRONMENTS.
COMPLIANT PIN AREA: 0.5µm MIN BRIGHT TIN-LEAD OVER BASE PLATING.
- 5 CONNECTOR MARKED WITH PART NUMBER AND DATE CODE
- 6 REFERENCE APPLICATION SPEC 114-13020 FOR RECOMMENDED
PLATED THRU HOLE DIAMETER AND PLATING THICKNESS.
- 7 APPLICATION SEATING HEIGHT TO PRINTED CIRCUIT BOARD
- 8 DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- 9 CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT
TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995

LOC		DIST		REVISES			
AD		00		P	LTR	DESCRIPTION	DATE
				C		REVISED PER ECO-12-006972	23AUG2012

RECOMMENDED
PRINTED CIRCUIT BOARD
LAYOUT

COMPONENT SIDE OF PRINTED CIRCUIT BOARD

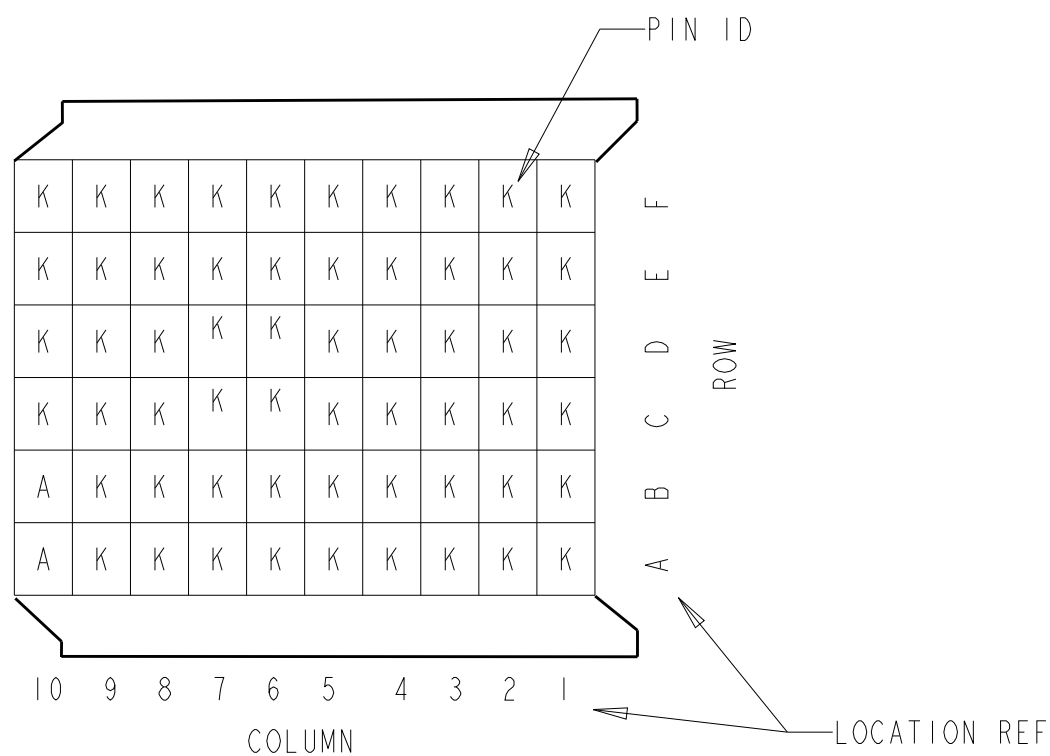

SIGNAL CONTACT LOCATION REF

THIS DRAWING IS A CONTROLLED DOCUMENT.				OWN: R. TREA 19FEB2007				120996-1			
				CHK: R. PATTERSON 19FEB2007				PART NUMBER			
				APVD: R. PATTERSON 9FEB2007							
				PRODUCT SPEC							
				APPLICATION SPEC							
				WEIGHT							
				CUSTOMER DRAWING							
				SIZE: A1							
				CAGE CODE: 00779							
				DRAWING NO: 120996							
				SHEET 1 OF 1							
				REV C							