

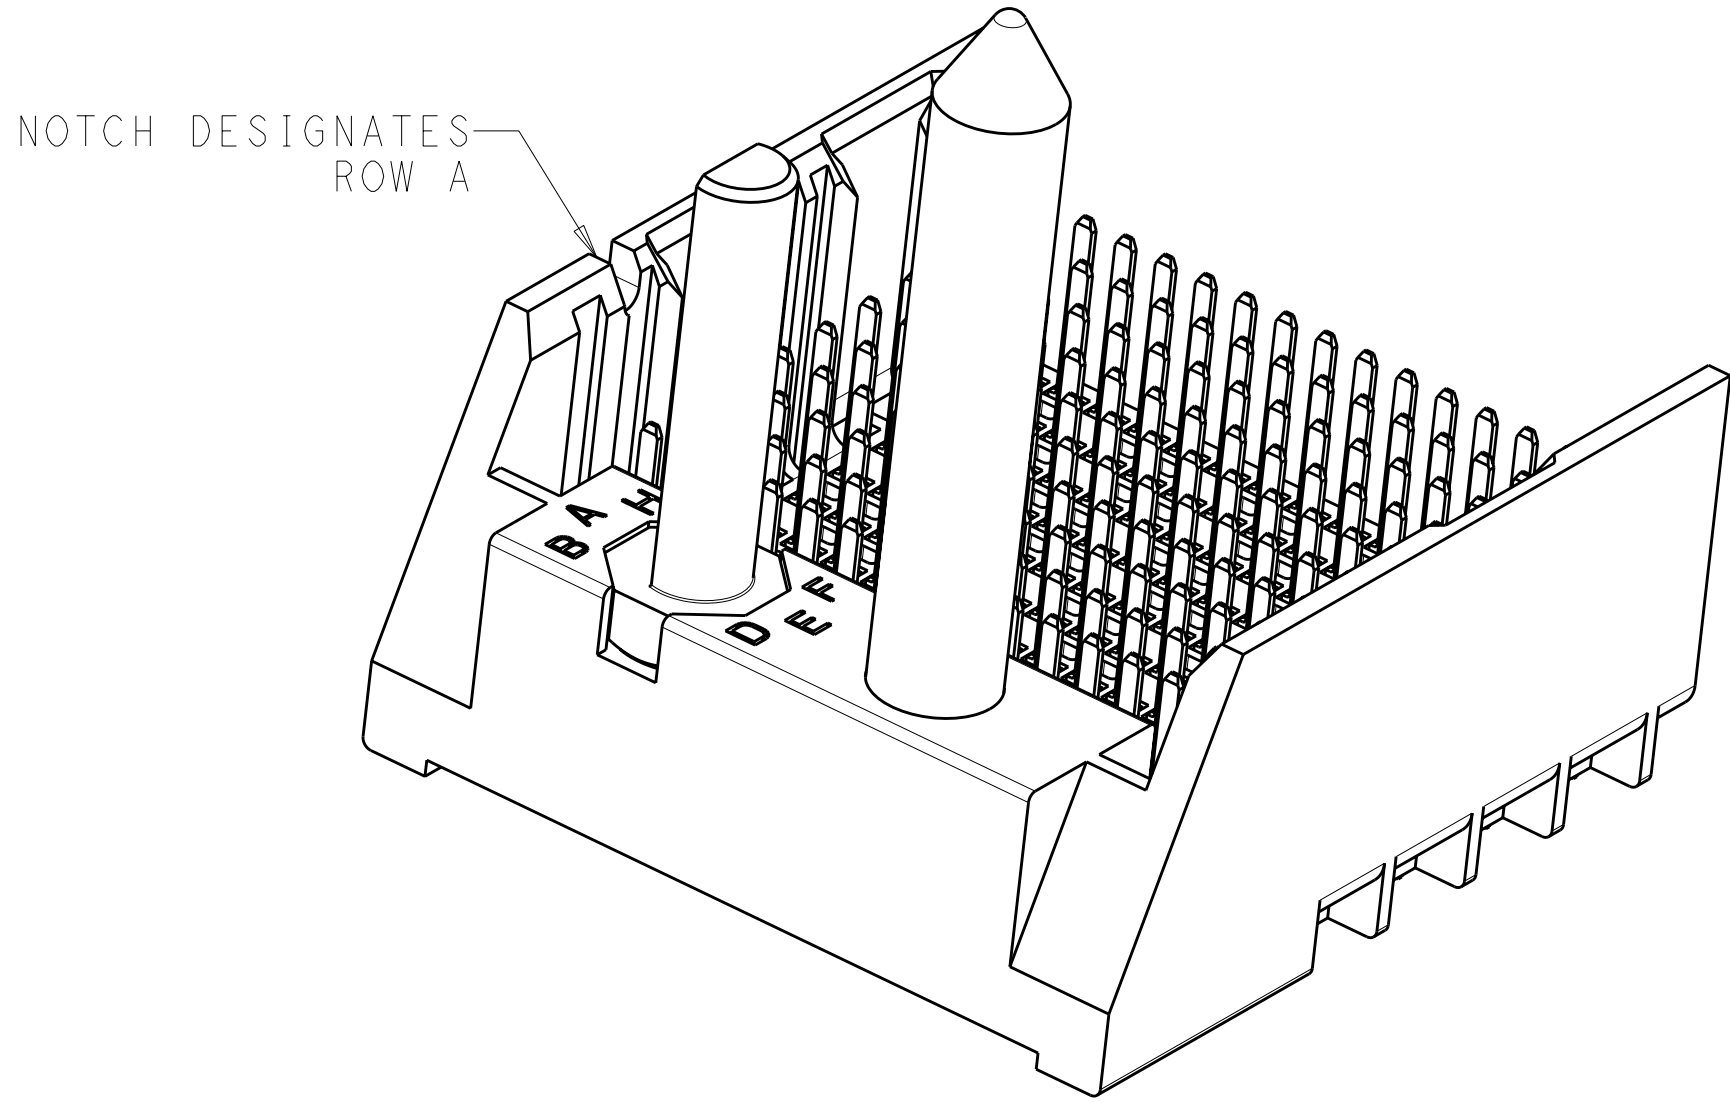
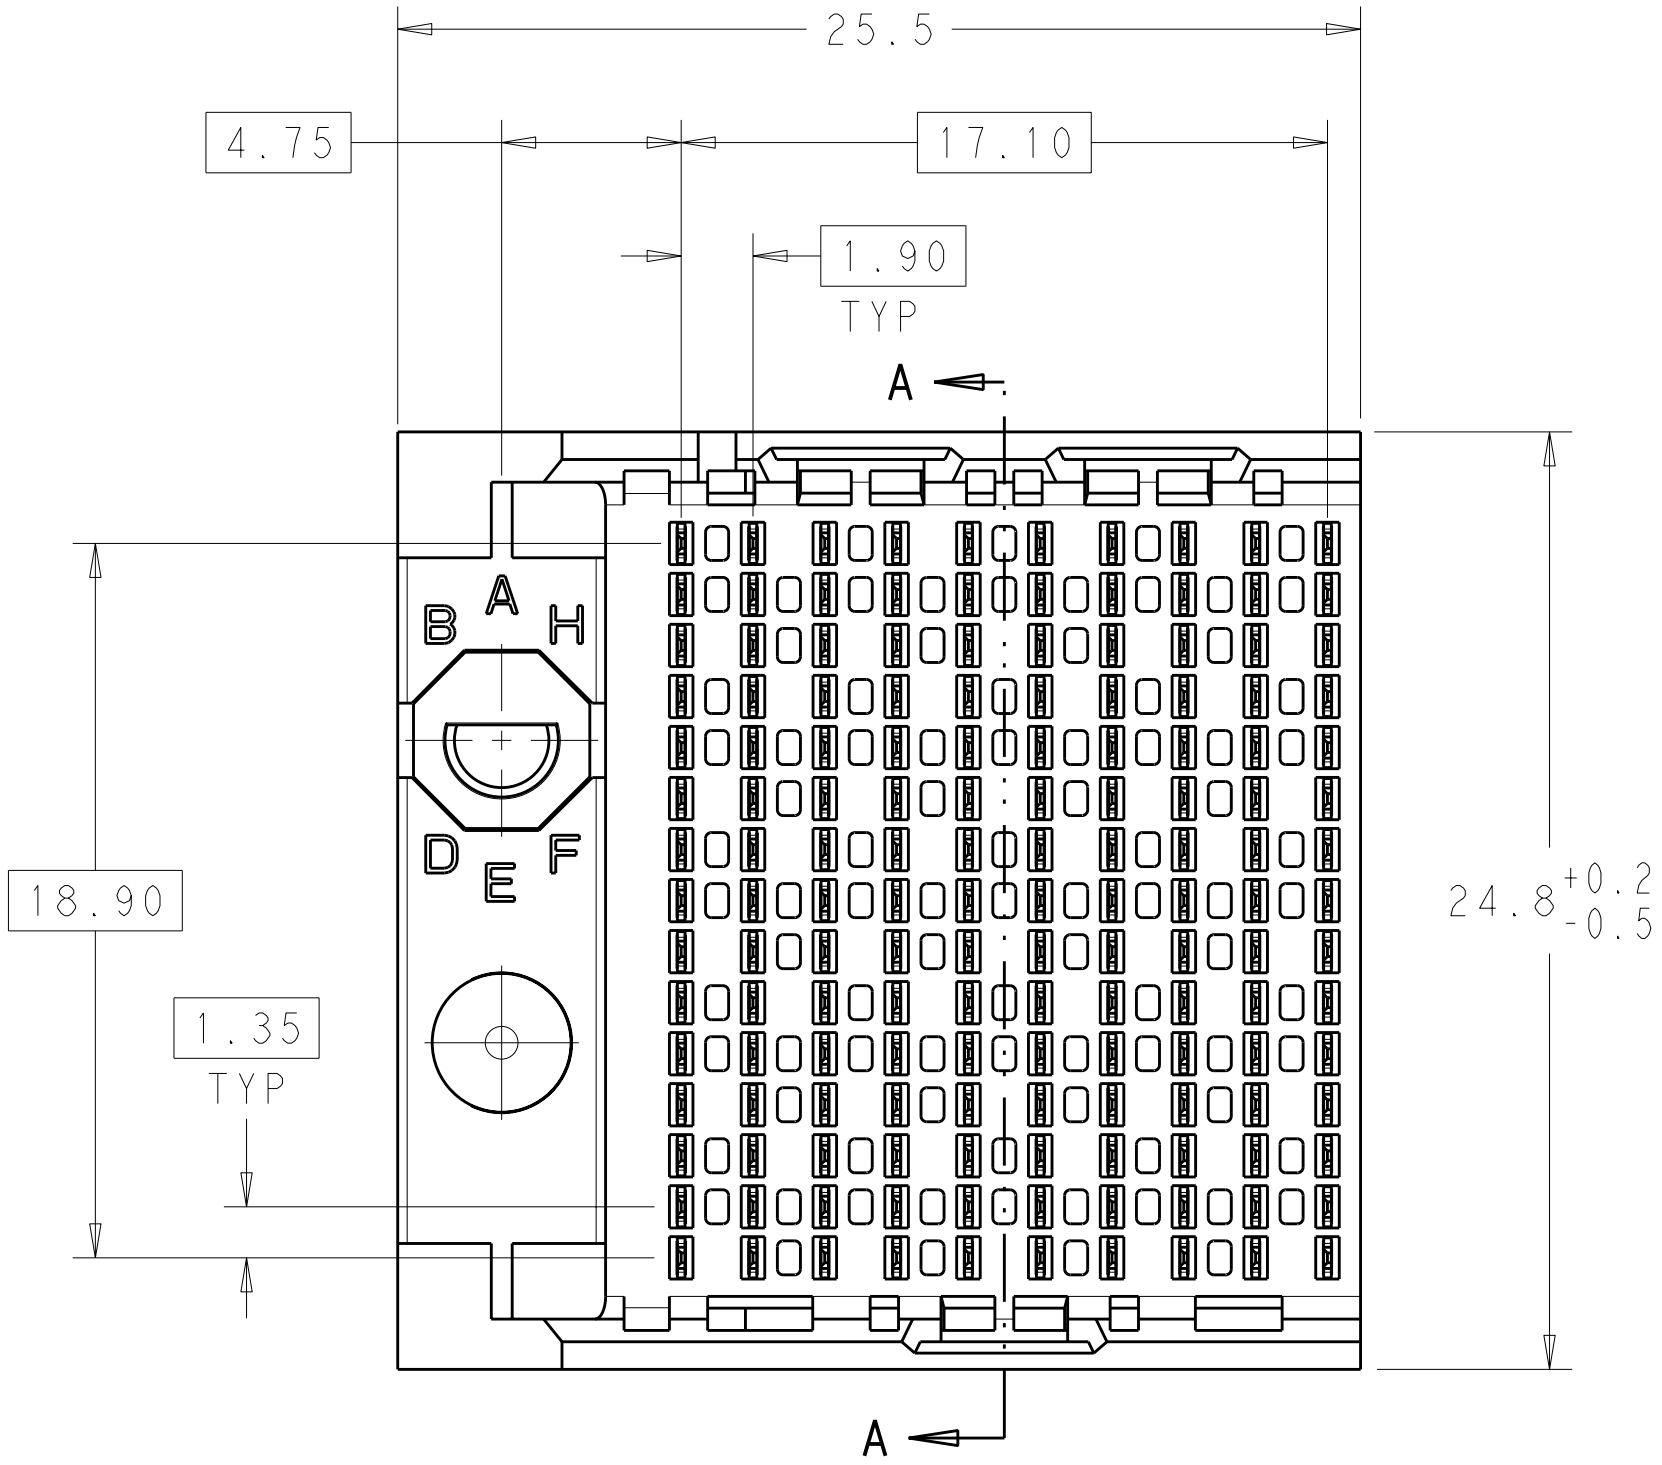
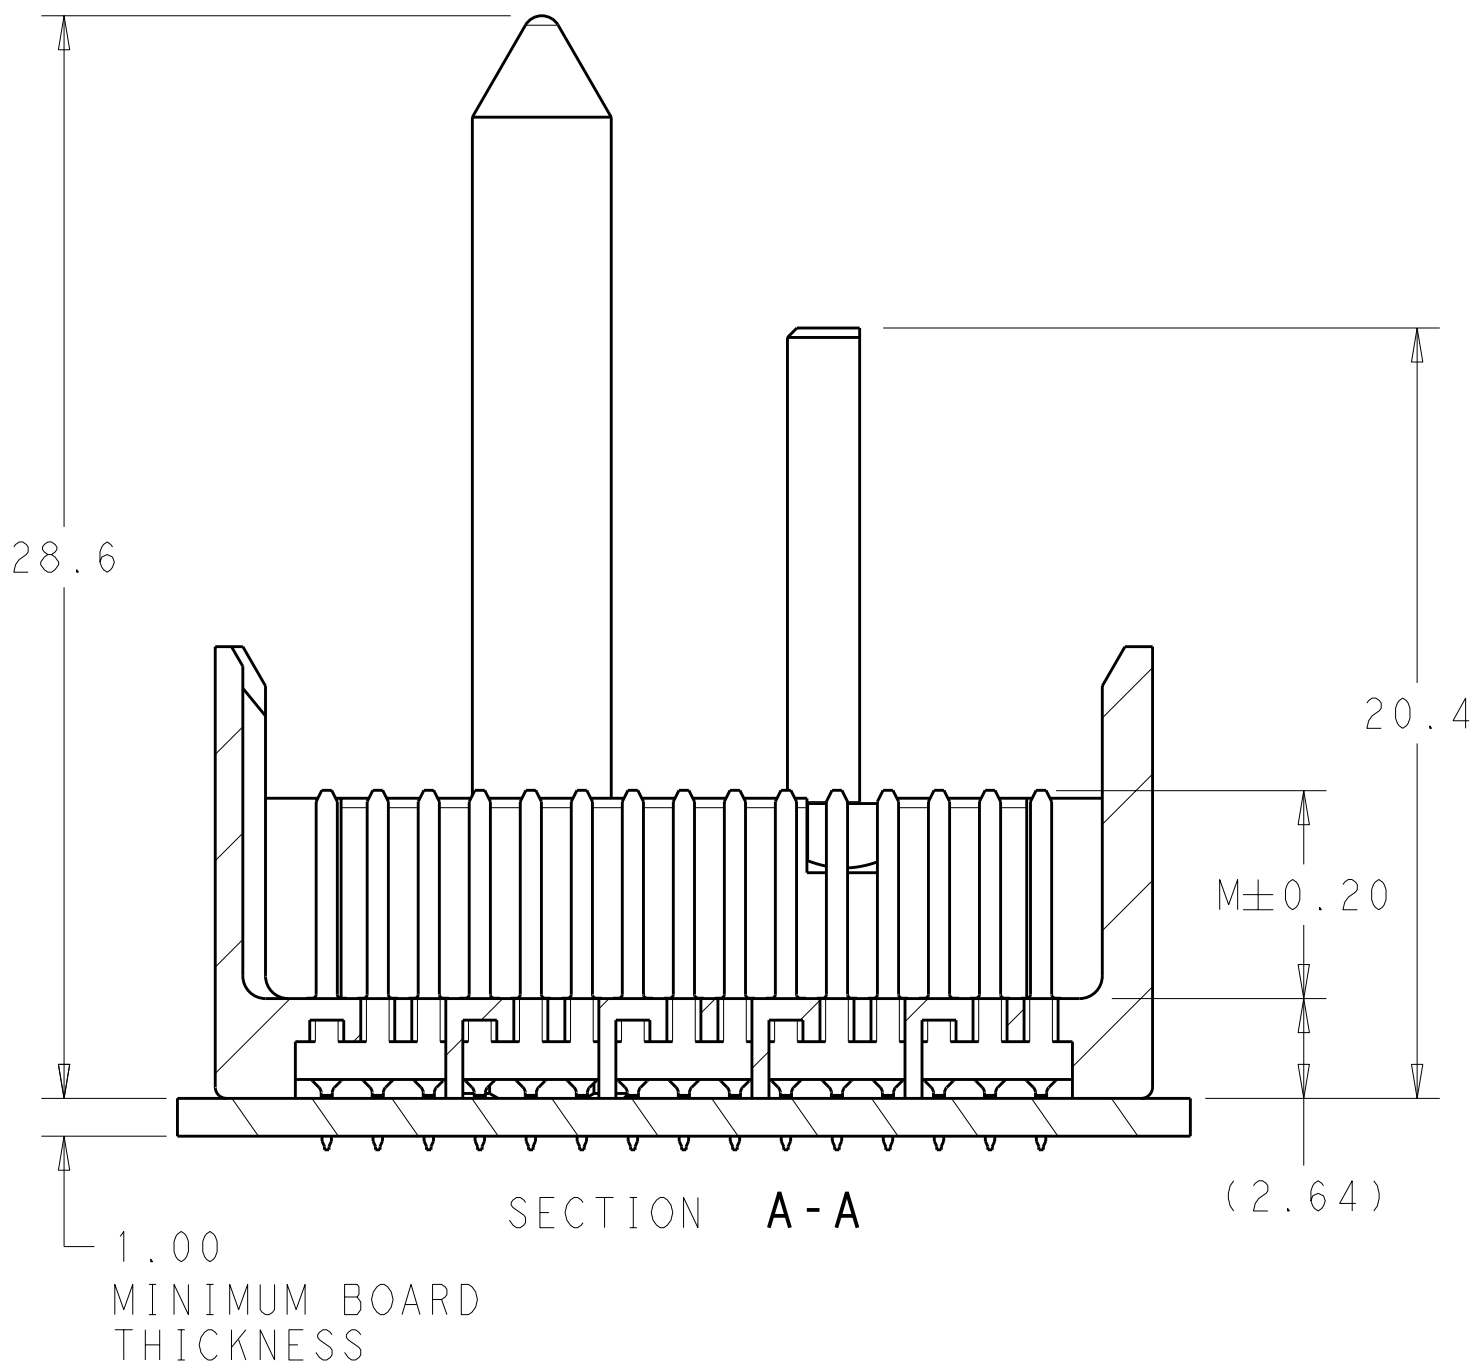


LOC		DIST		REVISIONS					
AD		00		REV	LYR	DESCRIPTION	DATE	DWN	APVD
				1		DRAWING CREATED BY AUTOMATION PROGRAM	24FEB2011	JKS	JE
				A		RELEASED	24FEB2012	BC	DY

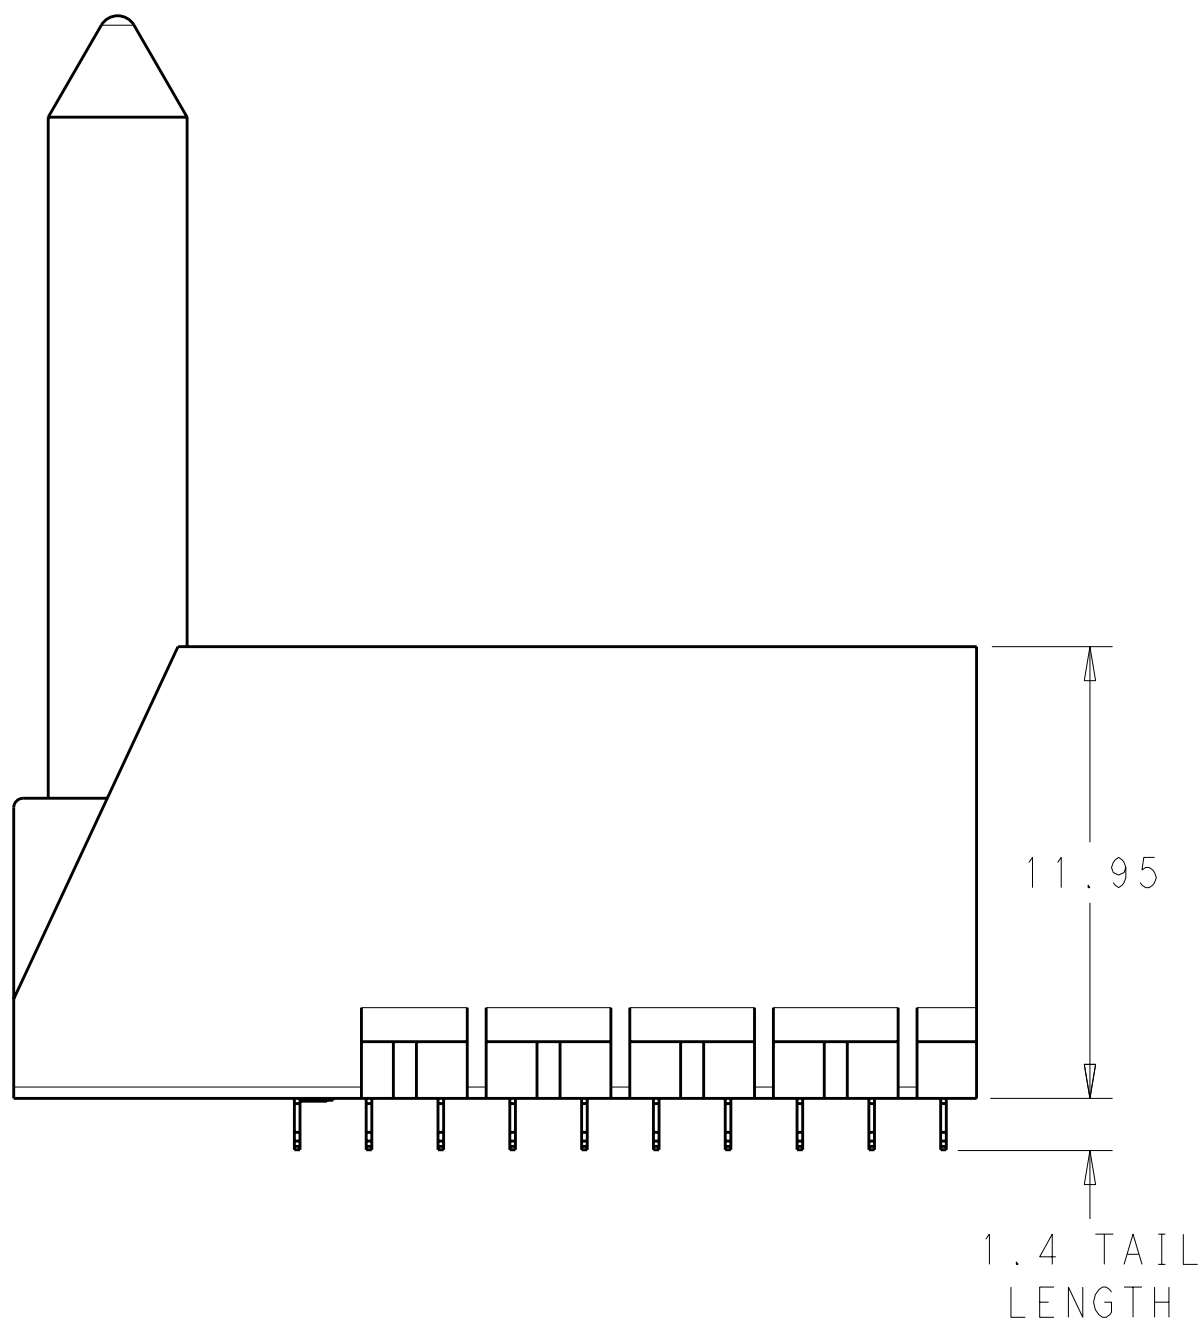


- 1 MATERIAL:
HOUSING: LCP, GLASS FILLED, UL94V-0.
TERMINALS: HIGH PERFORMANCE COPPER ALLOY.
- 2 FINISH:
30μ" MIN GOLD IN CONTACT AREA. SELECTIVE TIN
ON PCB TAILS, NICKEL OVERALL.
- 3 FINISH:
30μ" MIN GOLD IN CONTACT AREA. SELECTIVE TIN-LEAD
ON PCB TAILS, NICKEL OVERALL.
4. SCREWS PACKAGED IN END OF PACKAGING TUBE.
- 5 FOR GROUNDED GUIDE PIN USE Ø3.56±0.08 PTH,
Ø3.66 DRILL, AND Ø6.5 PAD.
6. KEYING PIN SHOWN IN POSITION A. SEE KEYING CHART
ON SHEET 2 FOR OTHER POSITIONS.

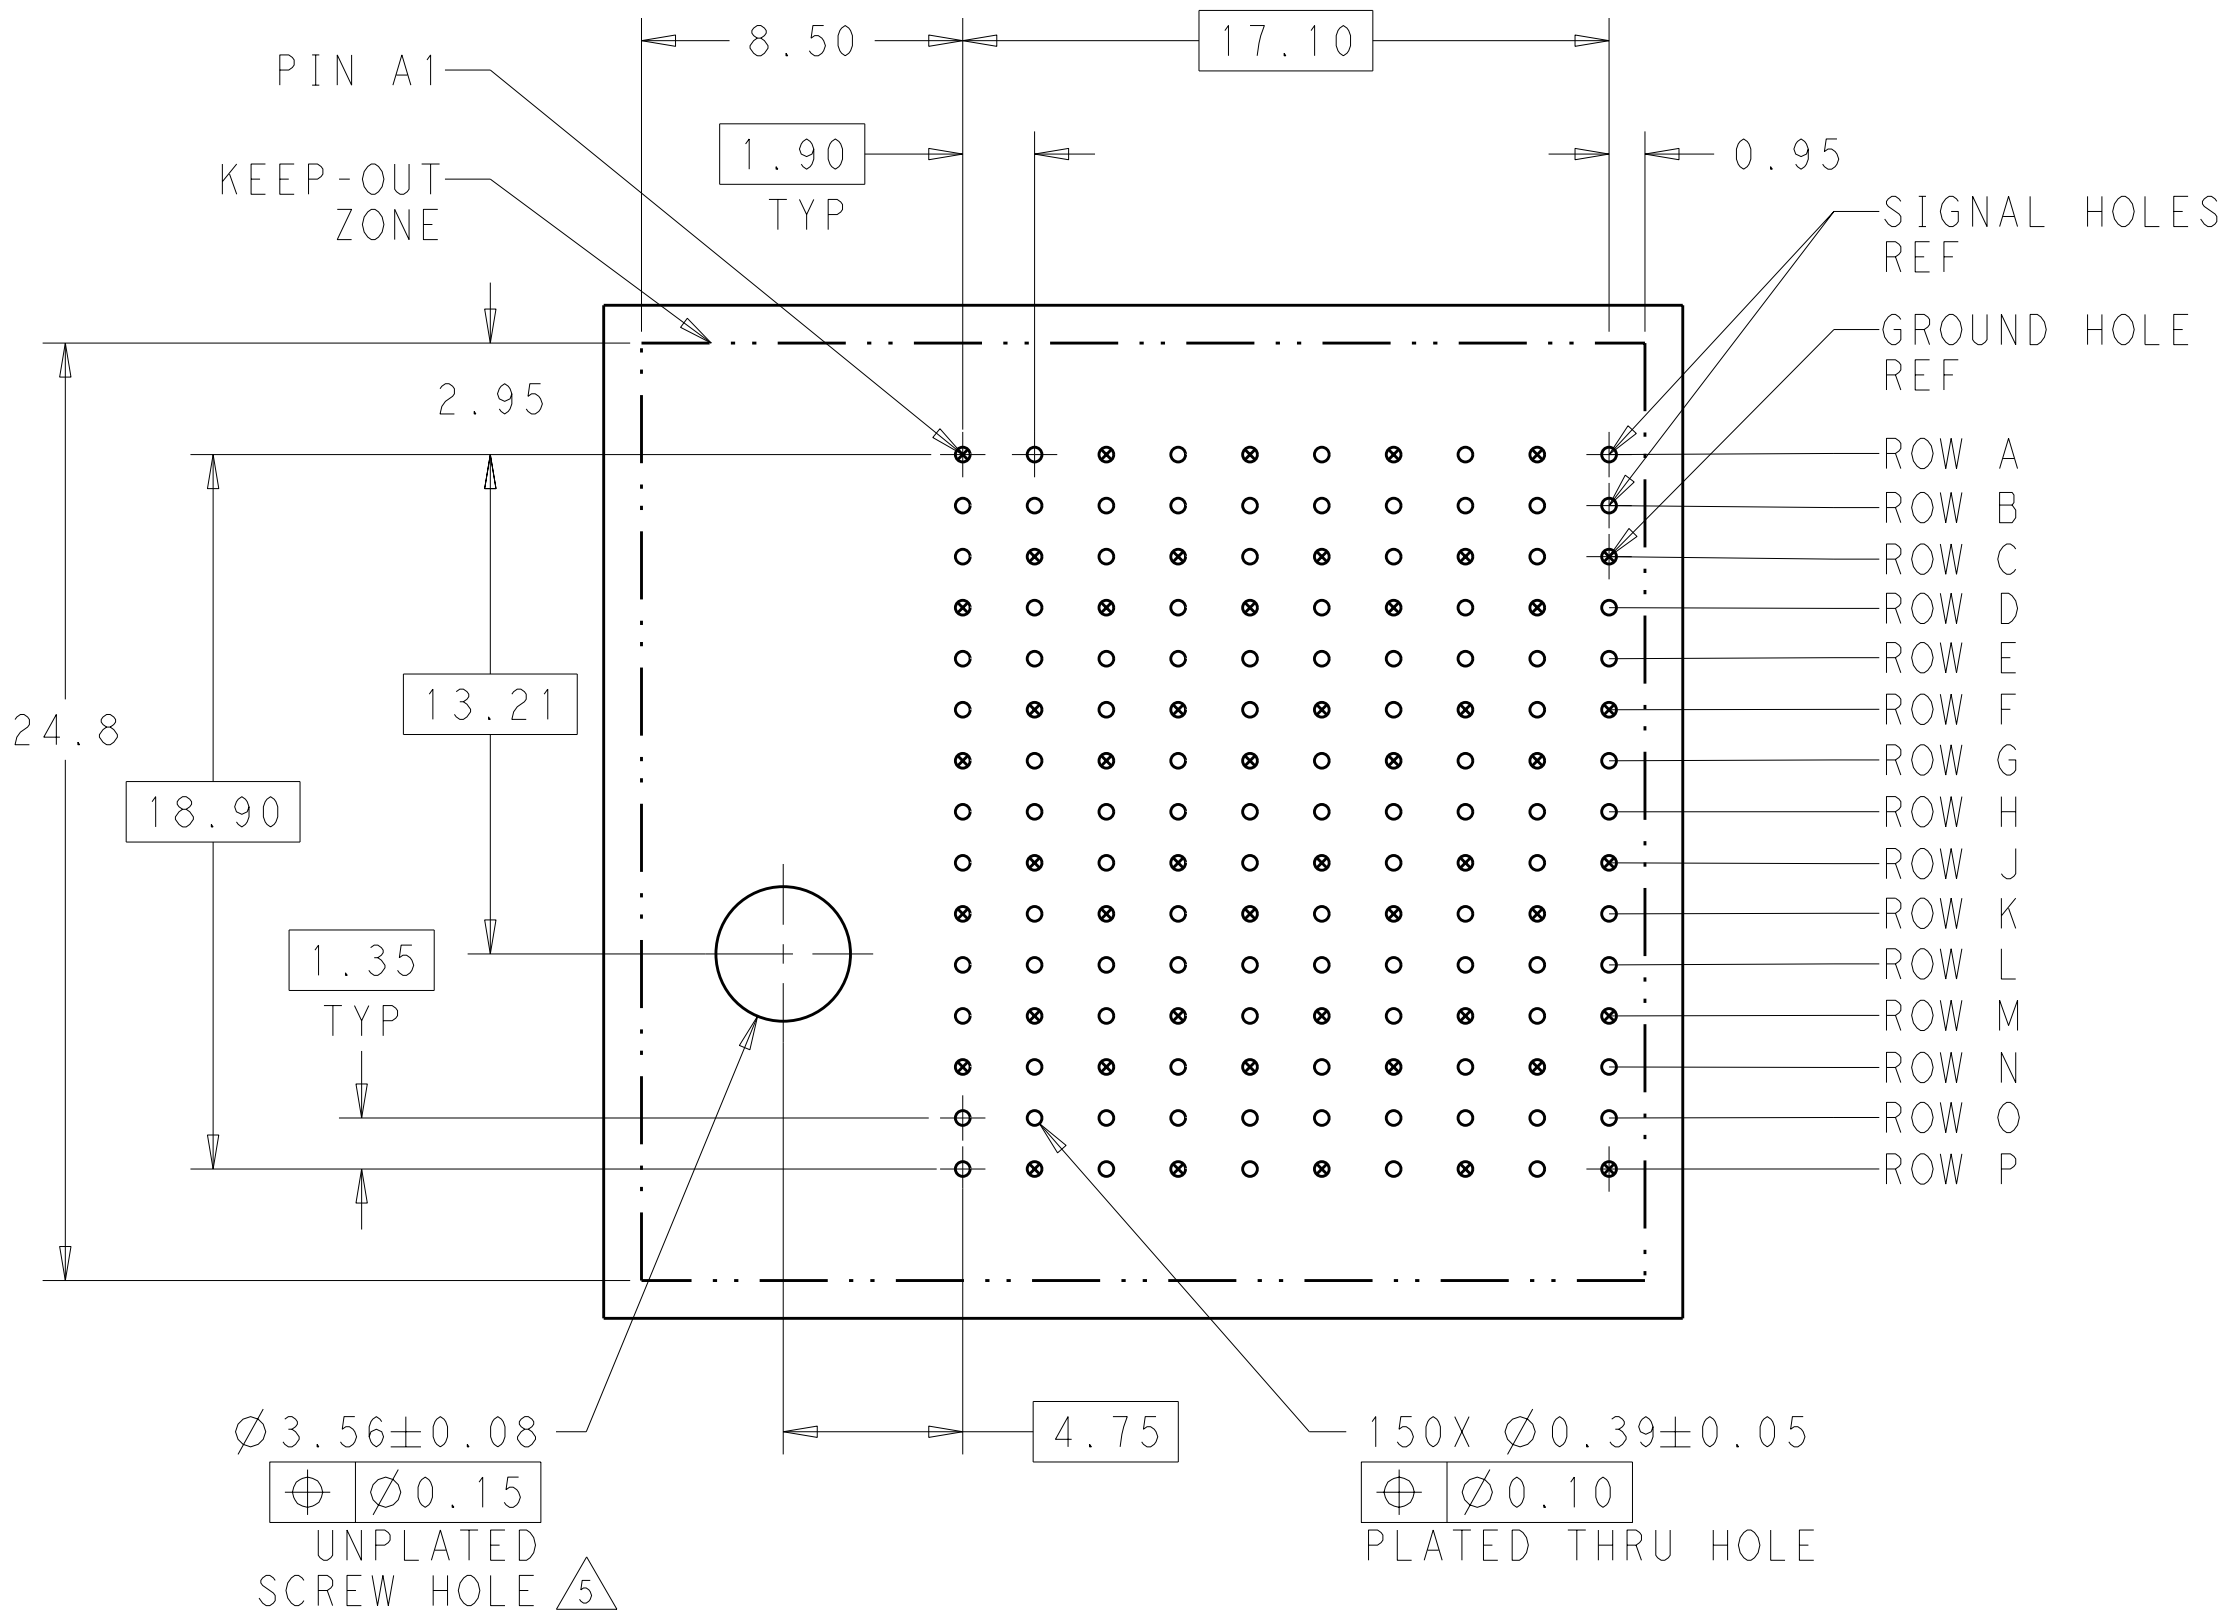


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	J. K. SHOBER	24FEB2011	 TE Connectivity		
DIMENSIONS:		CHK	J. EABY	24FEB2011			
mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	J. EABY	24FEB2011	NAME IMPACT, 5 PAIR, 10 COLUMN, HEADER LEFT GUIDED, OPEN END WALL SELECT LOAD, SIGNAL MODULE, 0.39 PTH

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	OWN	APVD
			-	SEE SHEET 1	-	-	-

2180313-1											
PART NUMBER											FINISH
CONTACT LAYOUT A = 4.5mm (DIM M) B = 4.9mm (DIM M) C = 5.5mm (DIM M)											
COLUMNS											
	1	2	3	4	5	6	7	8	9	10	
A	A	C	C	C	C	C	C	C	C	C	
B	C	C	C	C	C	C	C	C	C	C	
C	C	C	C	C	C	C	C	C	C	C	
D	C	C	C	C	C	C	C	C	C	C	
E	C	C	C	C	C	C	C	C	C	C	
F	C	C	C	C	C	C	C	C	C	C	
G	C	C	C	C	C	C	C	C	C	C	
H	C	C	C	C	C	C	C	C	C	C	
J	C	C	C	C	C	C	C	C	C	C	
K	C	C	C	C	C	C	C	C	C	C	
L	C	C	C	C	C	C	C	C	C	C	
M	C	C	C	C	C	C	C	C	C	C	
N	C	C	C	C	C	C	C	C	C	C	
O	C	C	C	C	C	C	C	C	C	C	
P	C	C	C	C	C	C	C	C	C	C	



OMIT
KEY PIN



GUIDE PIN

KEY POSITION CHART	
	NONE
	A
	E
	B
	F
	C
	G
	D
	H

REFER TO WWW.TE.COM
FOR PRODUCT AVAILABILITY

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN J. K. SHOBER 24FEB2011	TE Connectivity	
DIMENSIONS:		CHK J. EABY 24FEB2011		
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD J. EABY 24FEB2011	NAME IMPACT, 5 PAIR, 10 COLUMN, HEADER	
	3 PLD ±.25	PRODUCT SPEC	LEFT GUIDED, OPEN END WALL	
	2 PLD ±0.13	APPLICATION SPEC	SELECT LOAD, SIGNAL MODULE, 0.39 PTH	
	4 PLD ±.	WEIGHT	RESTRICTED TO	
MATERIAL	FINISH	CUSTOMER DRAWING	SIZE A100779	CAGE CODE C=2180313
-	SEE TABLE		SCALE 5:1	SHEET 2
-			OF 2	REV A