
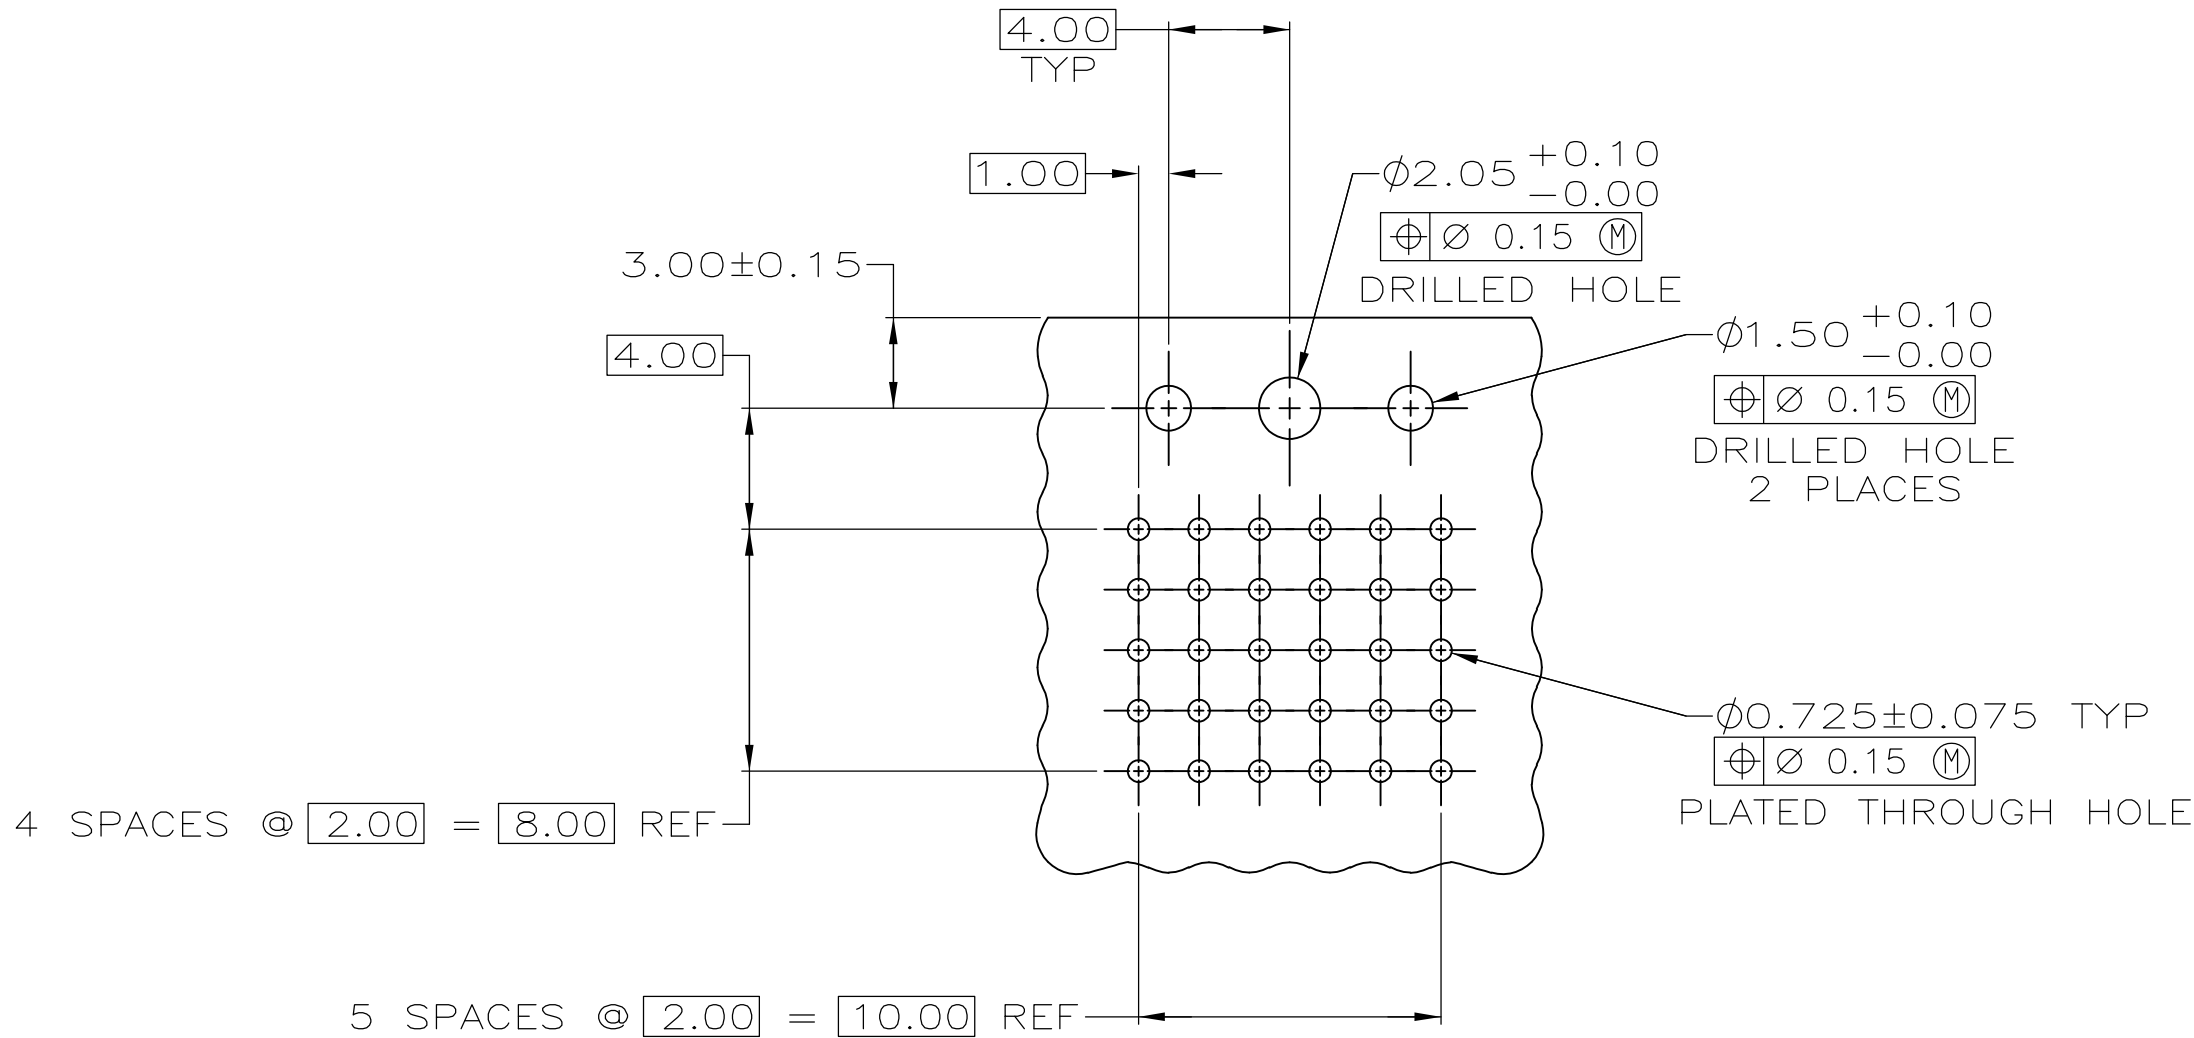
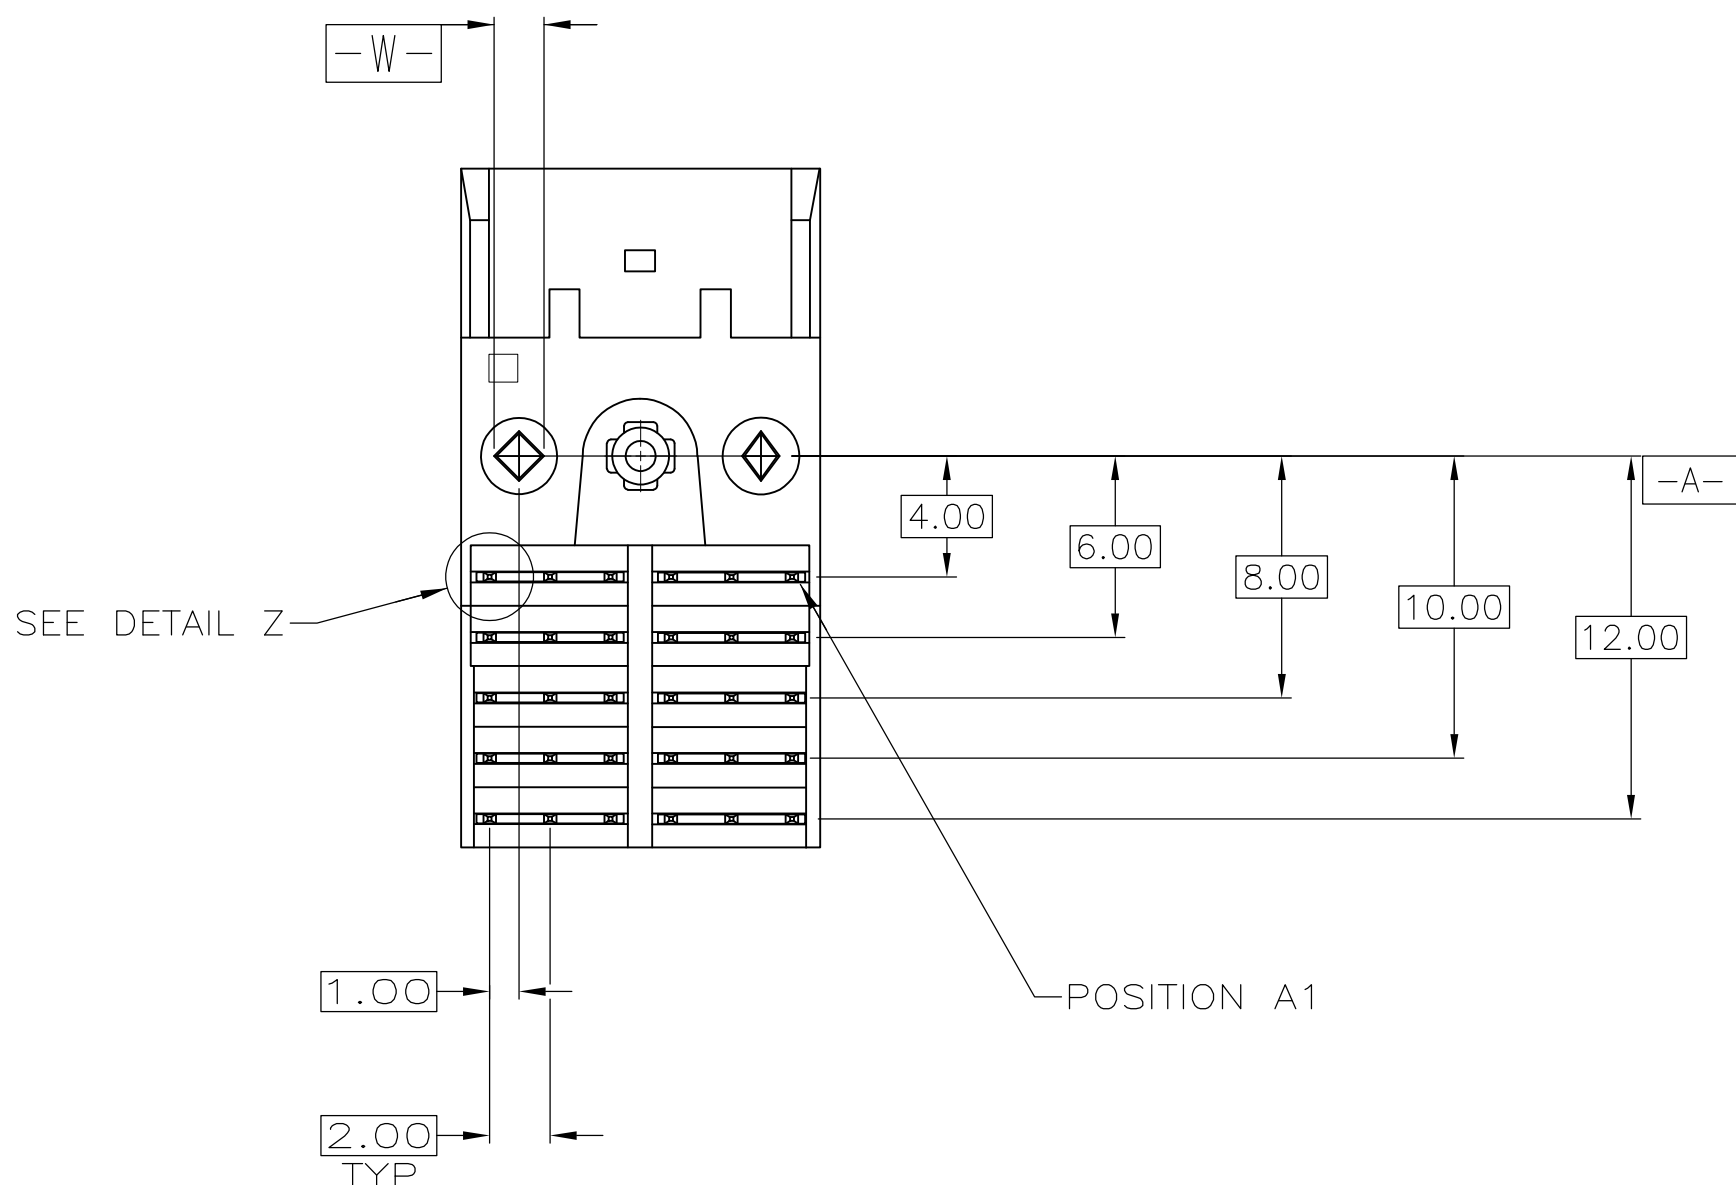
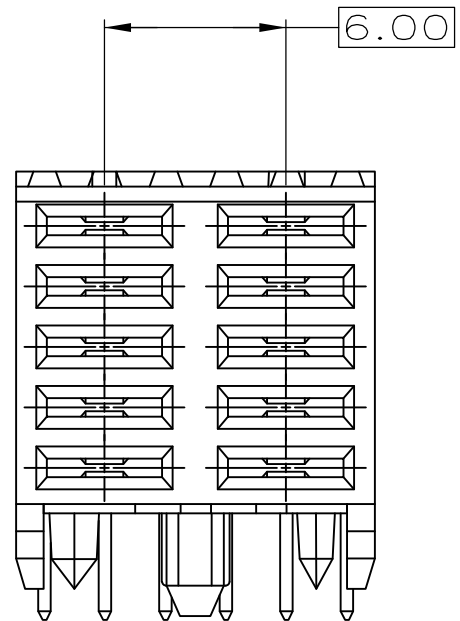


D



C

B

A

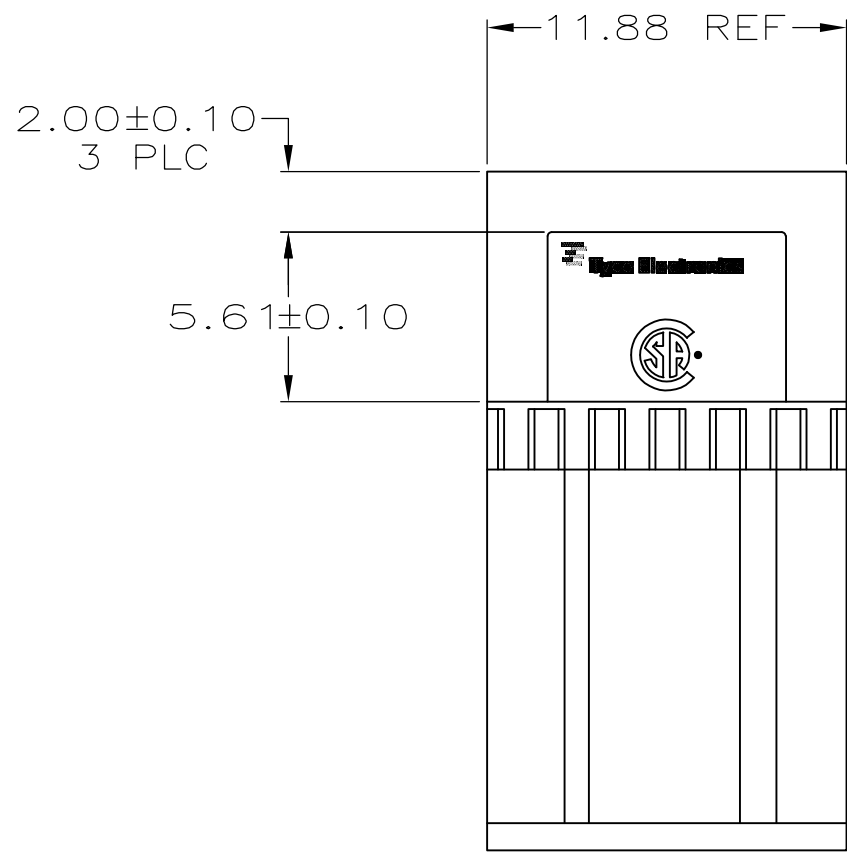

RECOMMENDED CIRCUIT PATTERN
PER IPC-D300 TYPE II, CLASS 3
COMPONENT SIDE

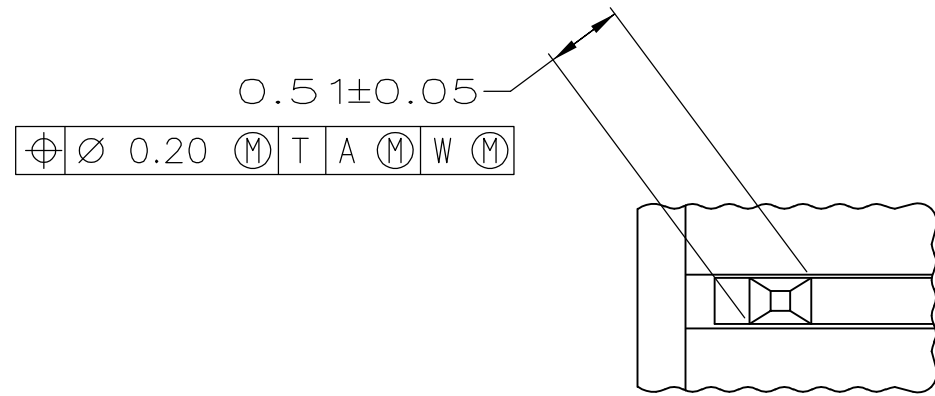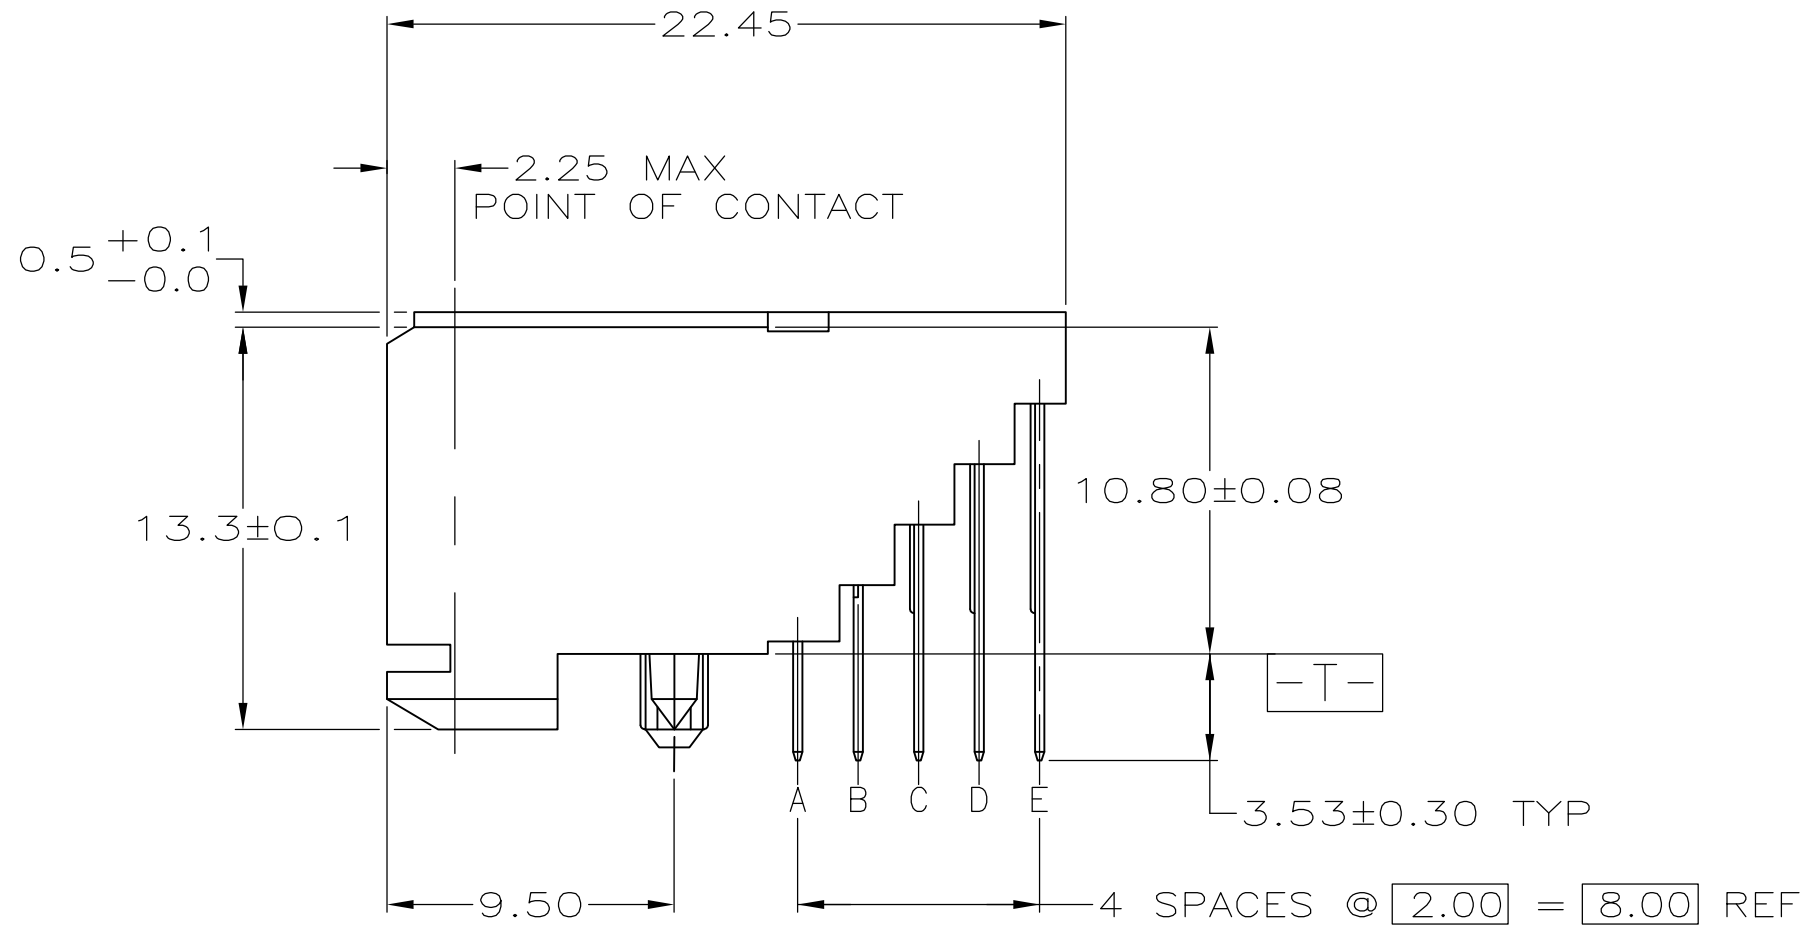

DETAIL Z
SCALE 20:1

- HOUSING MATERIAL: LIQUID CRYSTAL POLYMER.
COLOR: NATURAL.
- CONTACT MATERIAL: PHOSPHOR BRONZE.
- CONTACT FINISH:
UNDERPLATE (ENTIRE CONTACT):
0.00127 MIN NICKEL PER SAE-AMS-QQ-N-290
ON MATING SURFACES:
FLASH GOLD PER ASTM B 488, OVER
0.00076 MIN PALLADIUM-NICKEL OVER UNDERPLATE, OR
0.00076 MIN GOLD PER ASTM B 488 OVER UNDERPLATE.
ON LEADS:
0.00381 MIN MATTE TIN PER ASTM B 545 OVER UNDERPLATE.
LUBRICATION (MIN MATING SURFACES):
SURFACE CONDITIONER AFTER PLATING.

5223093-1
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN T. SHUEY 11-18-98	Tyco Electronics Corporation Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: mm		CHK C. SCHMID 11-19-98	NAME RCPT ASSEMBLY,POWER,Z-PACK 2mm FB, 10 POSITION,RIGHT ANGLE,SOLDER LEADS	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD C. SCHMID 11-19-98	PRODUCT SPEC	
0 PLC ± -		APPLICATION SPEC		SIZE A1
1 PLC ± -		WEIGHT		CAGE CODE 00779
2 PLC ± 0.13		CUSTOMER DRAWING		DRAWING NO 5223093
3 PLC ± 0.013		SCALE 4:1		SHEET 1 OF 1
4 PLC ± -		RESTRICTED TO		REV A1
ANGLES ± -				