

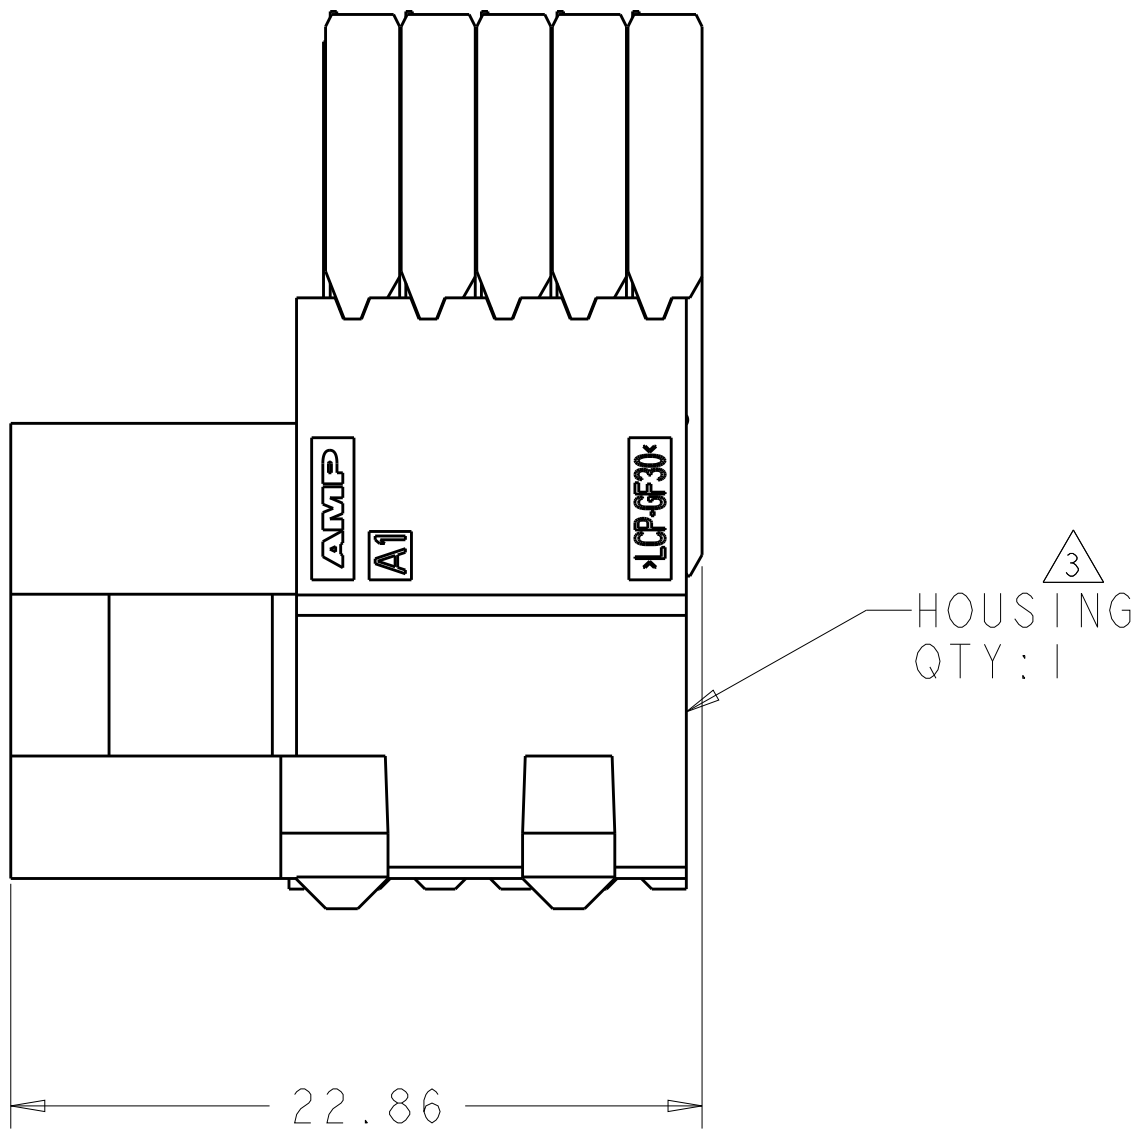
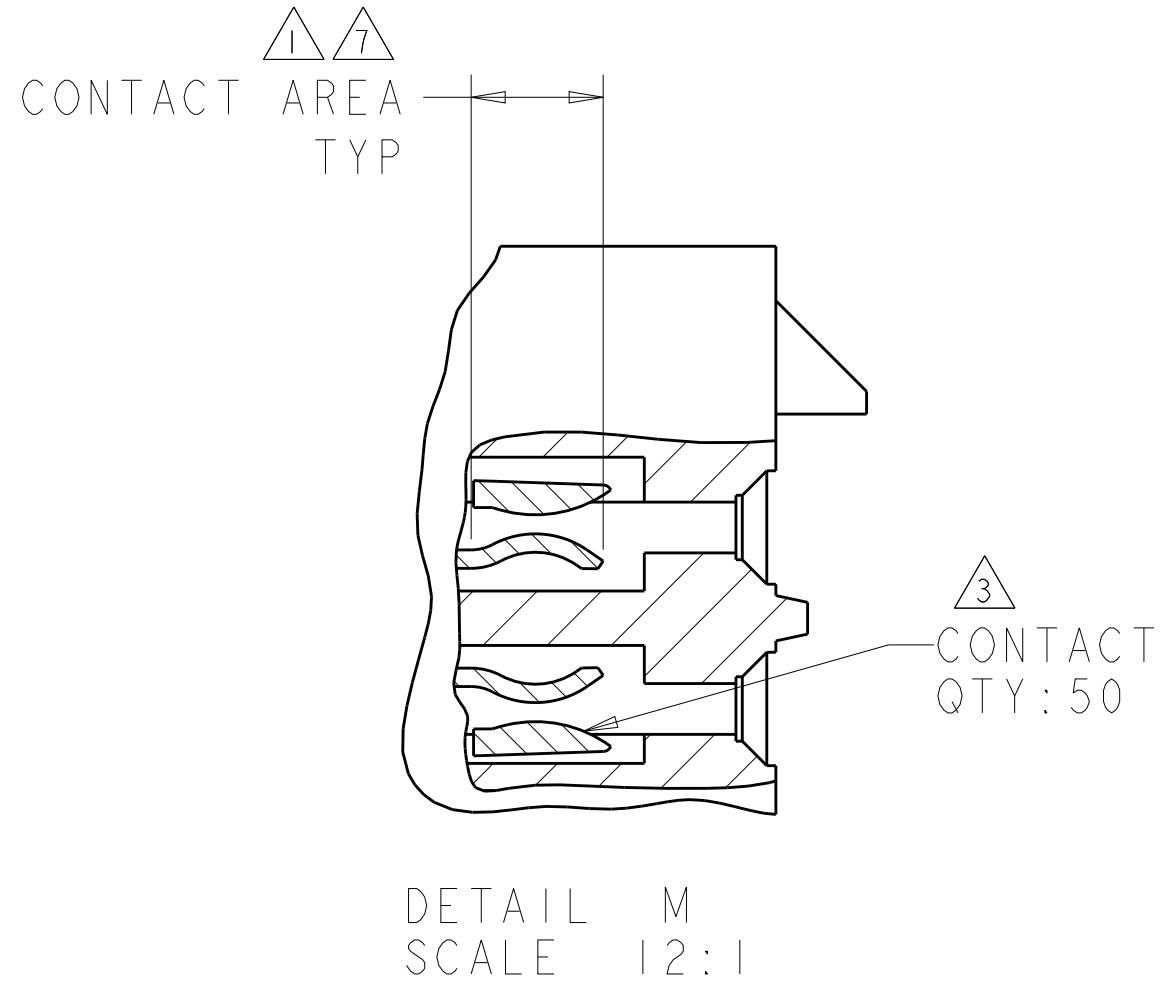
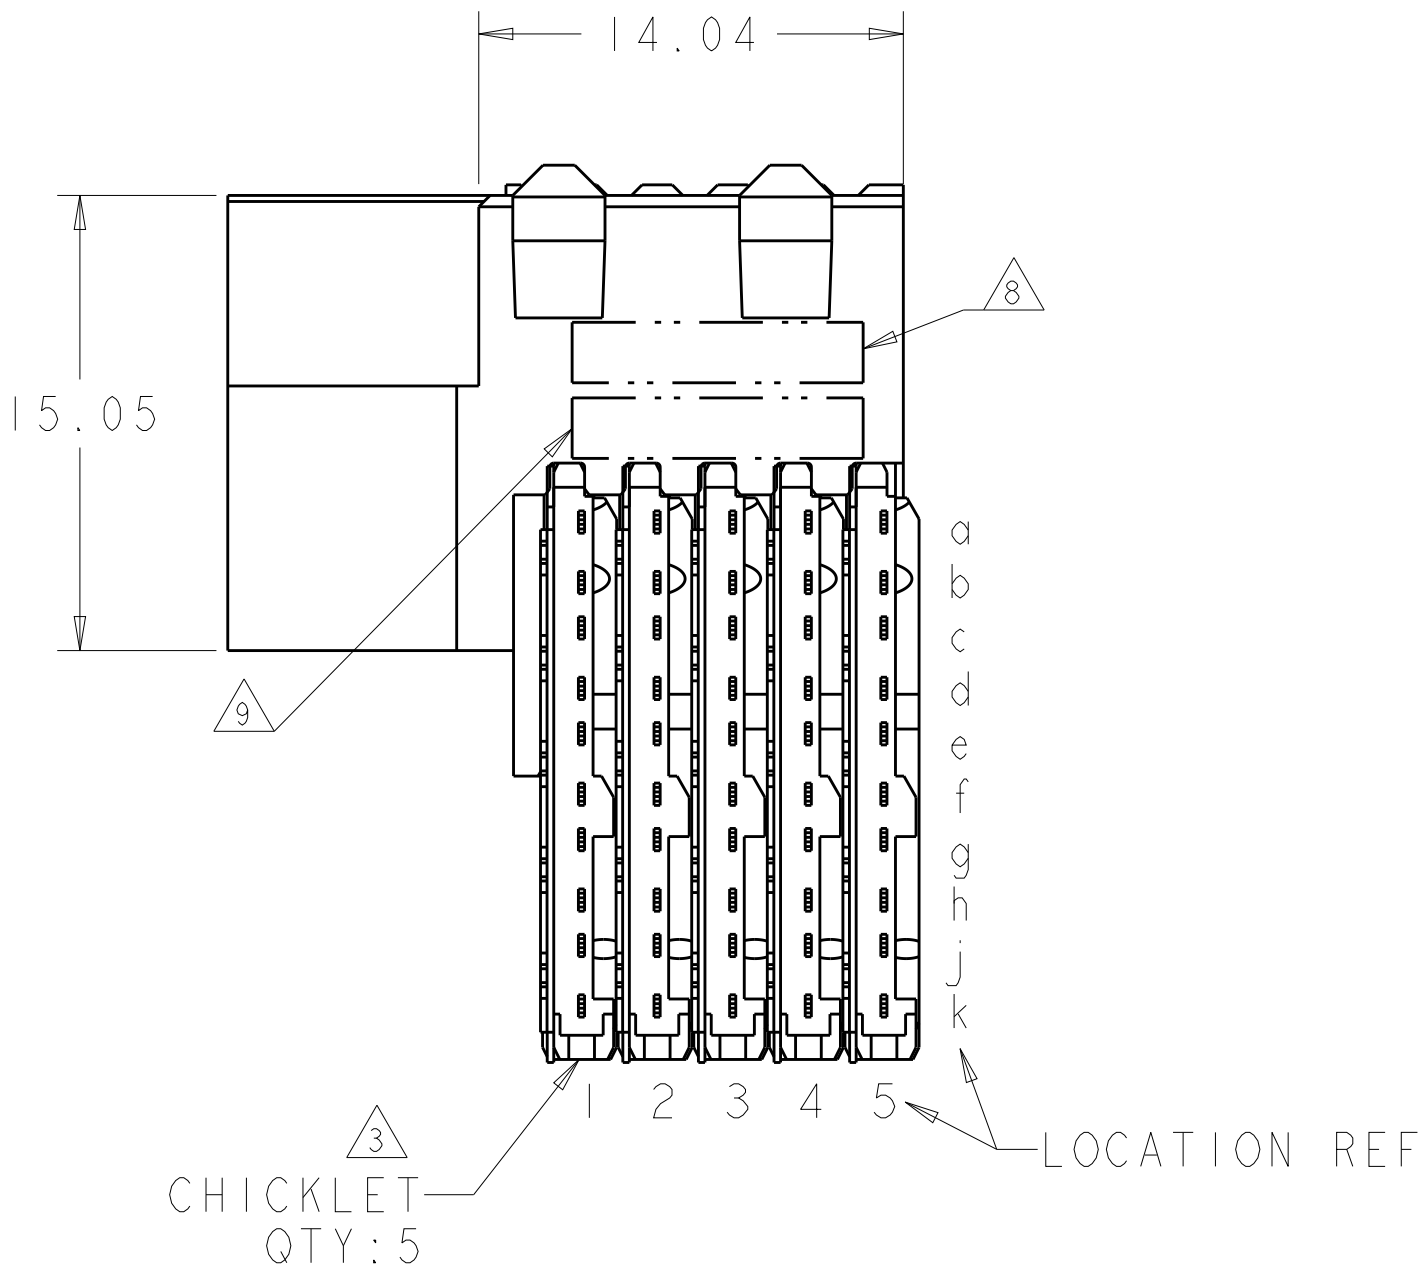


LOC		DIST		REVISIONS			
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		A1		REVISED PER ECO-18-020072	26DEC2018	R.L	H.L

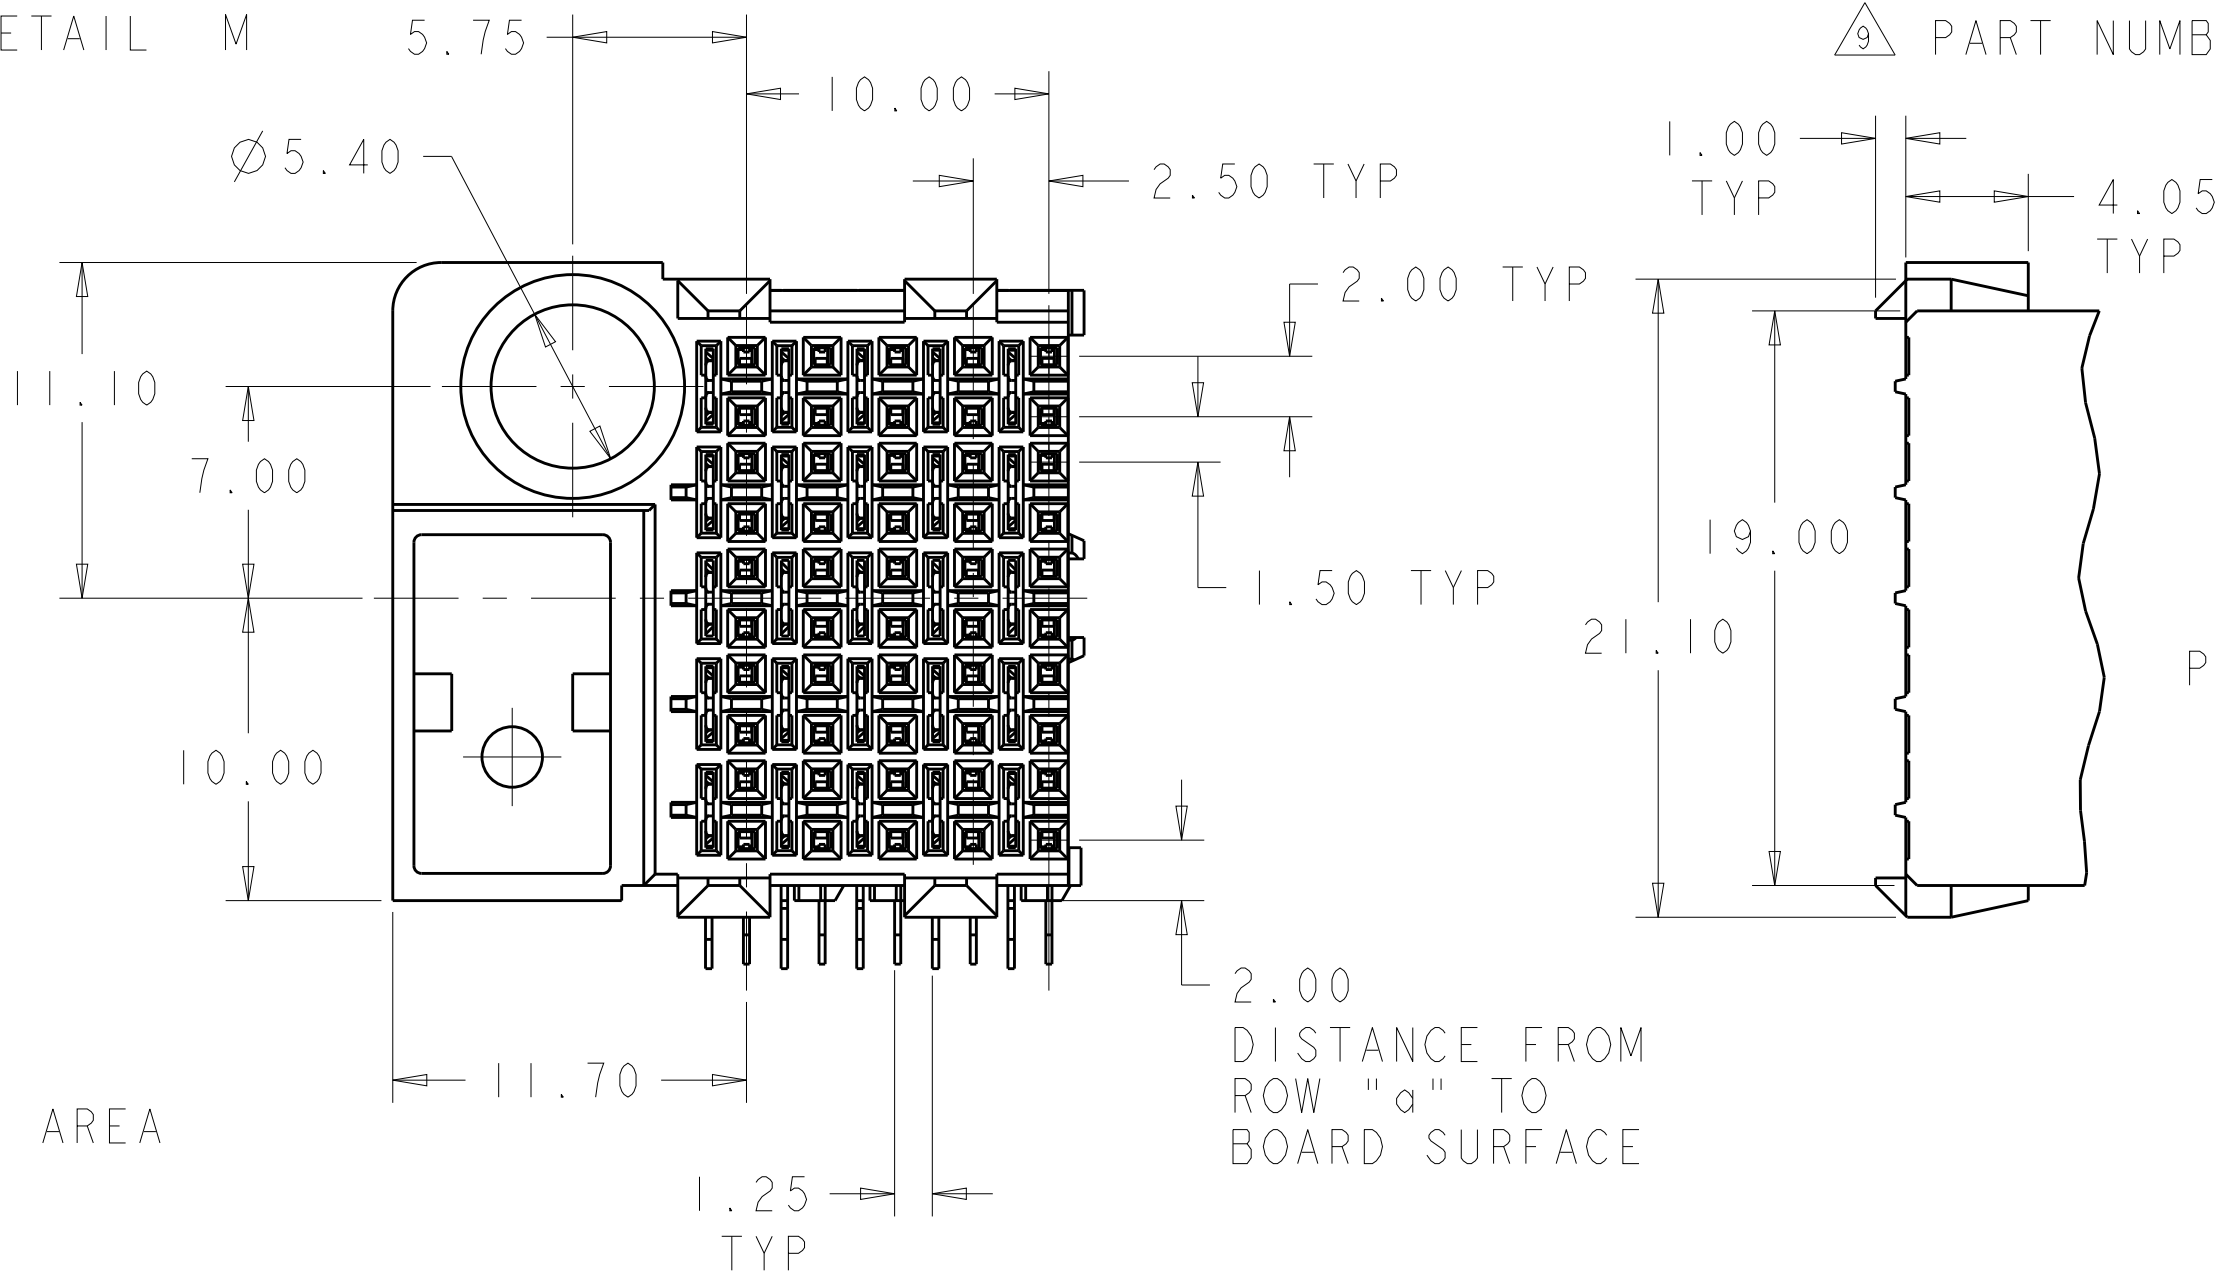

- CONTACT MATING AREA MEETS THE PERFORMANCE REQUIREMENTS OF TE CONNECTIVITY PRODUCT SPECIFICATION 108-1957; BASED ON TELCORDIA GR-1217-CORE, APPLICATIONS IN UNCONTROLLED ENVIRONMENTS.
- 0.76µm MIN TIN OVER 1.27µm MIN NICKEL
- MATERIAL: CONTACT - COPPER ALLOY
SHIELD - PHOSPHOR BRONZE
HOUSING -LCP, UL94V-0
CHICKLET - GLASS FILLED POLYESTER
- REFERENCE APPLICATION SPEC 114-13020 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESS.
- DATUM AND BASIC DIMENSION ESTABLISHED BY CUSTOMER.
- SEATING HEIGHT TO BOARD SURFACE.
- CONTACT AREA LUBRICATED WITH BELLCORE APROVED LUBRICANT. TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995.
- DATE CODE
- PART NUMBER

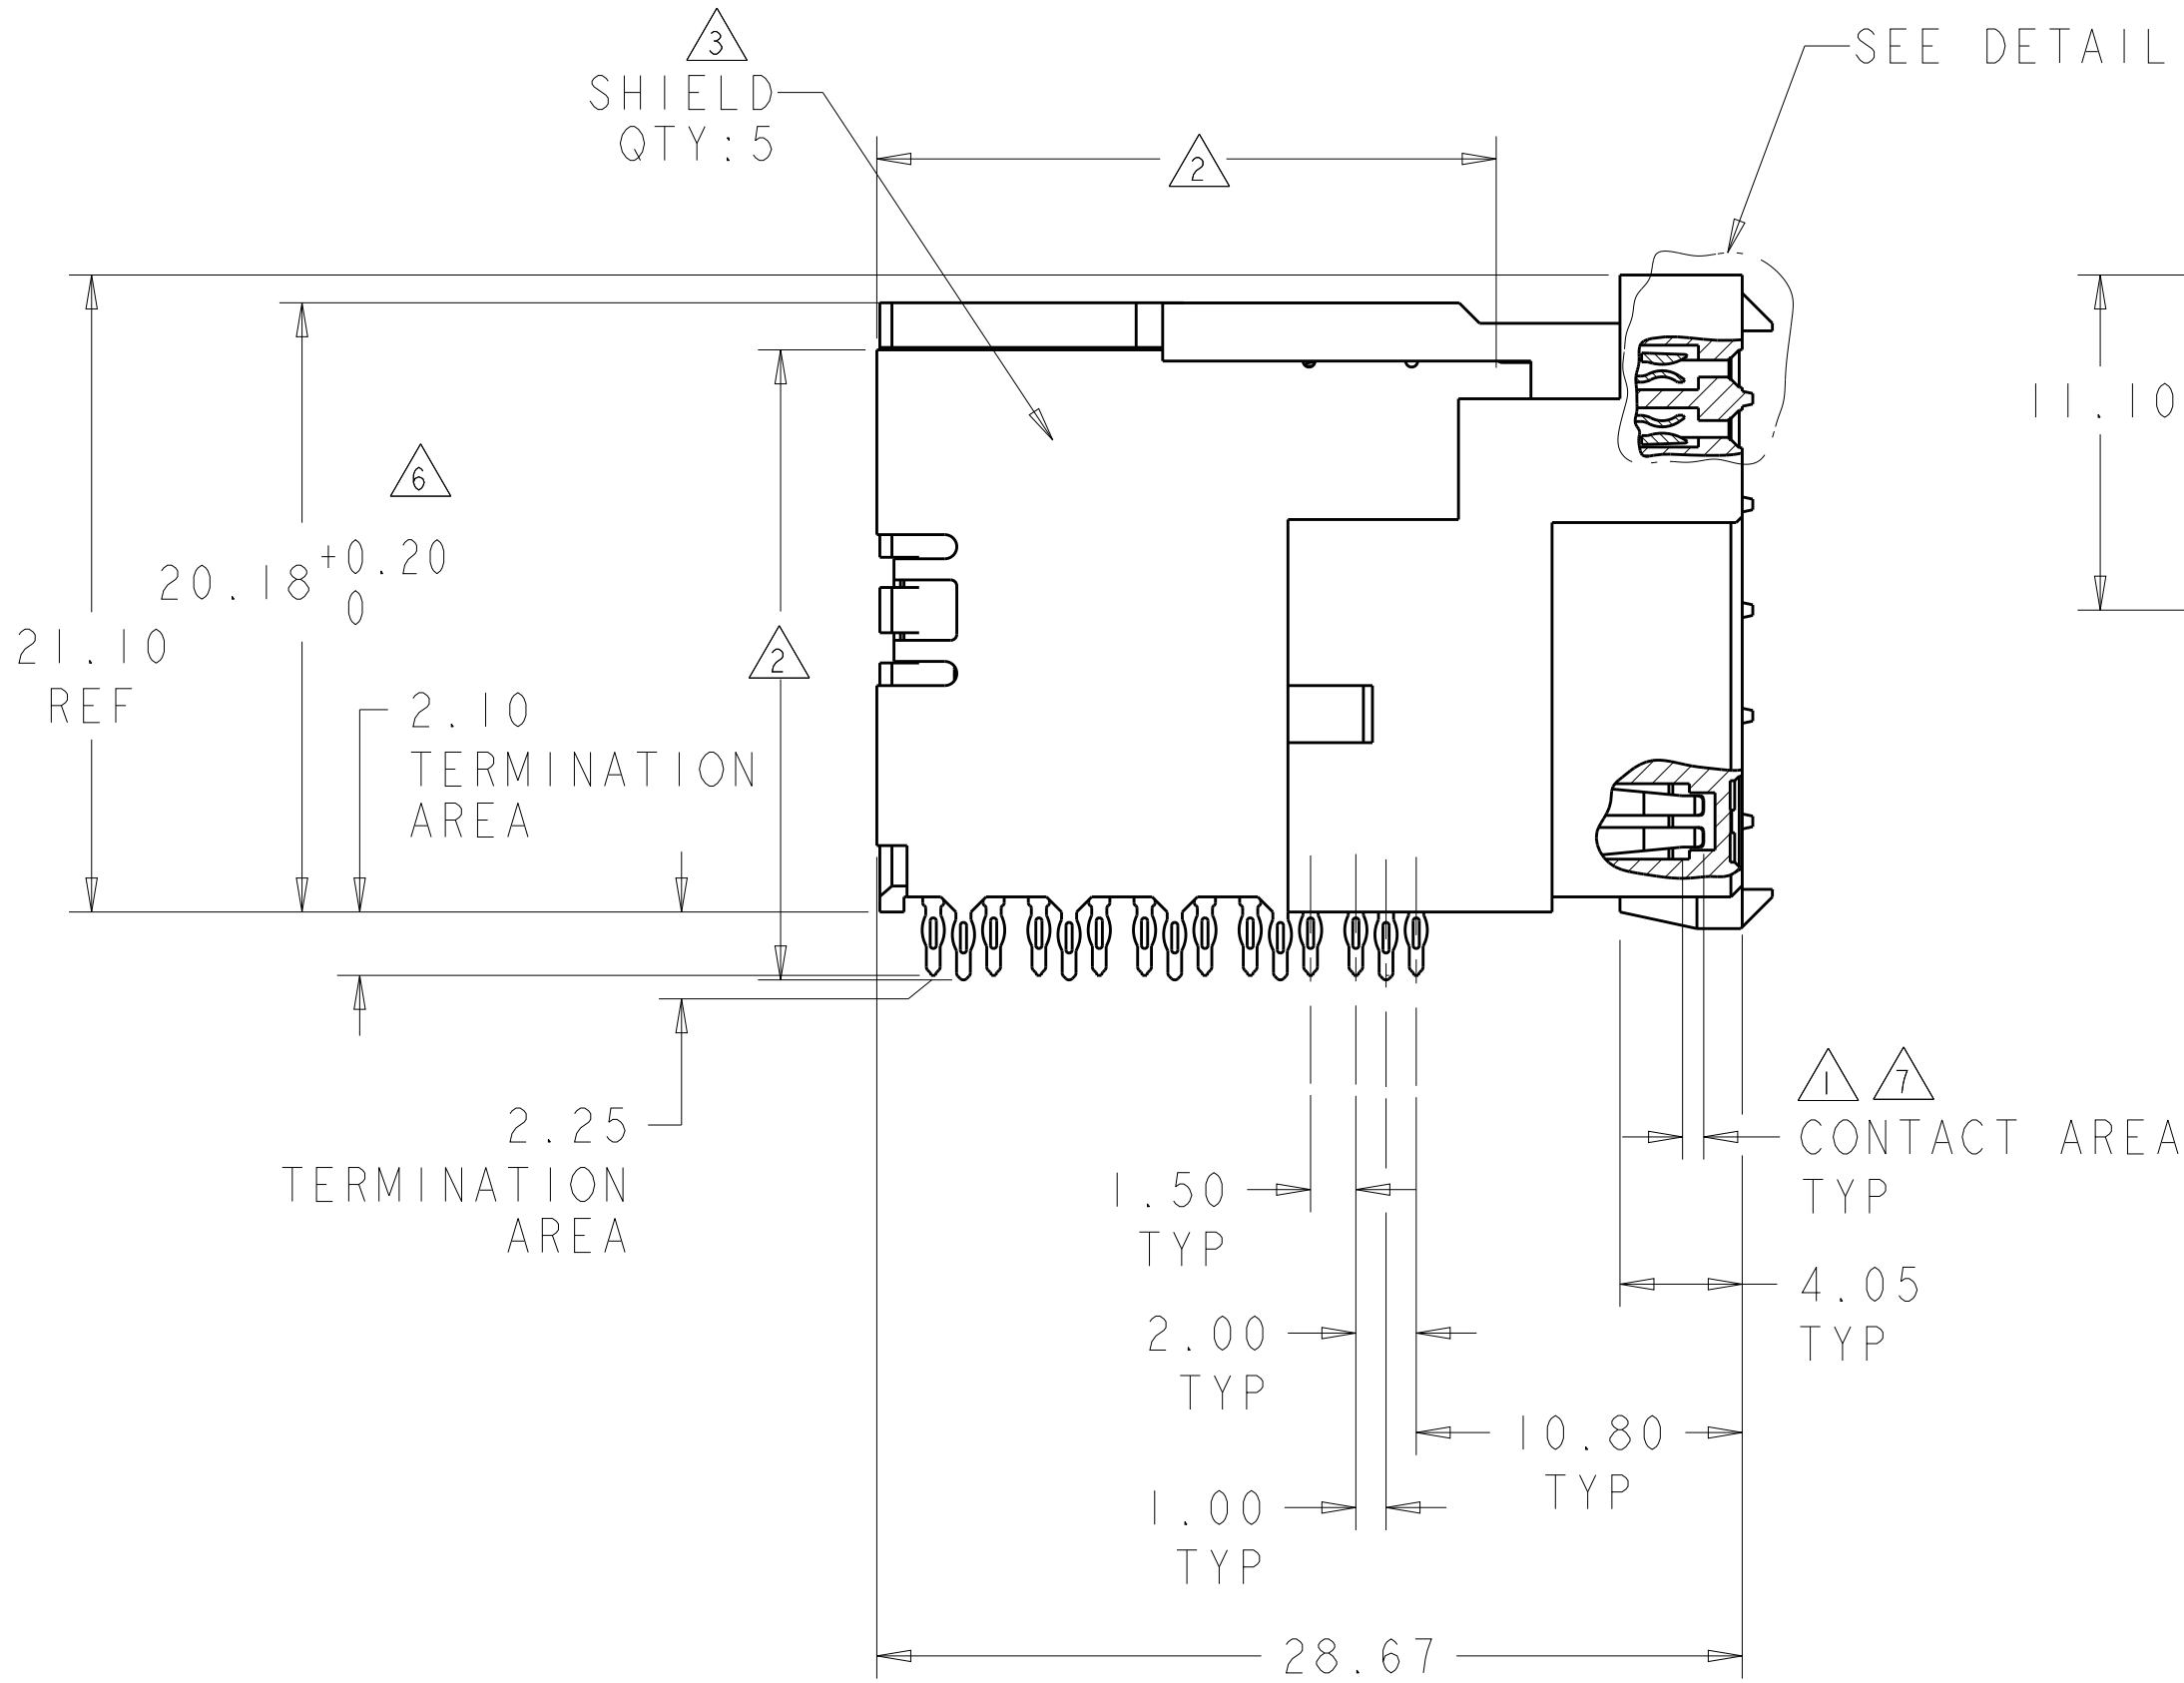

RECOMMENDED PRINTED
CIRCUIT BOARD LAYOUT
COMPONENT SIDE OF PRINTED CIRCUIT BOARD

5120795-1
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. CARBO	08DEC04	TE TE Connectivity			
DIMENSIONS:		CHK R. PATTERSON	08DEC04				
mm		APVD R. PATTERSON	08DEC04	NAME RECEPTACLE ASSEMBLY, 50 POSITION, UNIVERSAL GUIDE PIN, LEFT HAND, 10 ROW, DUAL BEAM, Z-PACK HS3			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC		SIZE			
0 PLC ±.2		108-1957		CAGE CODE			
1 PLC ±0.2		APPLICATION SPEC		DRAWING NO			
2 PLC ±0.13		114-13020		RESTRICTED TO			
3 PLC ±0.05		WEIGHT		A100779C=5120795			
4 PLC ±.1		CONTACT		SCALE 4:1 SHEET 1 OF 1 REV A1			
ANGLES		CUSTOMER DRAWING					
FINISH							
SOLDER TAIL: 2							