

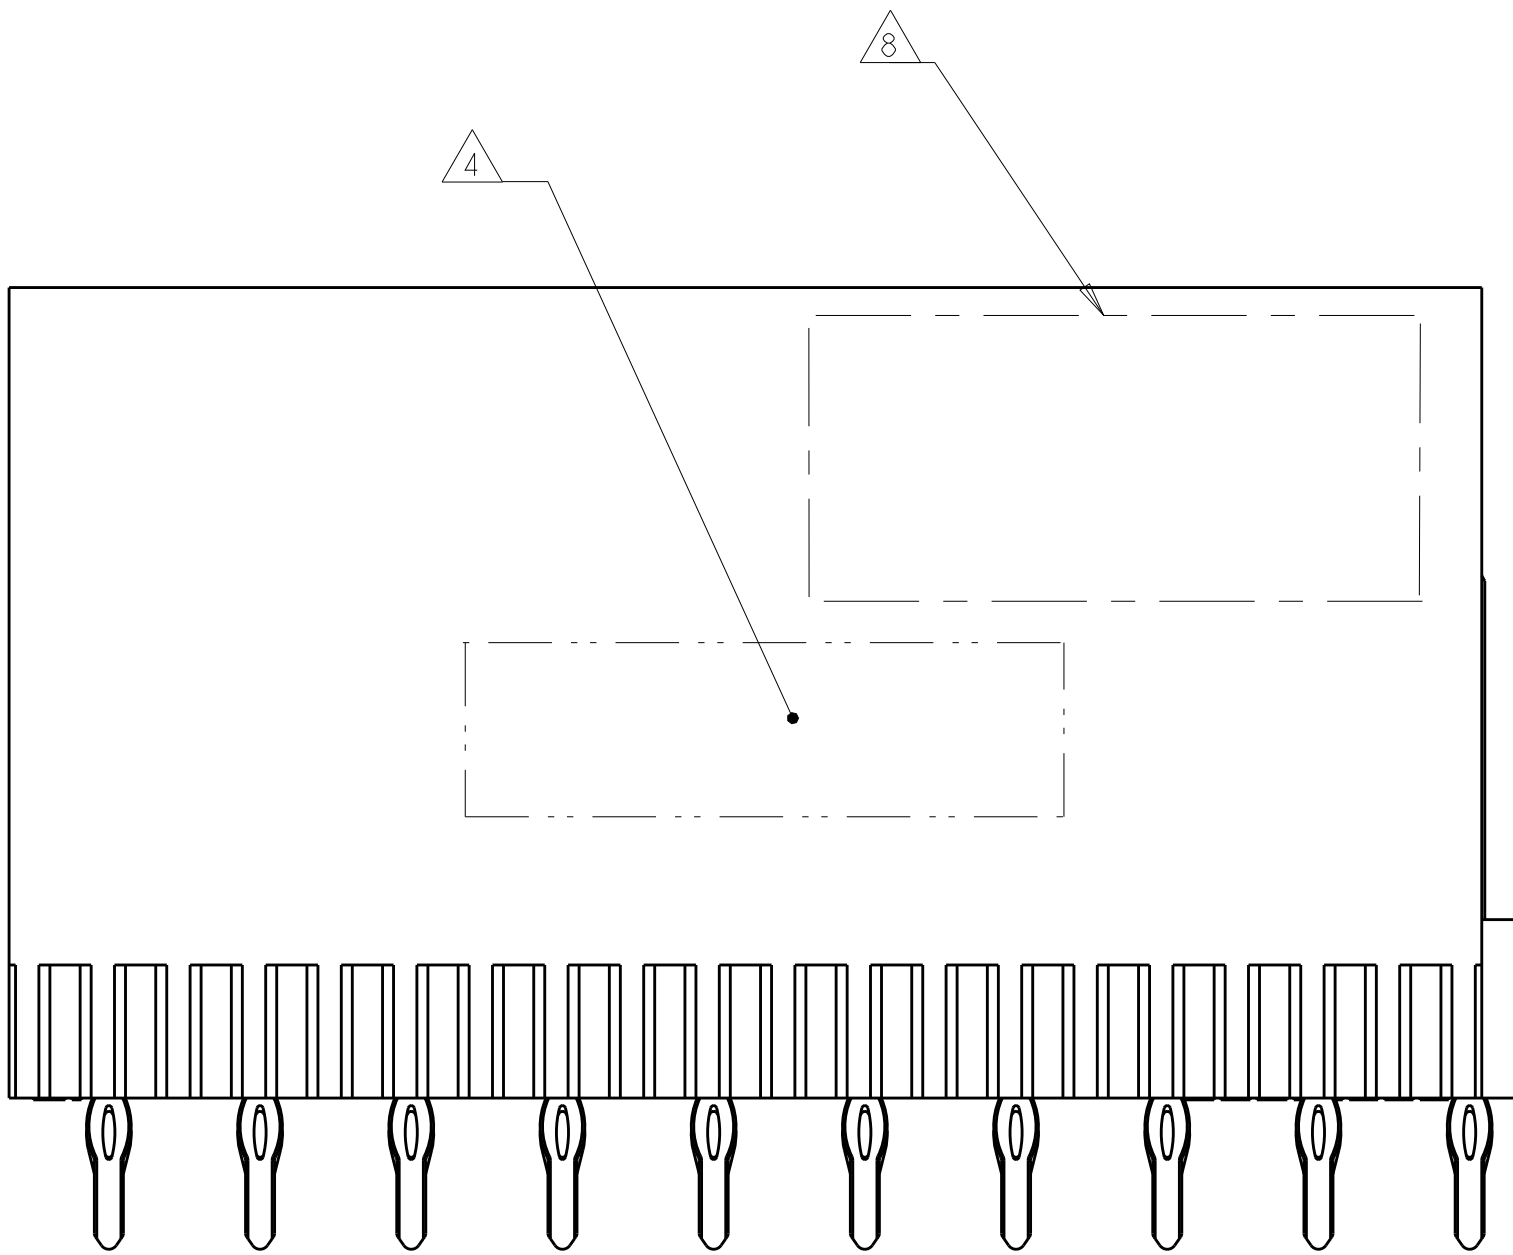
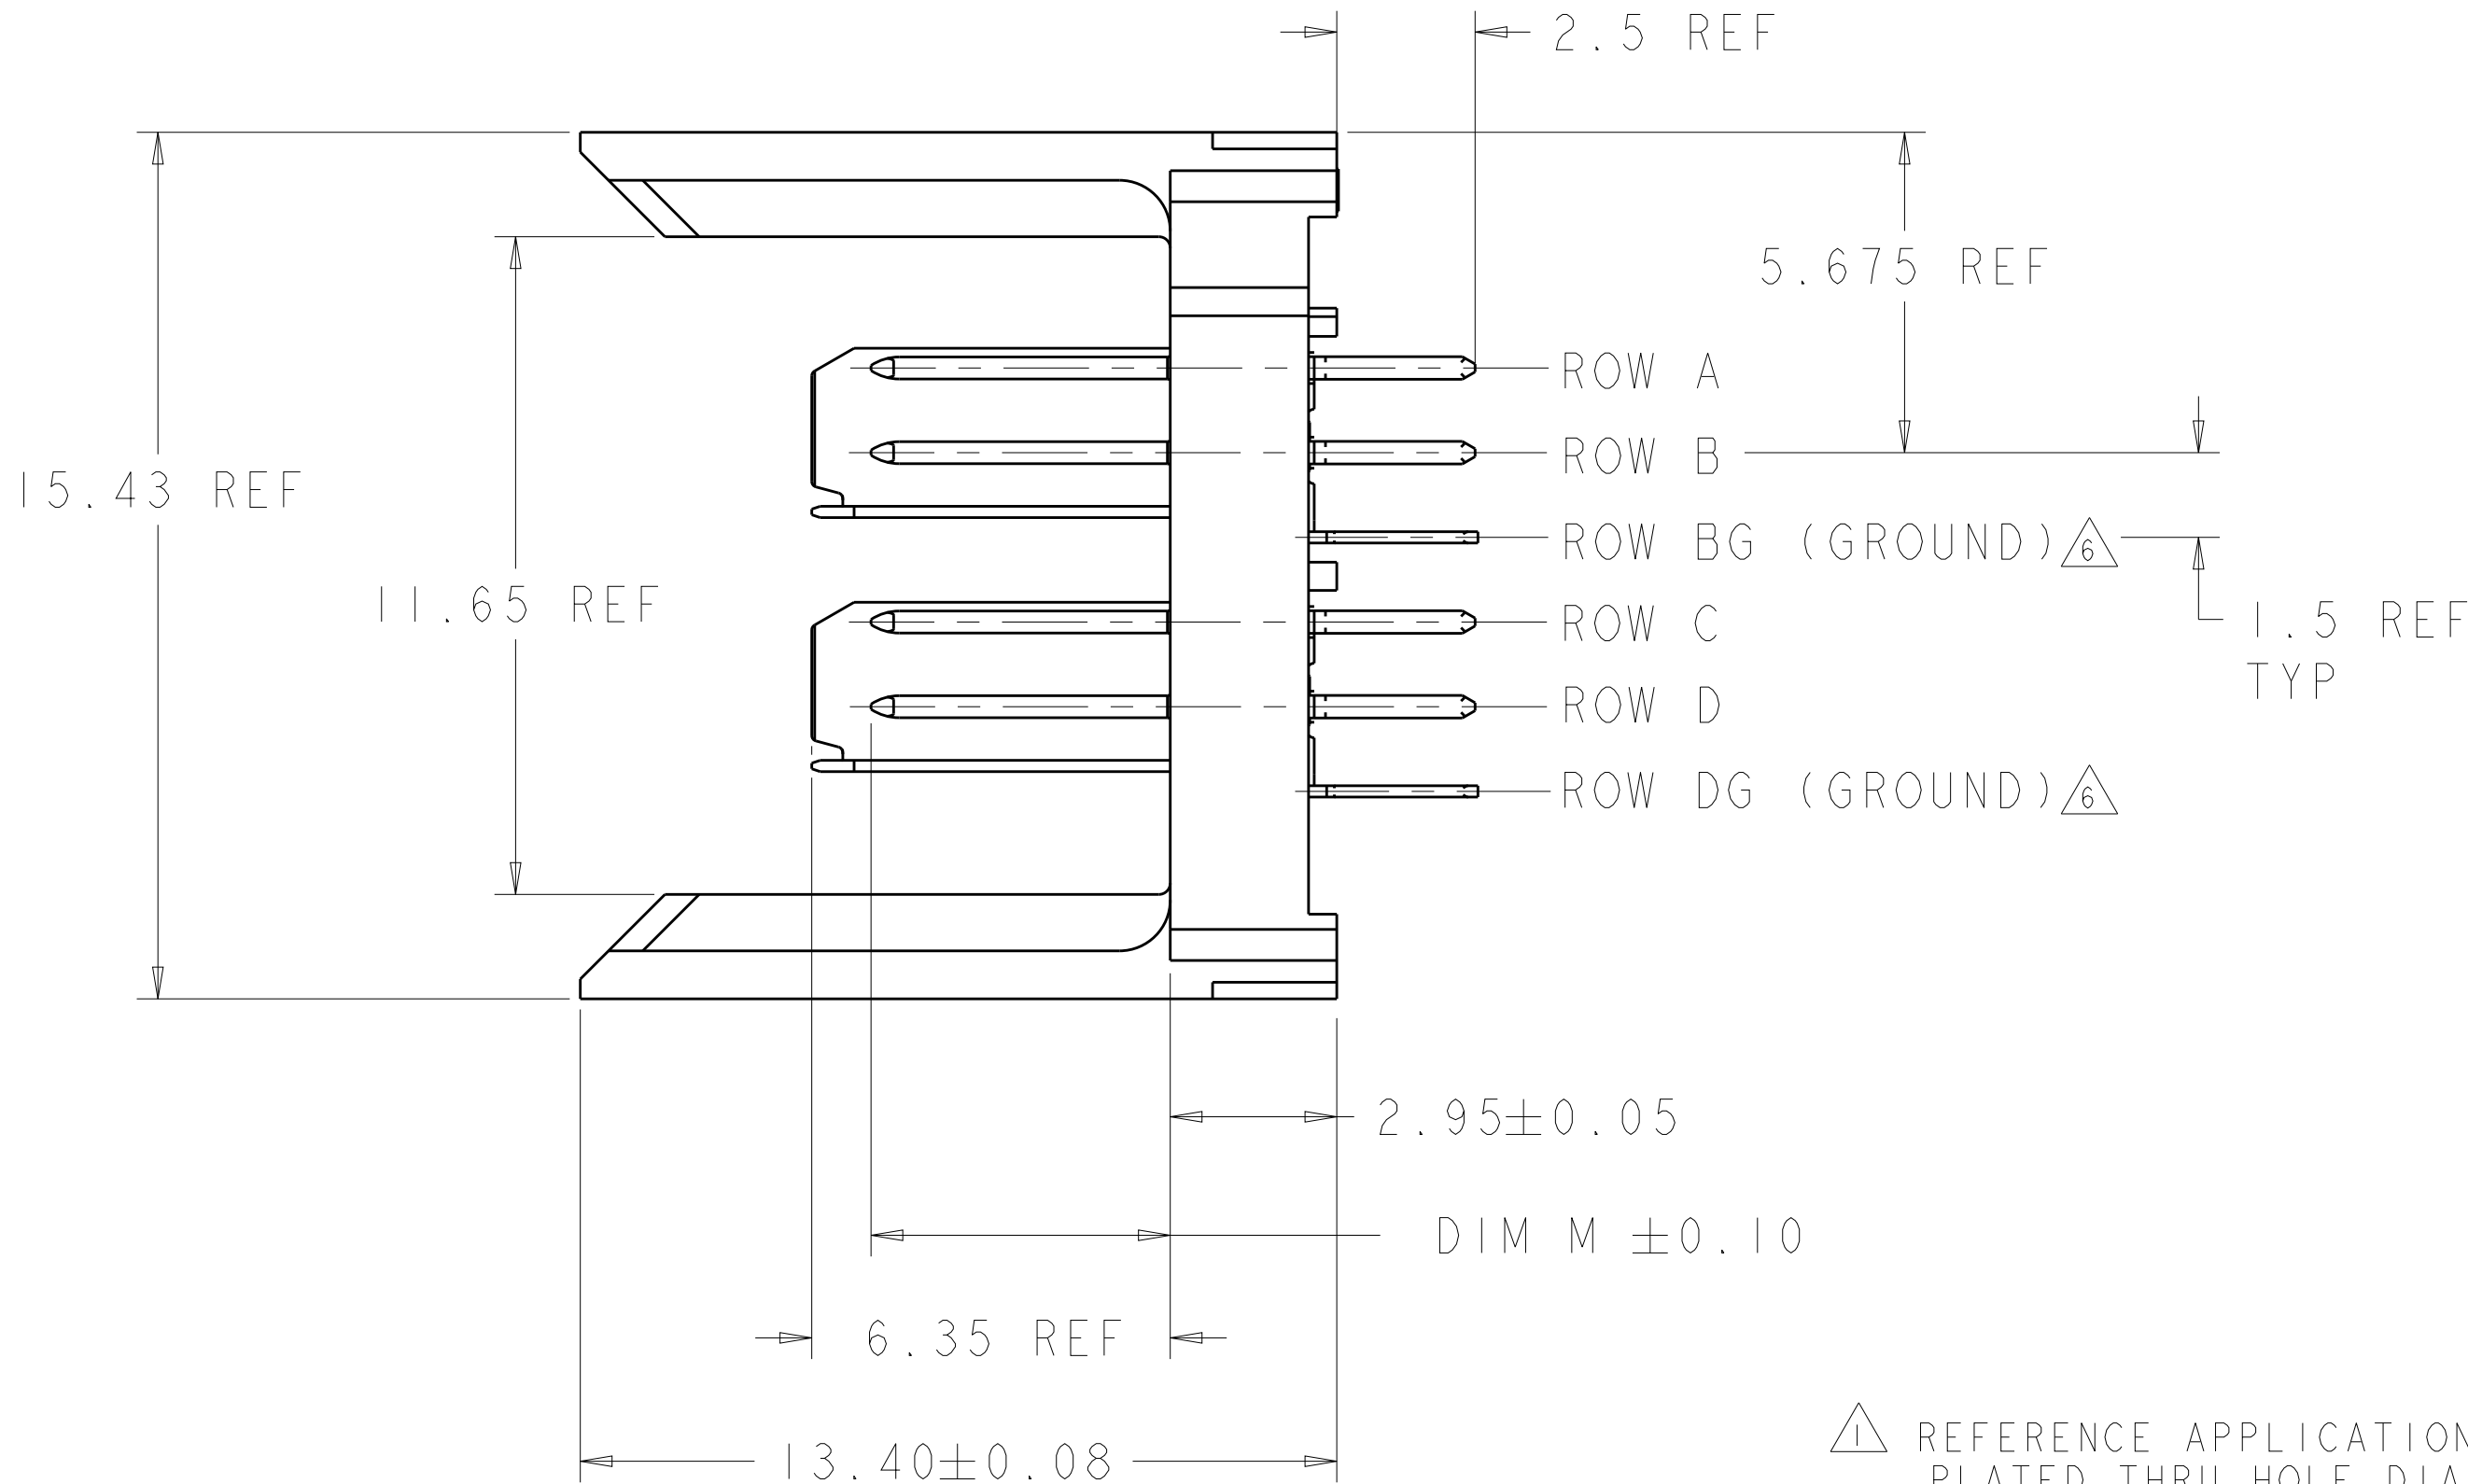


LOC	DIST	REVISIONS						
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD	
			B	REVISED PER ECO-12-000118	17JAN12	KH	DY	
			C	REVISED PER ECO-18-018129	25SEP2019	AP	DS	

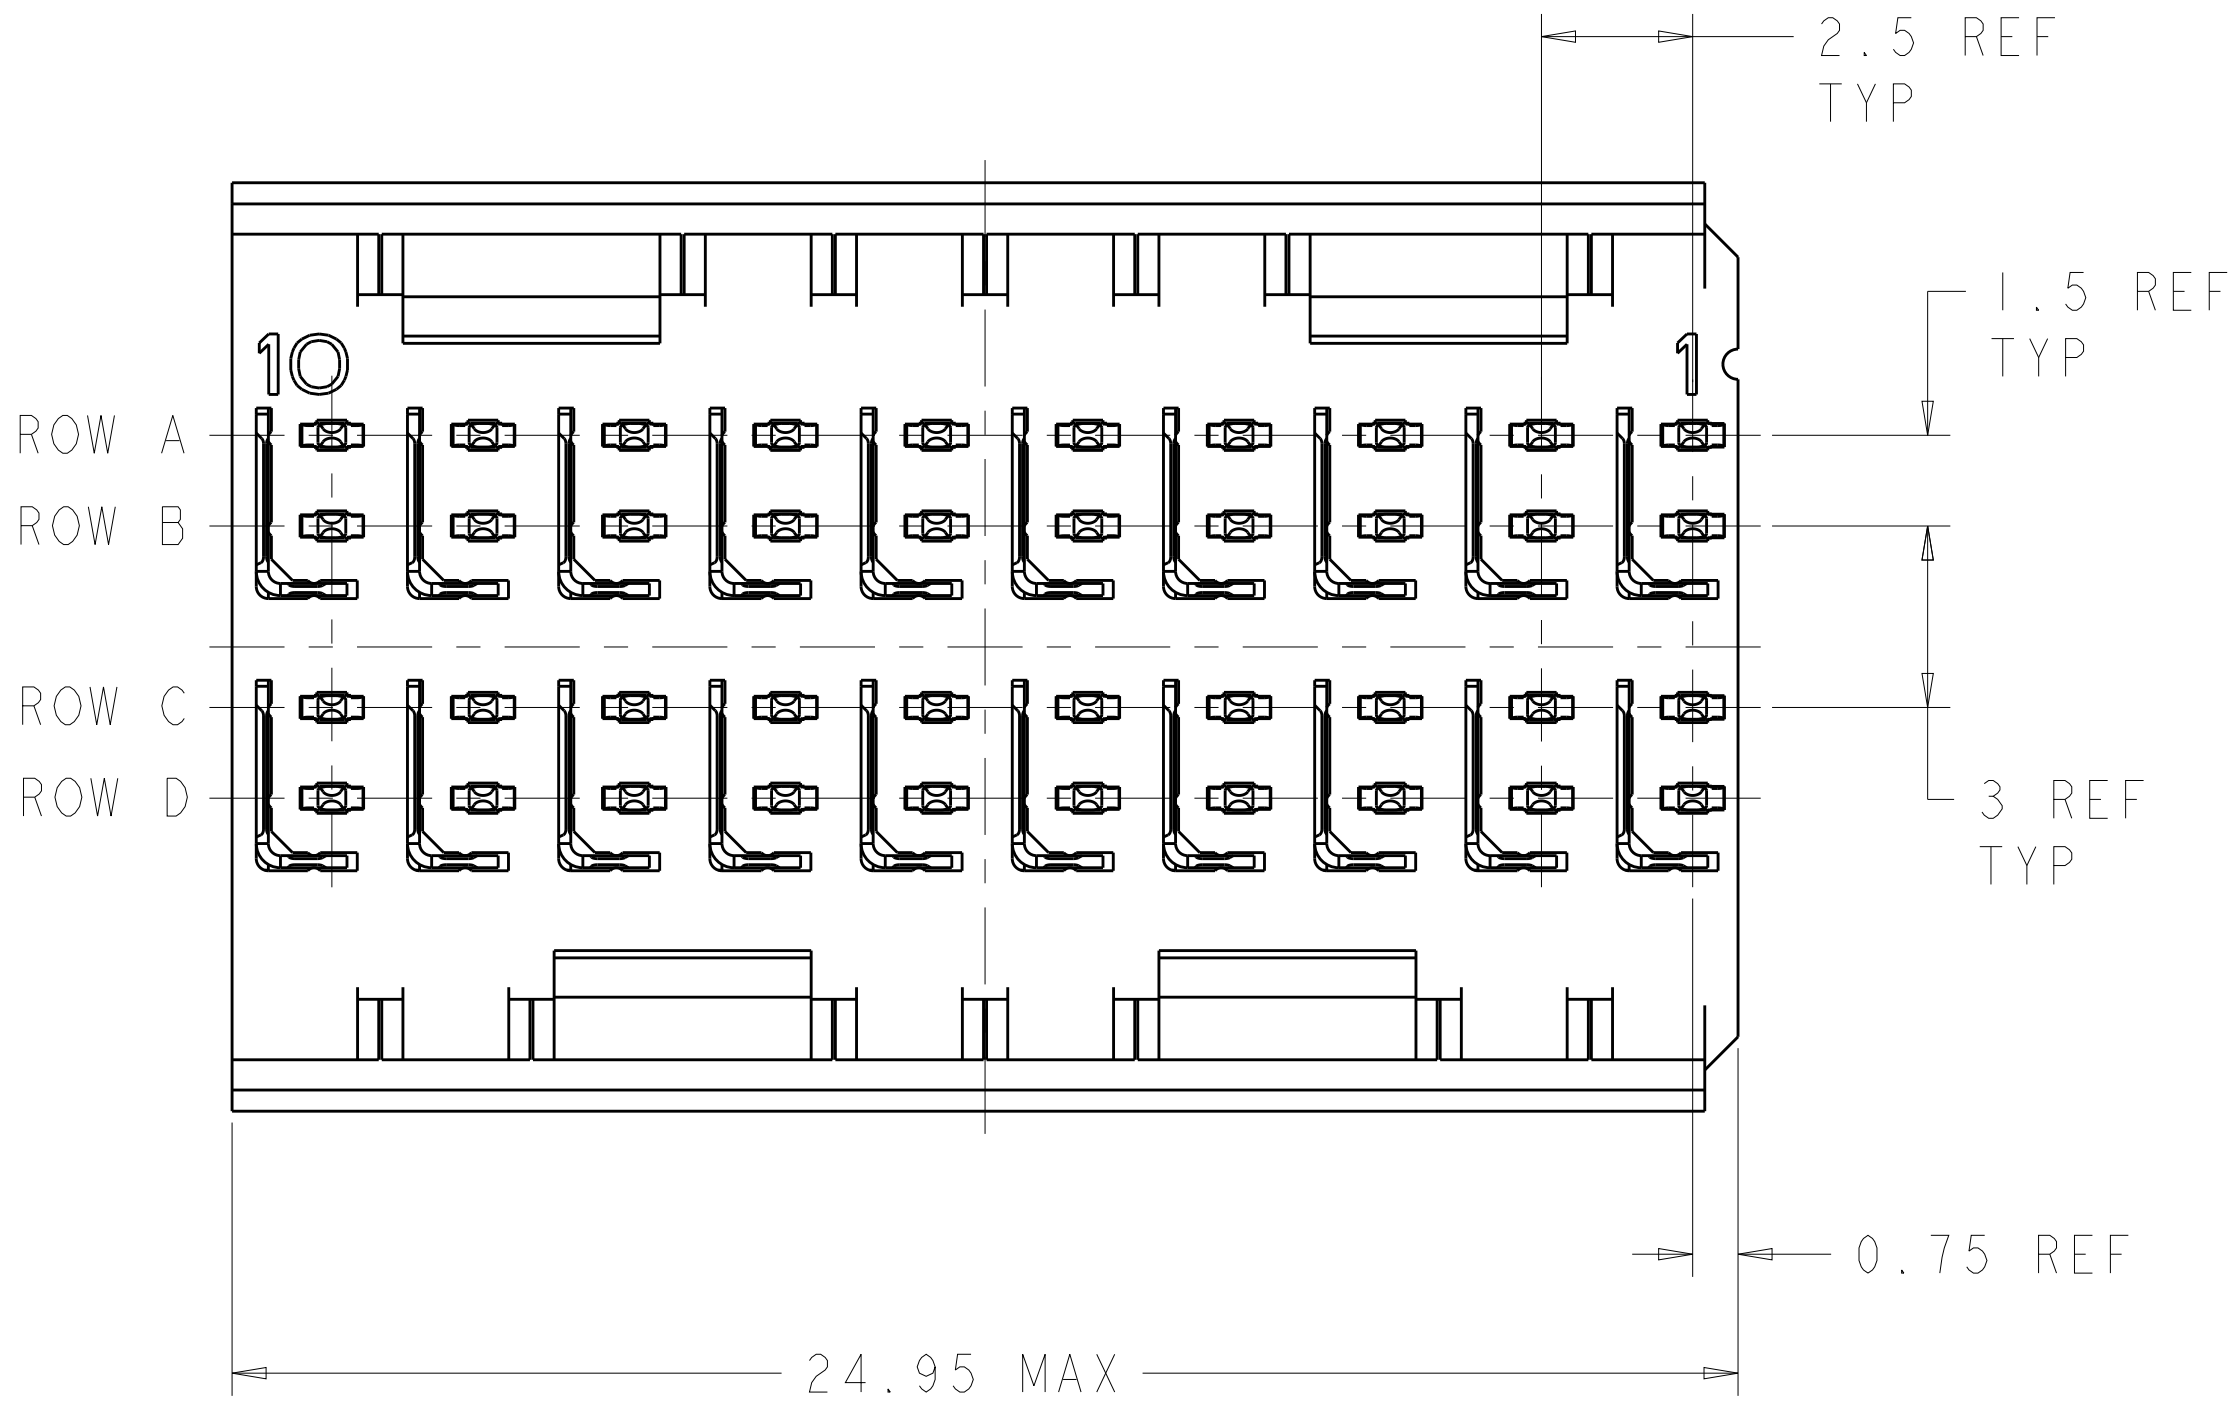

⌀ 0.05 X Y
ALL PLATED
THRU HOLES

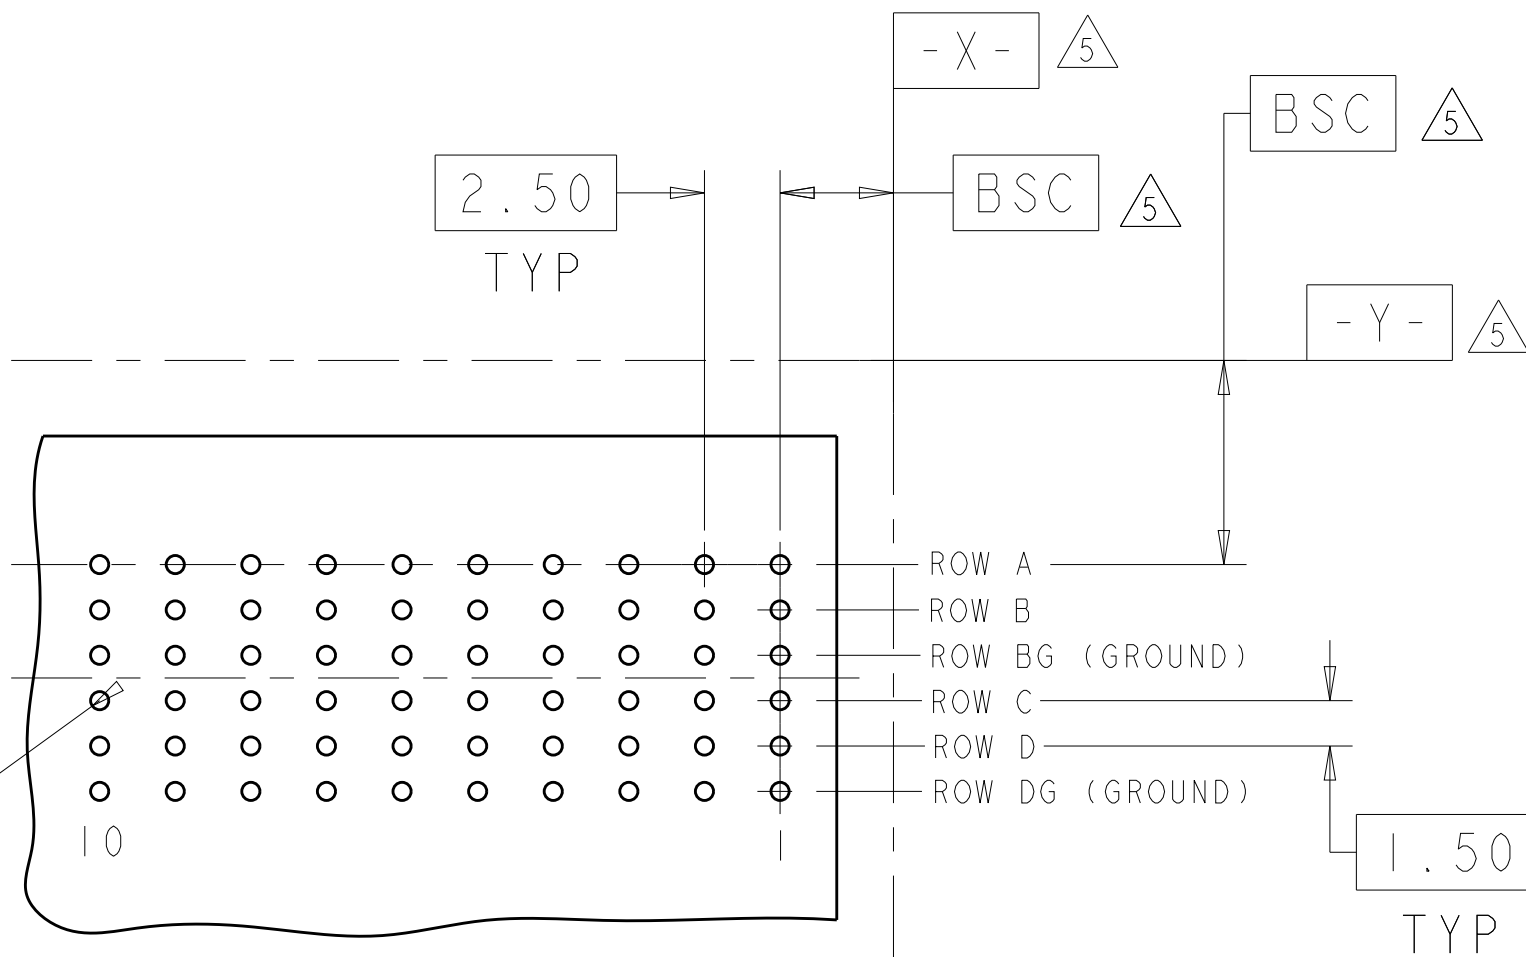

RECOMMENDED PC BOARD
LAYOUT, BACKPLANE,
COMPONENT SIDE SHOWN
SCALE 4:1

- △1 REFERENCE APPLICATION SPEC 114-13059 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESSES.
- △2 MATERIAL:
CONTACT AND SHIELD - PHOSPHOR BRONZE
HOUSING - GLASS FILLED POLYESTER. UL 94V-0.
- △3 FINISH: SIGNAL AND GROUND CONTACTS:
MATING AREA: MEETS THE PERFORMANCE REQUIREMENTS OF
PRODUCT SPECIFICATION 108-2055; BASED ON TELCORDIA
GR-1217-CORE, APPLICATIONS IN UNCONTROLLED
ENVIRONMENTS
COMPLIANT PIN AREA: 0.5 μm MIN MATTE
TIN OVER BASE PLATING
- △4 CONNECTOR MARKED WITH PART NUMBER AND DATE CODE.
- △5 DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- △6 THE TWO GROUNDS IN EACH COLUMN ARE COMMONED.
7. CONTACT AREA LUBRICATED WITH BELLCORE
APPROVED LUBRICANT. TECHNICAL REFERENCE:
GR-1217-CORE, ISSUE 1, NOVEMBER 1995.
- △8 TE OR TE CONNECTIVITY LOGO IS LOCATED.

3.80	6469025-2
5.30	6469025-1
DIM M	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. J. MAGARO CHK R. A. PATTERSON APVD R. PATTERSON	17JUN2004 17JUN2004 16AUG2007	TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
0 PLC 1 PLC 2 PLC 3 PLC 4 PLC ANGLES FINISH		±0.10 ±0.10 ±0.10 ±0.10 ±0.10 ±0.10 ±0.10		PRODUCT SPEC APPLICATION SPEC	
MATERIAL		WEIGHT		SIZE CAGE CODE DRAWING NO	
CUSTOMER DRAWING		SCALE 8:1		SHEET 1 OF 1	
				REV C	