

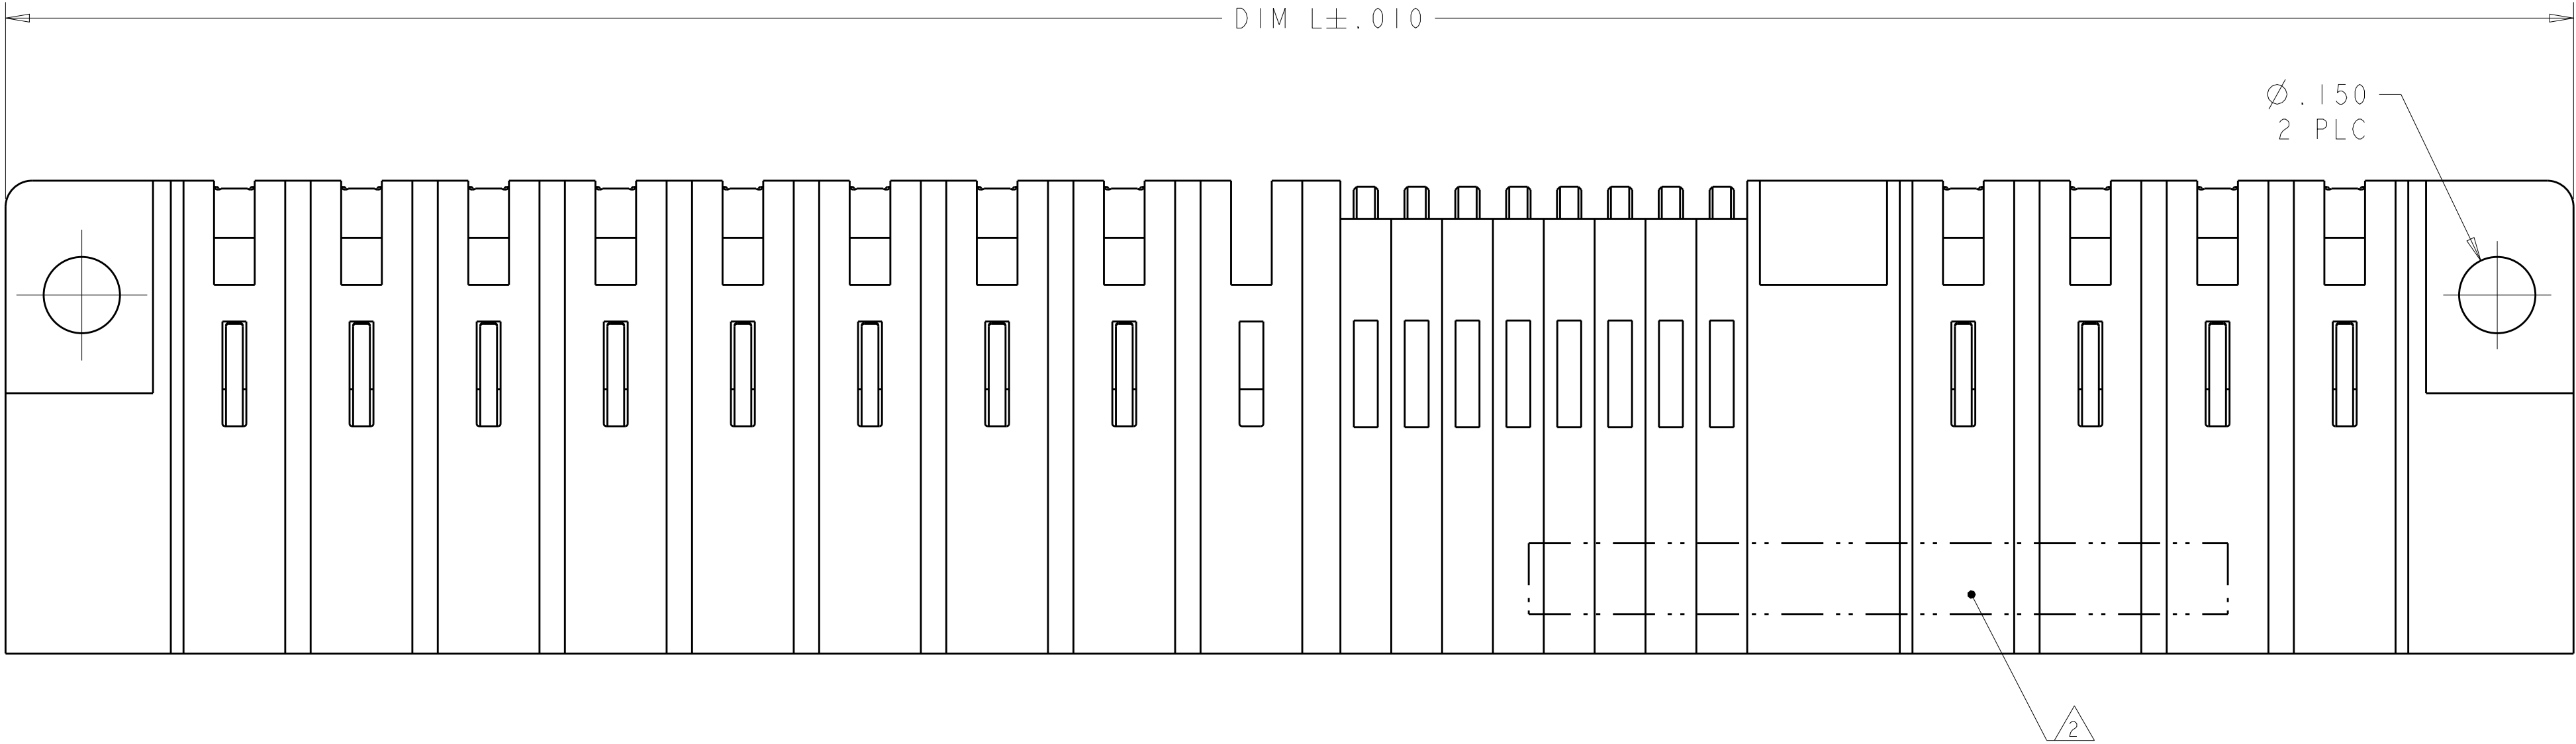
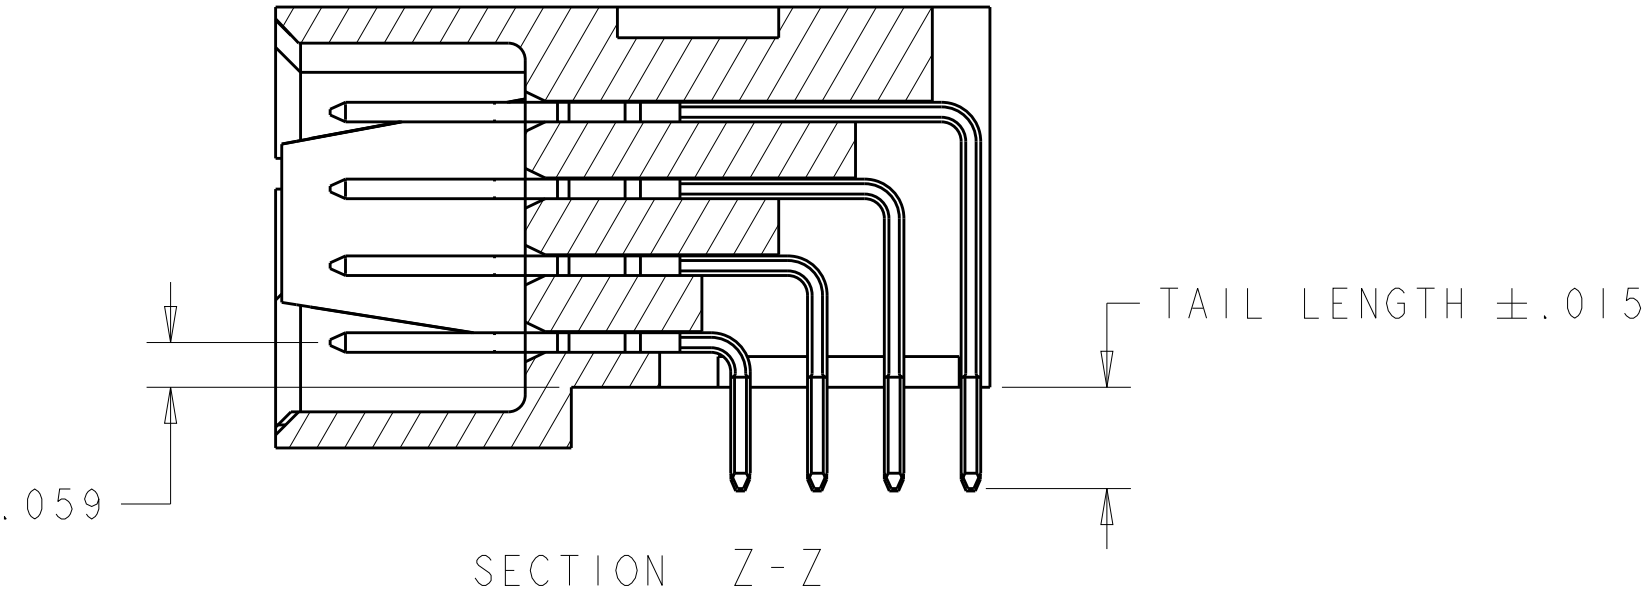


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
E6		REVISED FOR 1-2	16MAY2014	CZ	SZ
E7		ADD NEW DASH NUMBER 1-4	02JAN2015	CZ	SZ

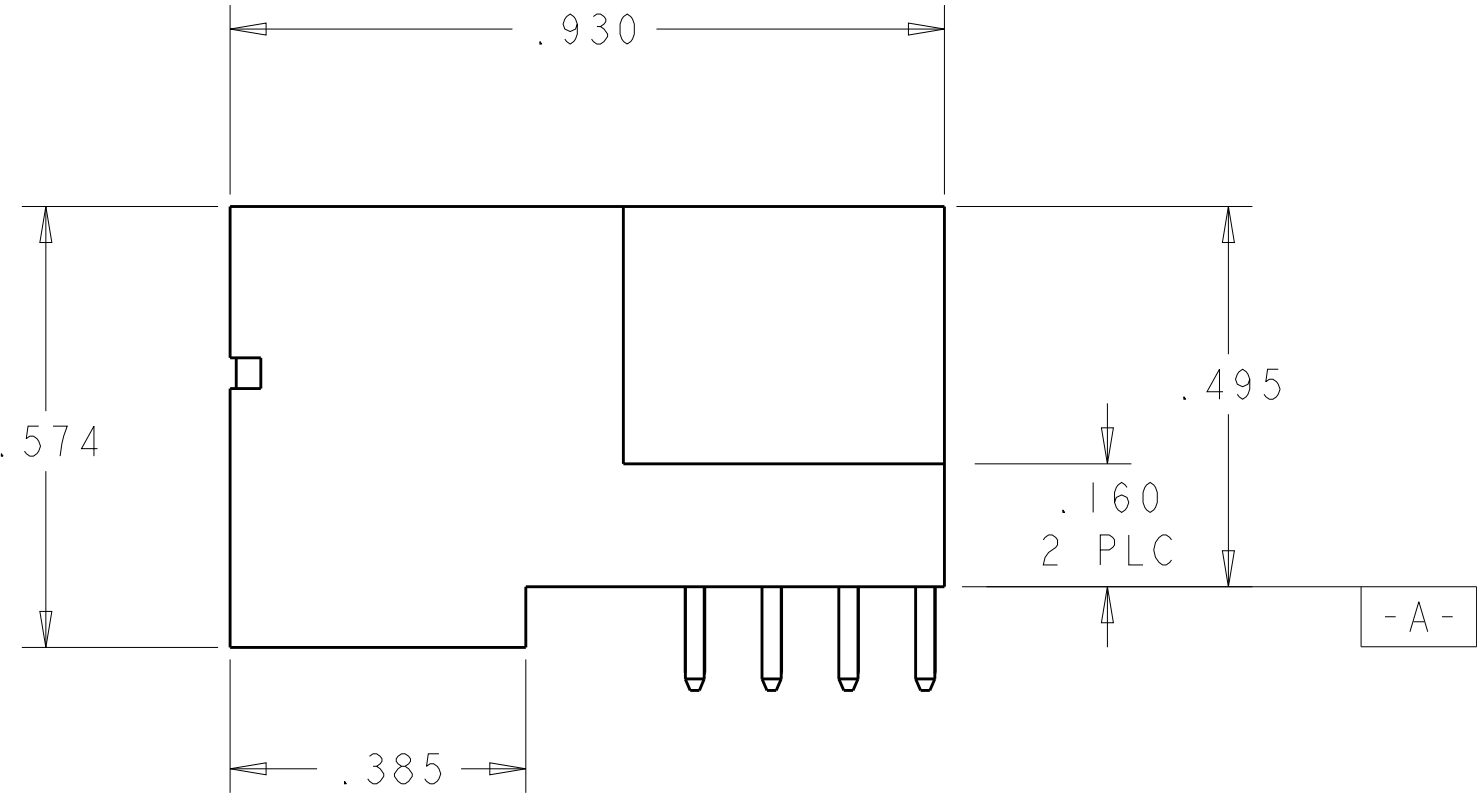


- 1 OPTIONAL CENTER MODULE
- 2 "AMP", PART NUMBER, AND DATE CODE TO BE MARKED IN AREA SHOWN. PARTS UNDER 2.00 LONG MAY BE MARKED ON BOTH SIDES.
- 3 MATERIAL: HOUSING - GLASS FILLED HIGH TEMP THERMO PLASTIC, UL94 V-0
SIGNAL CONTACT - COPPER ALLOY
POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
- 4 CONTACT PLATING: SIGNAL CONTACTS - .000050 MIN NI UNDER ALL.
.000030 MIN Au ON CONTACT AREA.
.000100 MIN Sn AT PCB INTERFACE.
POWER CONTACTS - .000050 MIN NI UNDER ALL.
.000030 MIN Au ON CONTACT AREA.
.000100 MIN Sn AT PCB INTERFACE.
- 5 MECHANICAL CONNECTOR KEEP OUT ZONE.
- 6 DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- 7 PCB - ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 8 PCB - .0453 +/- .0010 DRILLED HOLES PLATES WITH .0003 MIN Sn OVER .001 TO .003 PLATING TO ACHIEVE A .040 DIA. HOLE.
- 9 VARIABLE DIMENSIONS SHOW ON VIEW (SHEET 5).

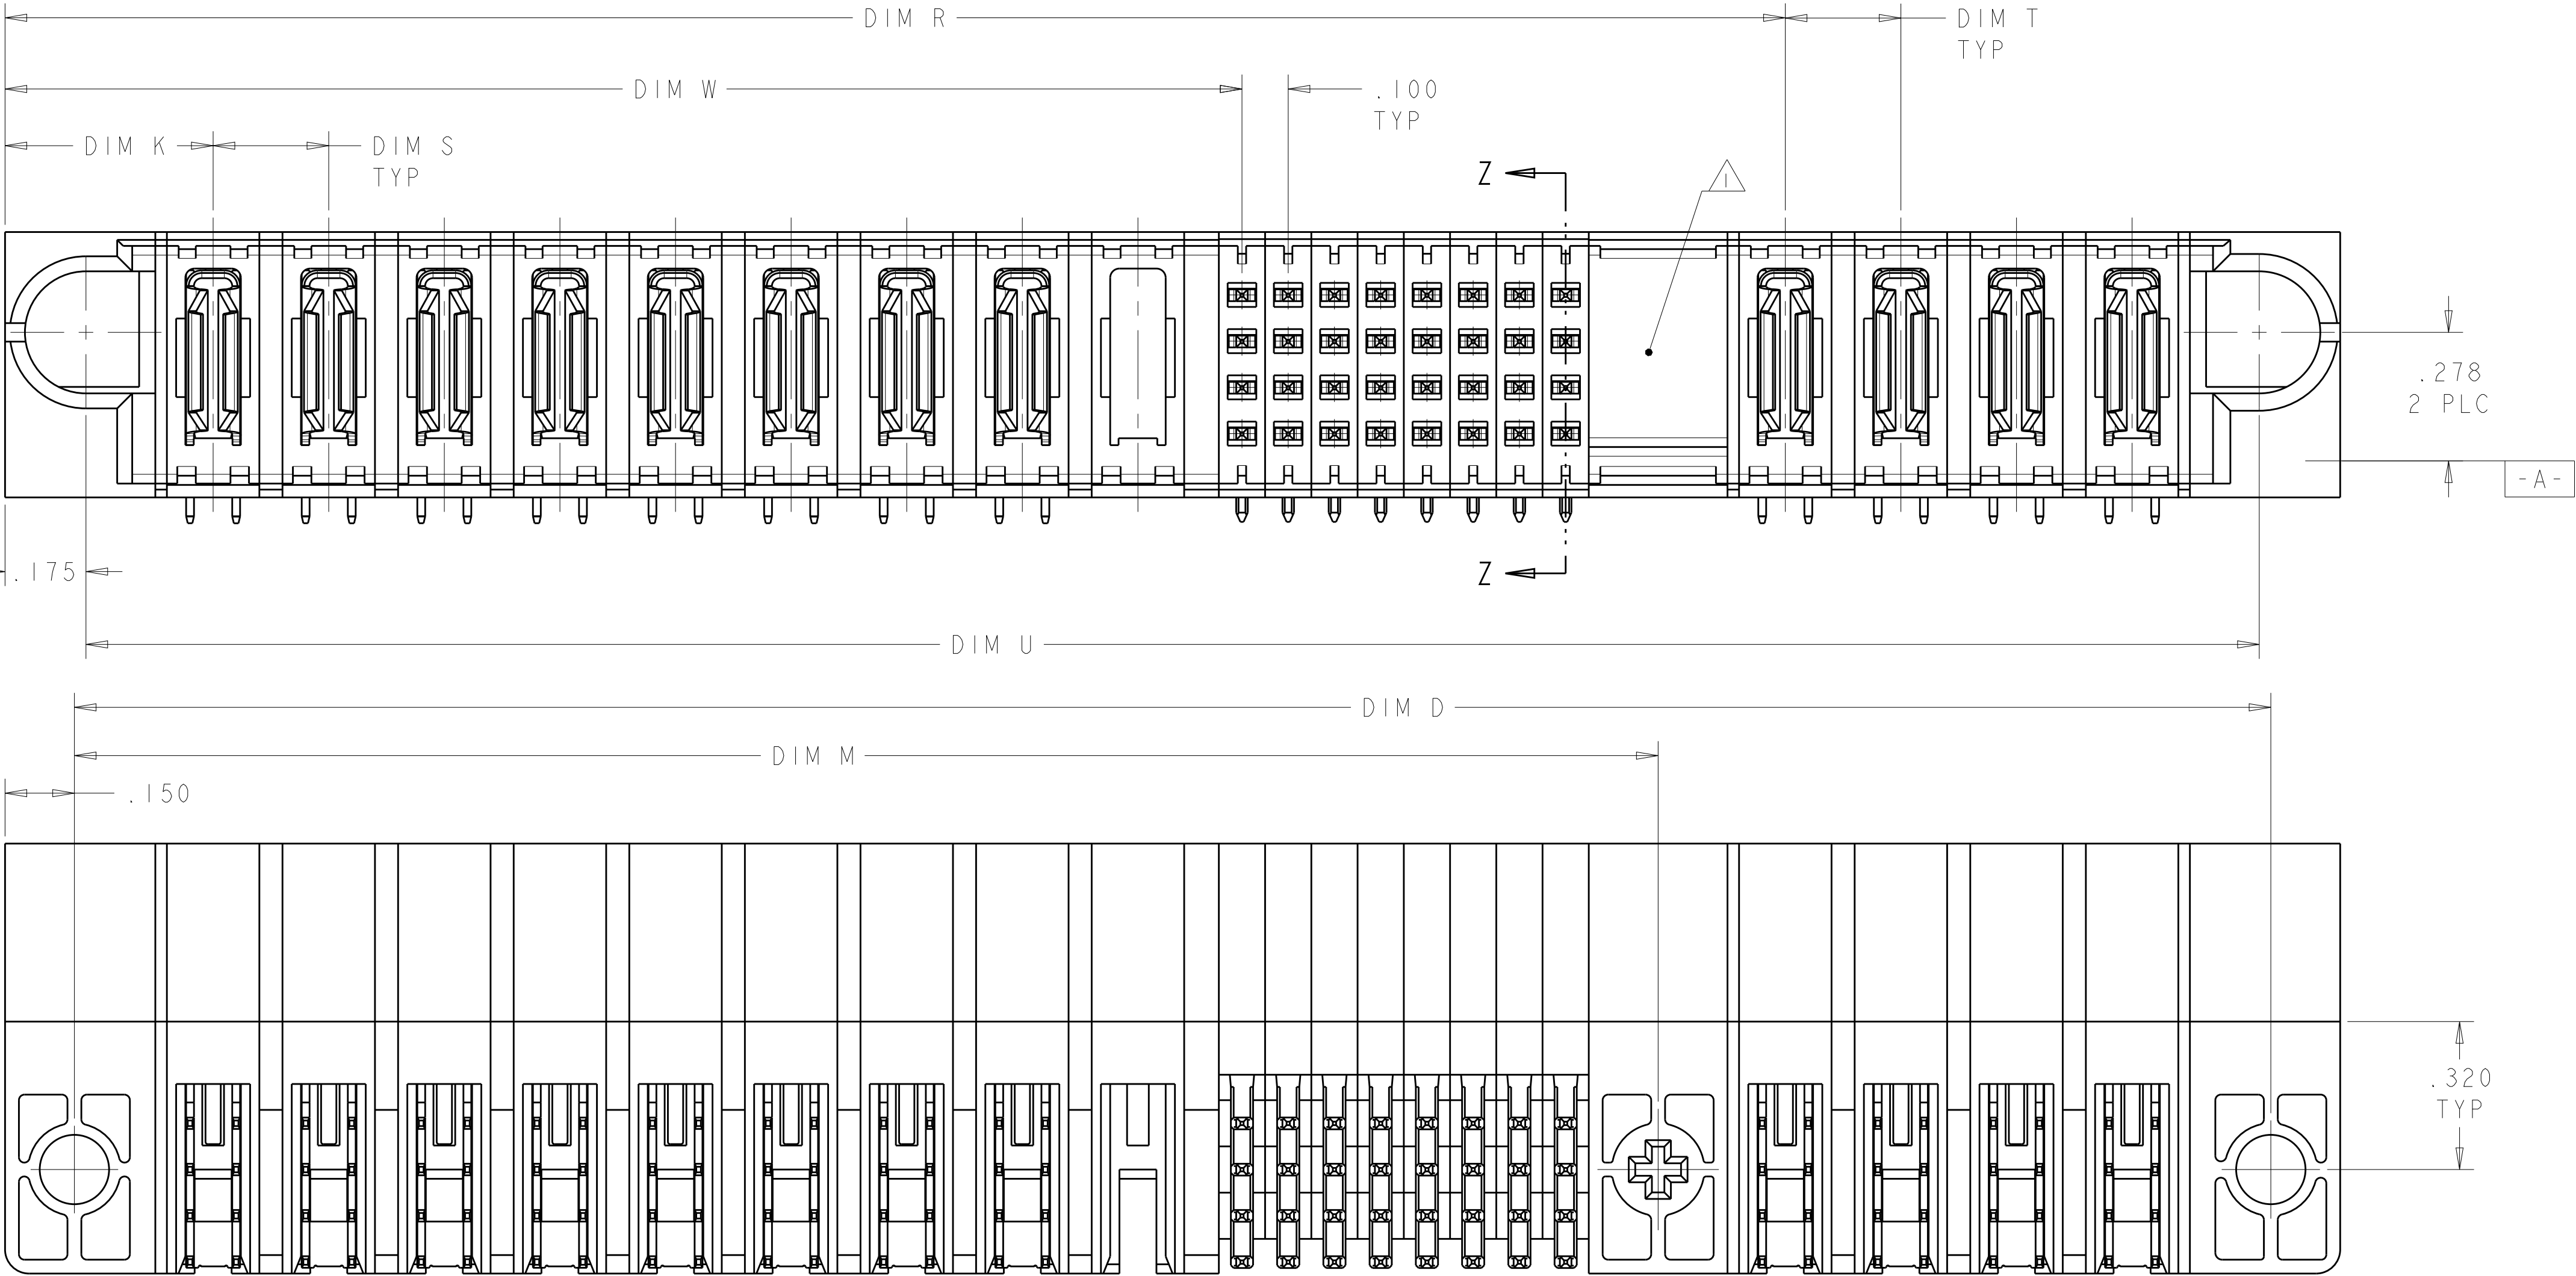


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. GRZYBOWSKI 13JUN05 CHK M. PERCHERKE 13JUN05 APVD M. PERCHERKE -	TE Connectivity	
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	PRODUCT SPEC 108-1973	NAME RIGHT ANGLE HEADER W/GUIDES ASSEMBLY MULTI-BEAM XL (DUAL-BEAM POWER)	
	0 PLC ±" 1 PLC ±.01 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±2° FINISH	APPLICATION SPEC 114-13038	SIZE A1	RESTRICTED TO -
MATERIAL	3	WEIGHT	CAGE CODE DRAWING NO C=6600132	SCALE 4:1
CUSTOMER DRAWING		SHEET 1 OF 7		REV E7

REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN
-	-	SEE SHEET 1	-	-

PART NUMBER	ROWS		POWER		SIGNAL						POWER		
			P1	P2	1	2	3	4	5	6	P3	P4	
6600132-1	D		PS	PS	J	J	J	J	J	J	PS	PS	
	C				K	K	K	K	K	K			
	B				N	N	N	G	N	N			
	A				S	S	S	S	S	S			
2P + 24S + 2P													

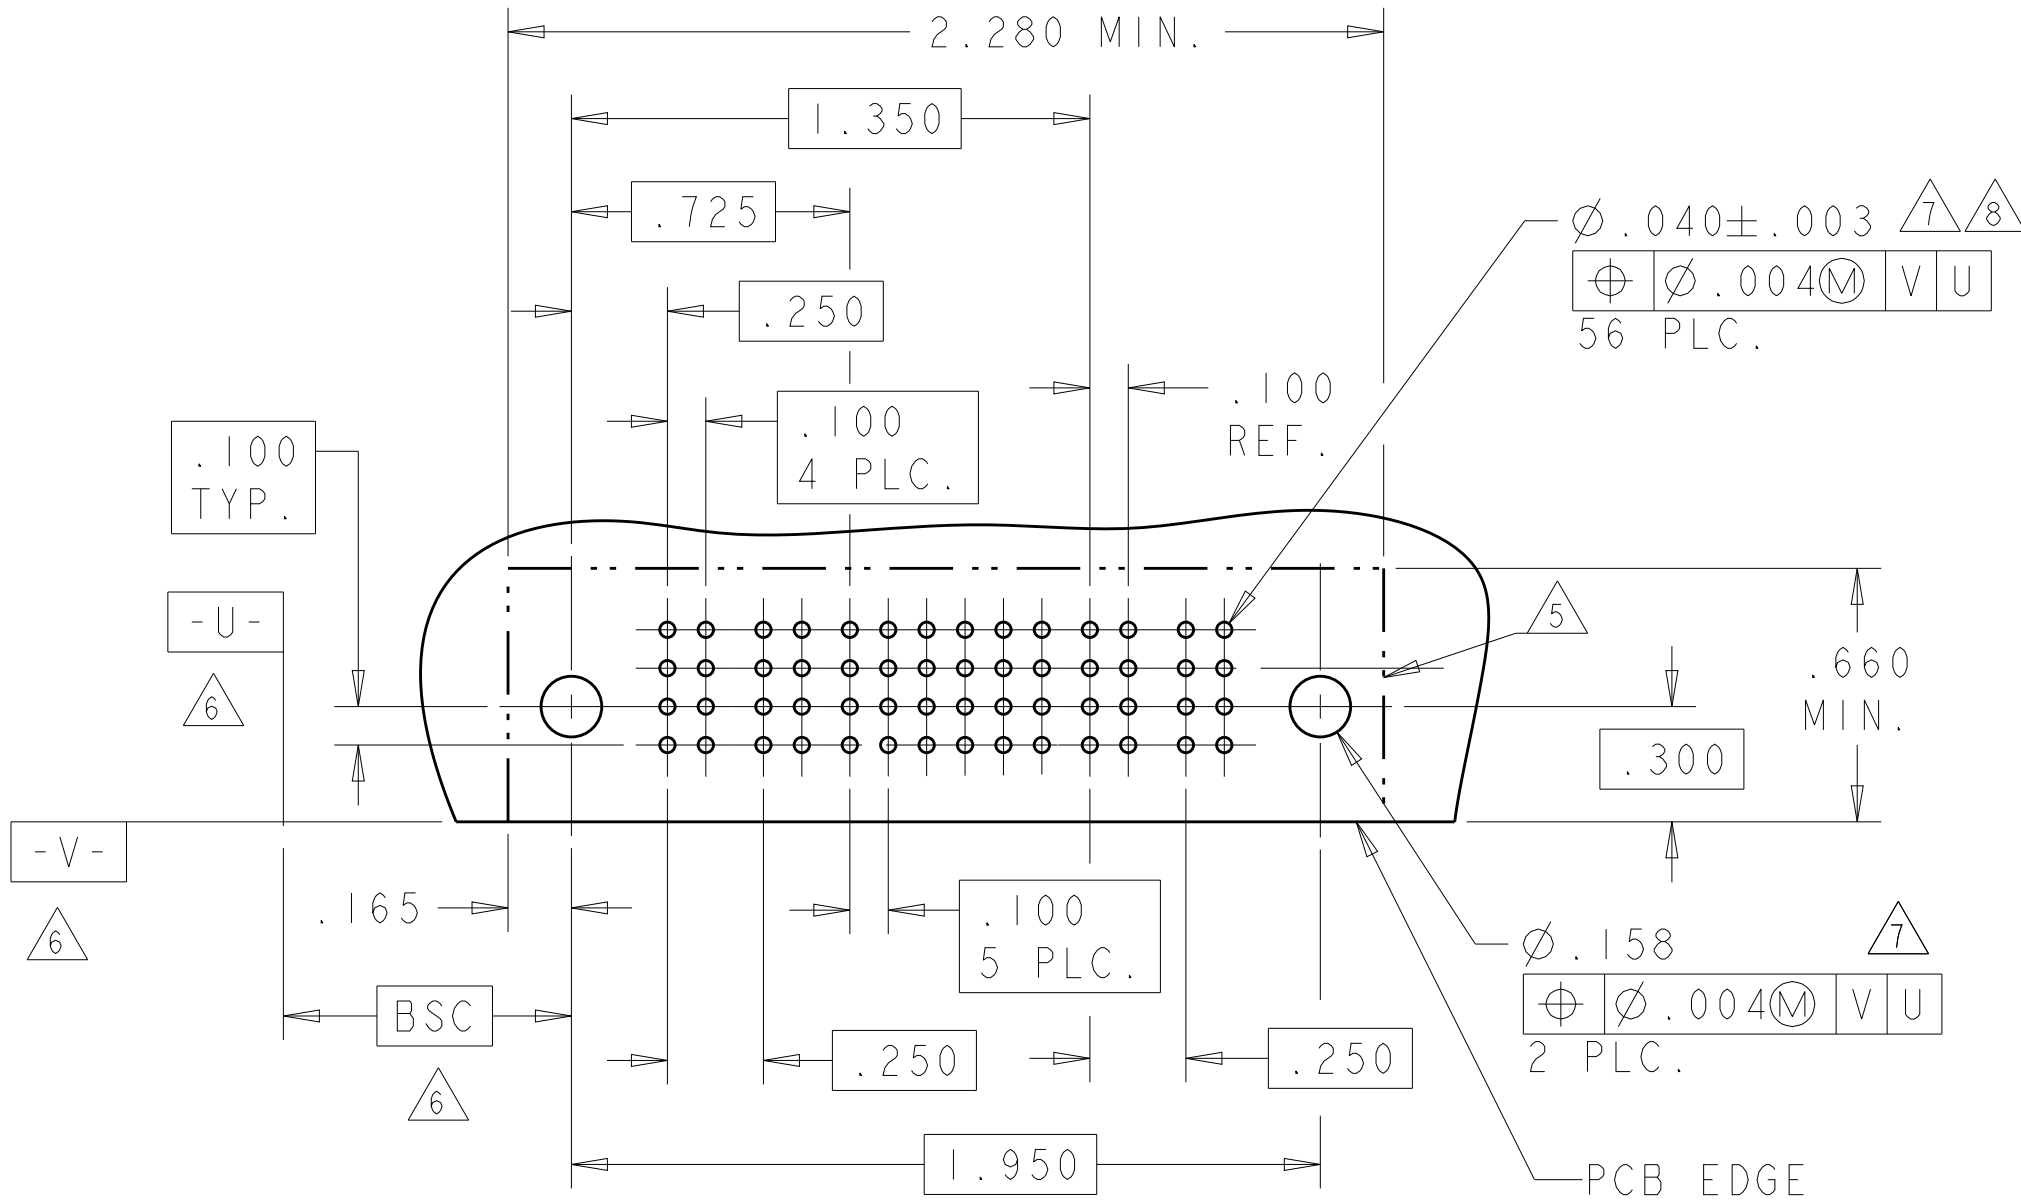

PART NUMBER	ROWS		POWER			SIGNAL						POWER						
			P1	P2	P3	1	2	3	4	5	6	P4	P5	P6	P7	P8	P9	
6600132-2	D					J	J	J	J	J	J							
	K					K	K	K	K	K								
	N					N	N	N	N	N								
	H					S	S	S	S	S								
3ACP + 24S + 6P																		

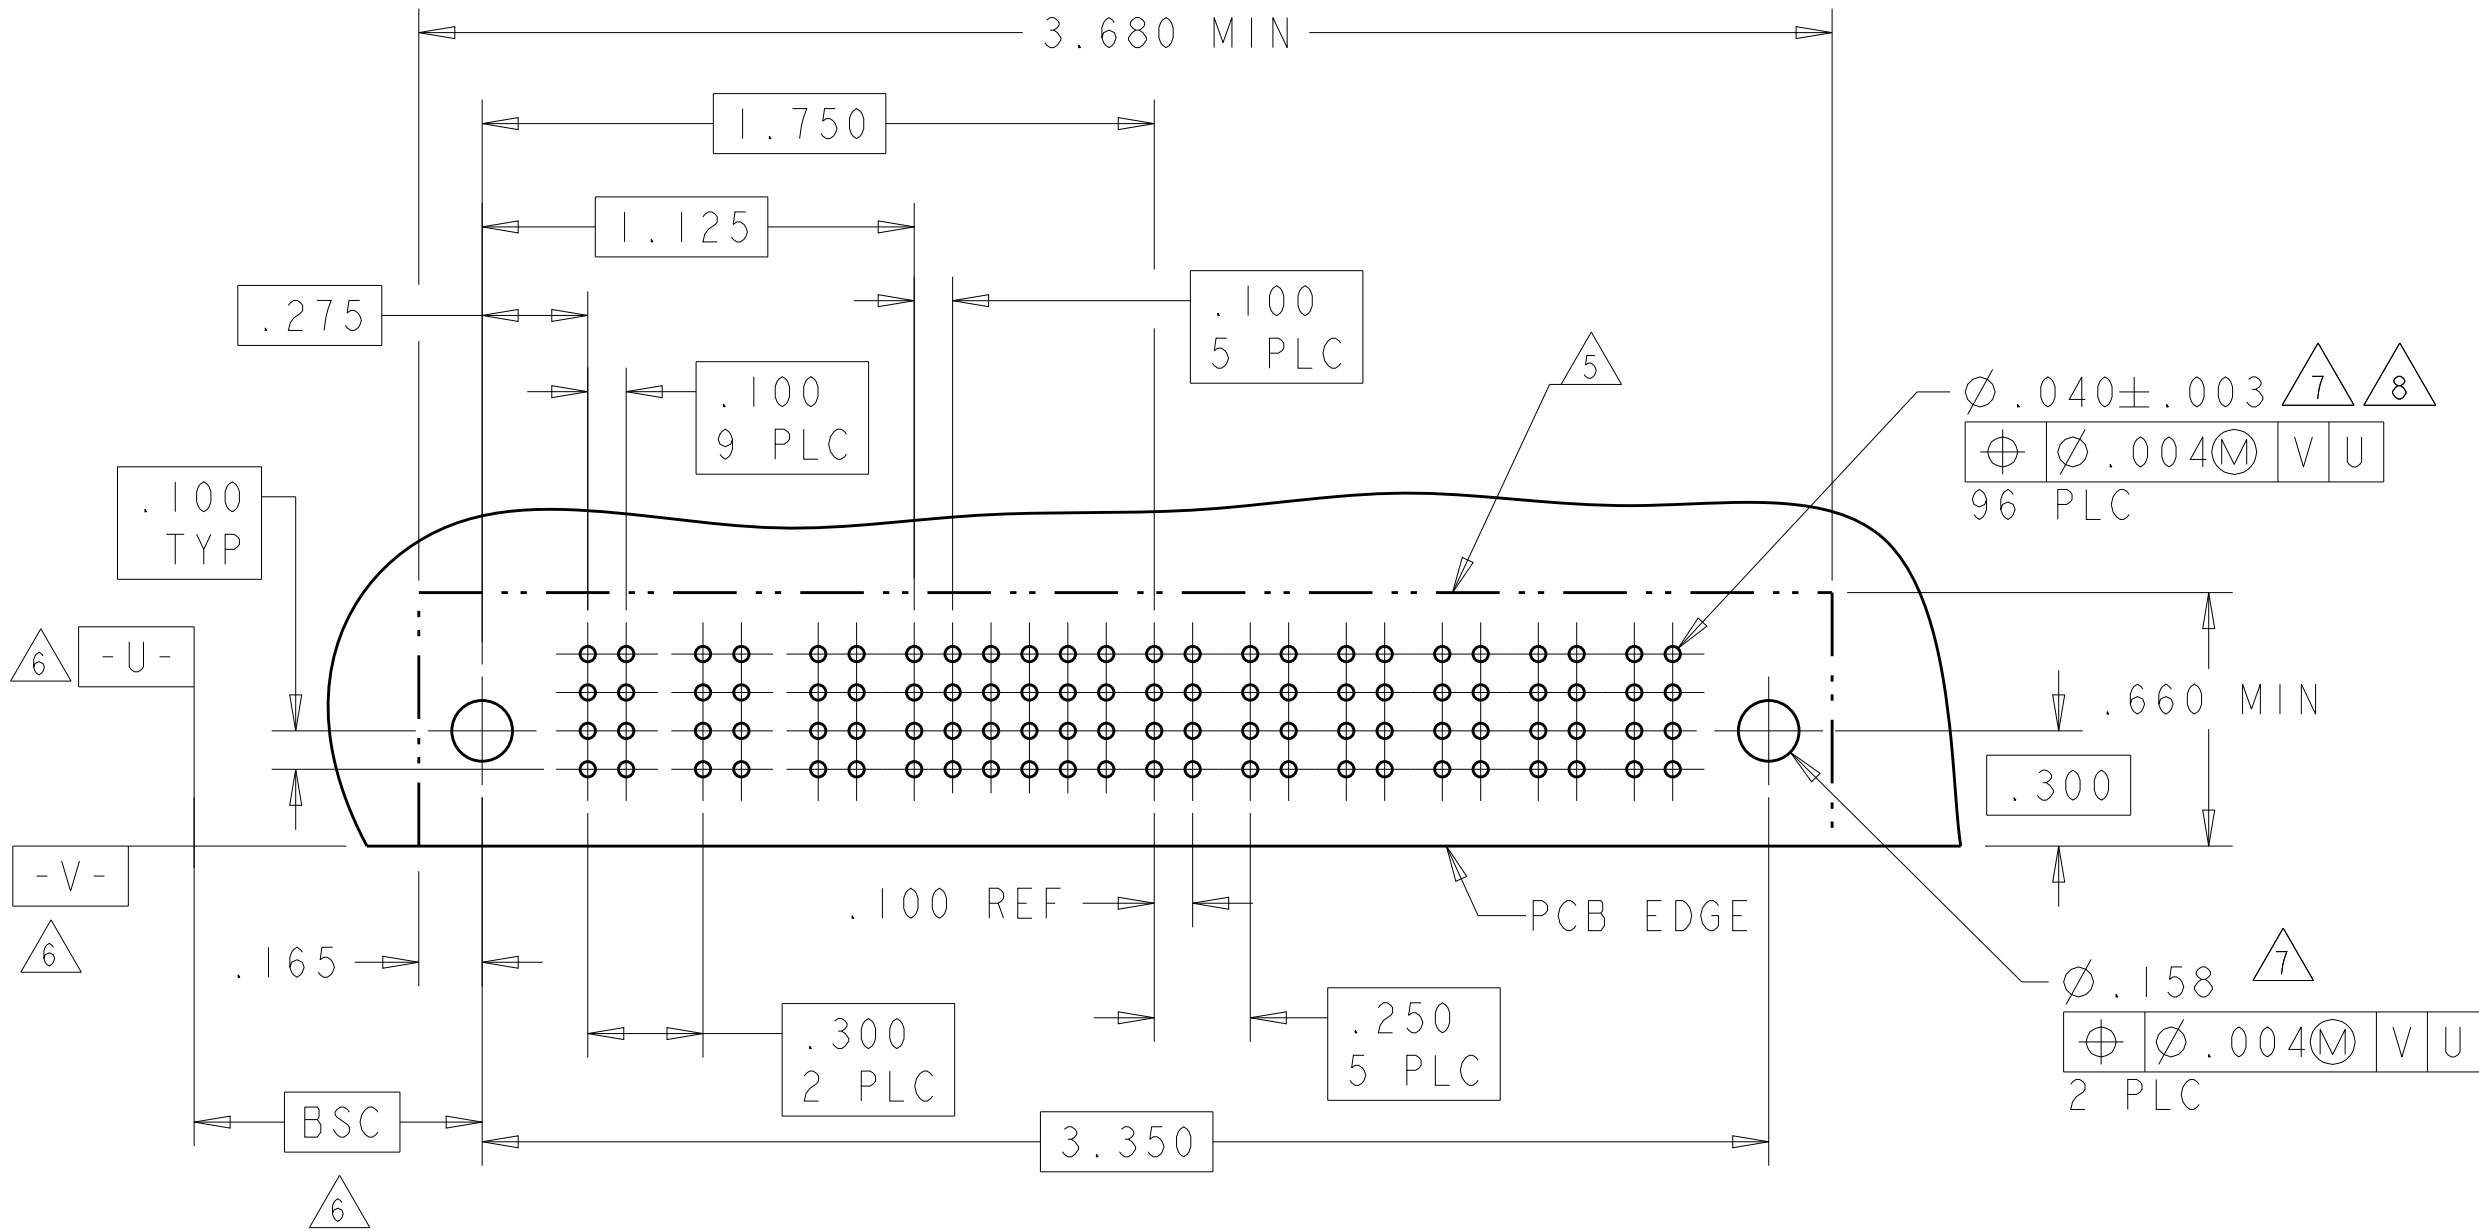

FK	MFBL	.135	C
A4	MLBF	.090	D
A3	MLBF	.090	C
A2	MLBF	.090	B
A1	MLBF	.090	A
E	MLBF	.135	D
F	MLBF	.135	C
G	MLBF	.135	B
H	MLBF	.135	A
Z	STD	.090	D
Y	STD	.090	C
R	STD	.090	B
O	STD	.090	A
J	STD	.135	D
K	STD	.135	C
N	STD	.135	B
S	STD	.135	A
CODE	MATING SEQUENCE	TAIL LENGTH	ROW
SIGNAL CONTACT			

PL	.090
PS	.135
CODE	TAIL LENGTH
POWER CONTACT	

2.900	.250	.250	2.050	1.375	2.950	-	3.250	.450	4P + 24S + 4P	1-6600132-4
2.200	.250	.250	1.350	.875	2.250	-	2.550	.450	2P + 16S + 4P	1-6600132-2
1.900	.250	.250	1.550	.875	1.950	-	2.250	.450	2P + 24S + 2P	1-6600132-1
1.200	-	-	1.100	.625	1.250	-	1.550	.450	1P + 16S + 1P	1-6600132-0
2.200	.200	.200	1.725	1.025	2.250	-	2.550	.425	3P + 24S + 3P	6600132-9
3.550	.200	△	2.225	1.925	3.600	-	3.900	.500	7P + 8S + 7P	6600132-7
2.500	.250	.250	2.150	1.425	2.550	-	2.850	.450	4P + 24S + 2P	6600132-6
4.500	.250	.250	2.900	2.125	4.550	-	4.850	.450	7P + 28S + 7P	6600132-5
1.575	-	-	1.425	.700	1.625	-	1.925	.475	1P + 24S + 1P	6600132-4
1.575	.250	.250	1.425	.700	1.625	-	1.925	.475	1P + 24S + 1P	6600132-3
3.300	.300	.250	1.950	1.275	3.350	-	3.650	.475	3ACP + 24S + 6P	6600132-2
1.900	.250	.250	1.550	0.875	1.950	-	2.250	.450	2P + 24S + 2P	6600132-1
DIM U	S	T	R	W	D	M	L	K	DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN R. GRZYBOWSKI 13JUN05
CHK M. PERCHERKE 13JUN05
APVD W. PERCHERKE -

DIMENSIONS:
INCHES

MATERIAL -

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±.01
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.002
ANGLES ±.020
FINISH -

PRODUCT SPEC 108-1973
APPLICATION SPEC 114-13038
WEIGHT -

NAME

SIZE A1

CAGE CODE -

DRAWING NO. 6600132

RESTRICTED TO -

TE Connectivity

RIGHT ANGLE HEADER W/GUIDES ASSEMBLY
MULTI-BEAM XL
(DUAL-BEAM POWER)

SCALE 4:1



SHEET 2 OF 7

REV E7

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-


PART NUMBER	ROWS		POWER	SIGNAL						POWER	
			P1	1	2	3	4	5	6	P2	
6600132-3	D C B A		PS	J	J	J	J	J	J	PS	
				K	K	K	K	K	K		
				N	N	G	G	N	G		
				S	S	H	S	S	S		
IP + 24S + IP											

PART NUMBER	ROWS		POWER	SIGNAL						POWER	
			P1	1	2	3	4	5	6	P2	
6600132-4	D C B A		PS	J	J	J	J	J	J	PS	
				K	K	K	K	K	K		
				N	N	N	G	N	N		
				S	S	S	S	S	S		
IP + 24S + IP											

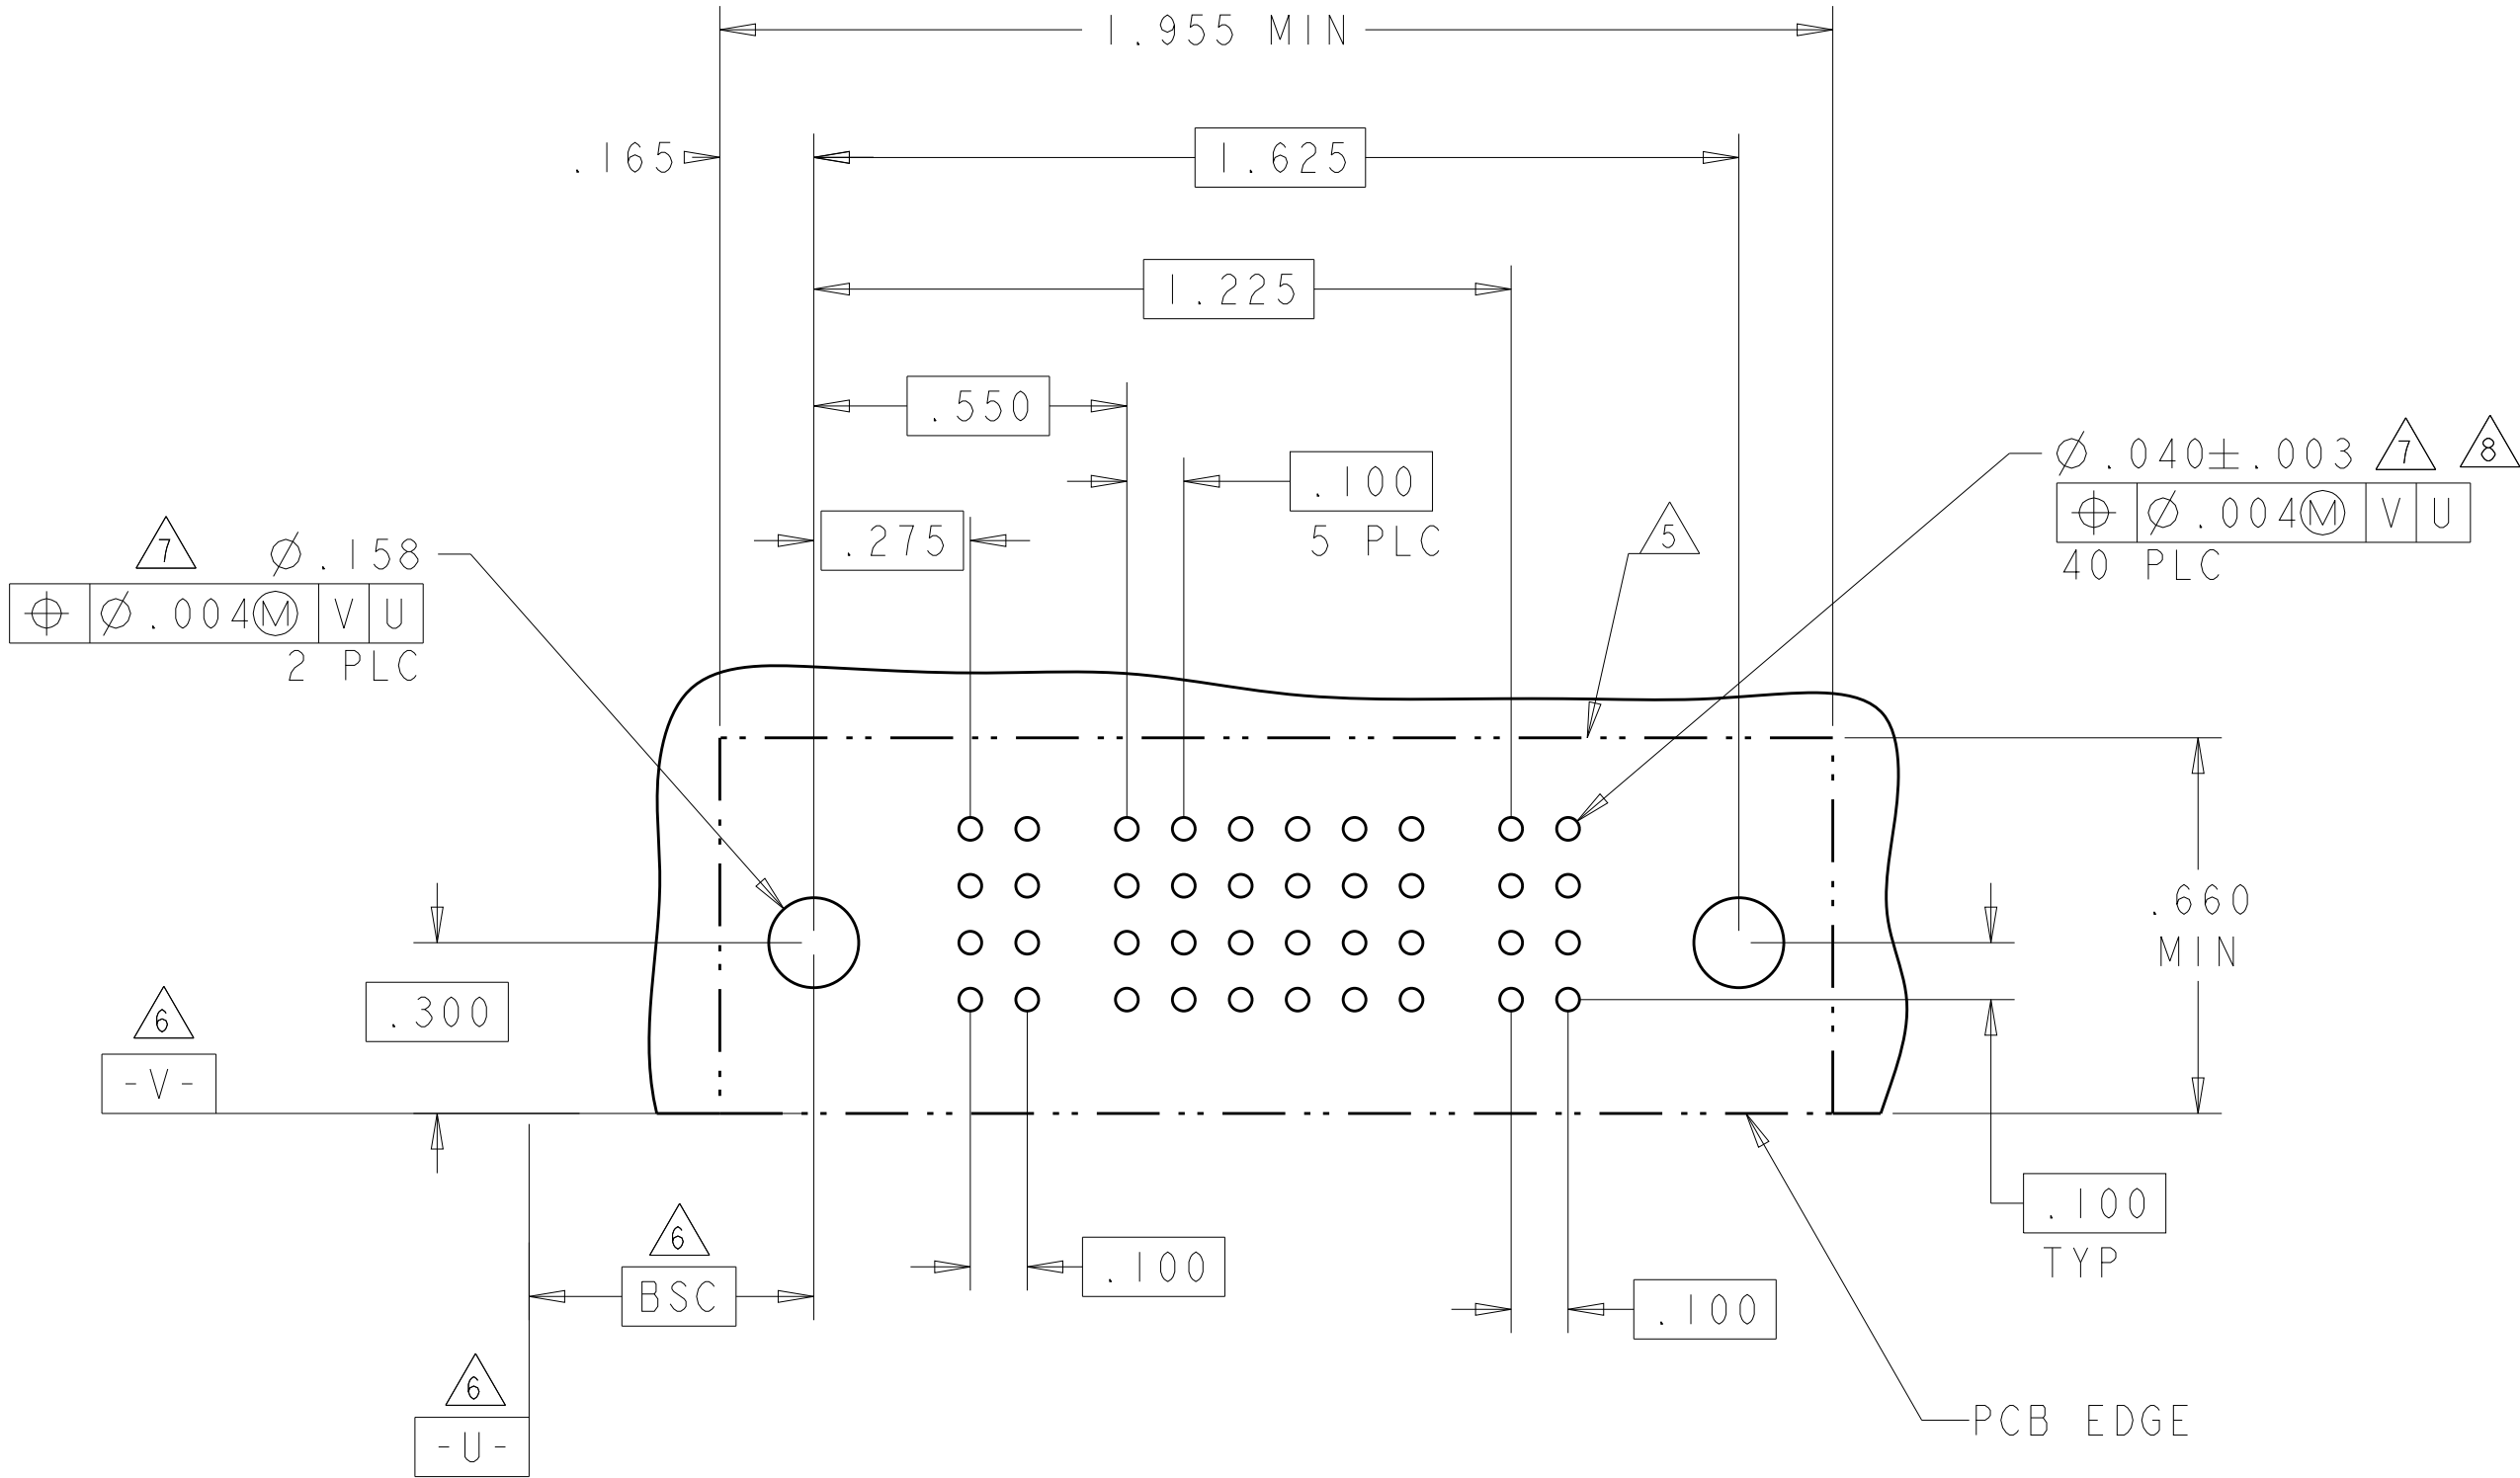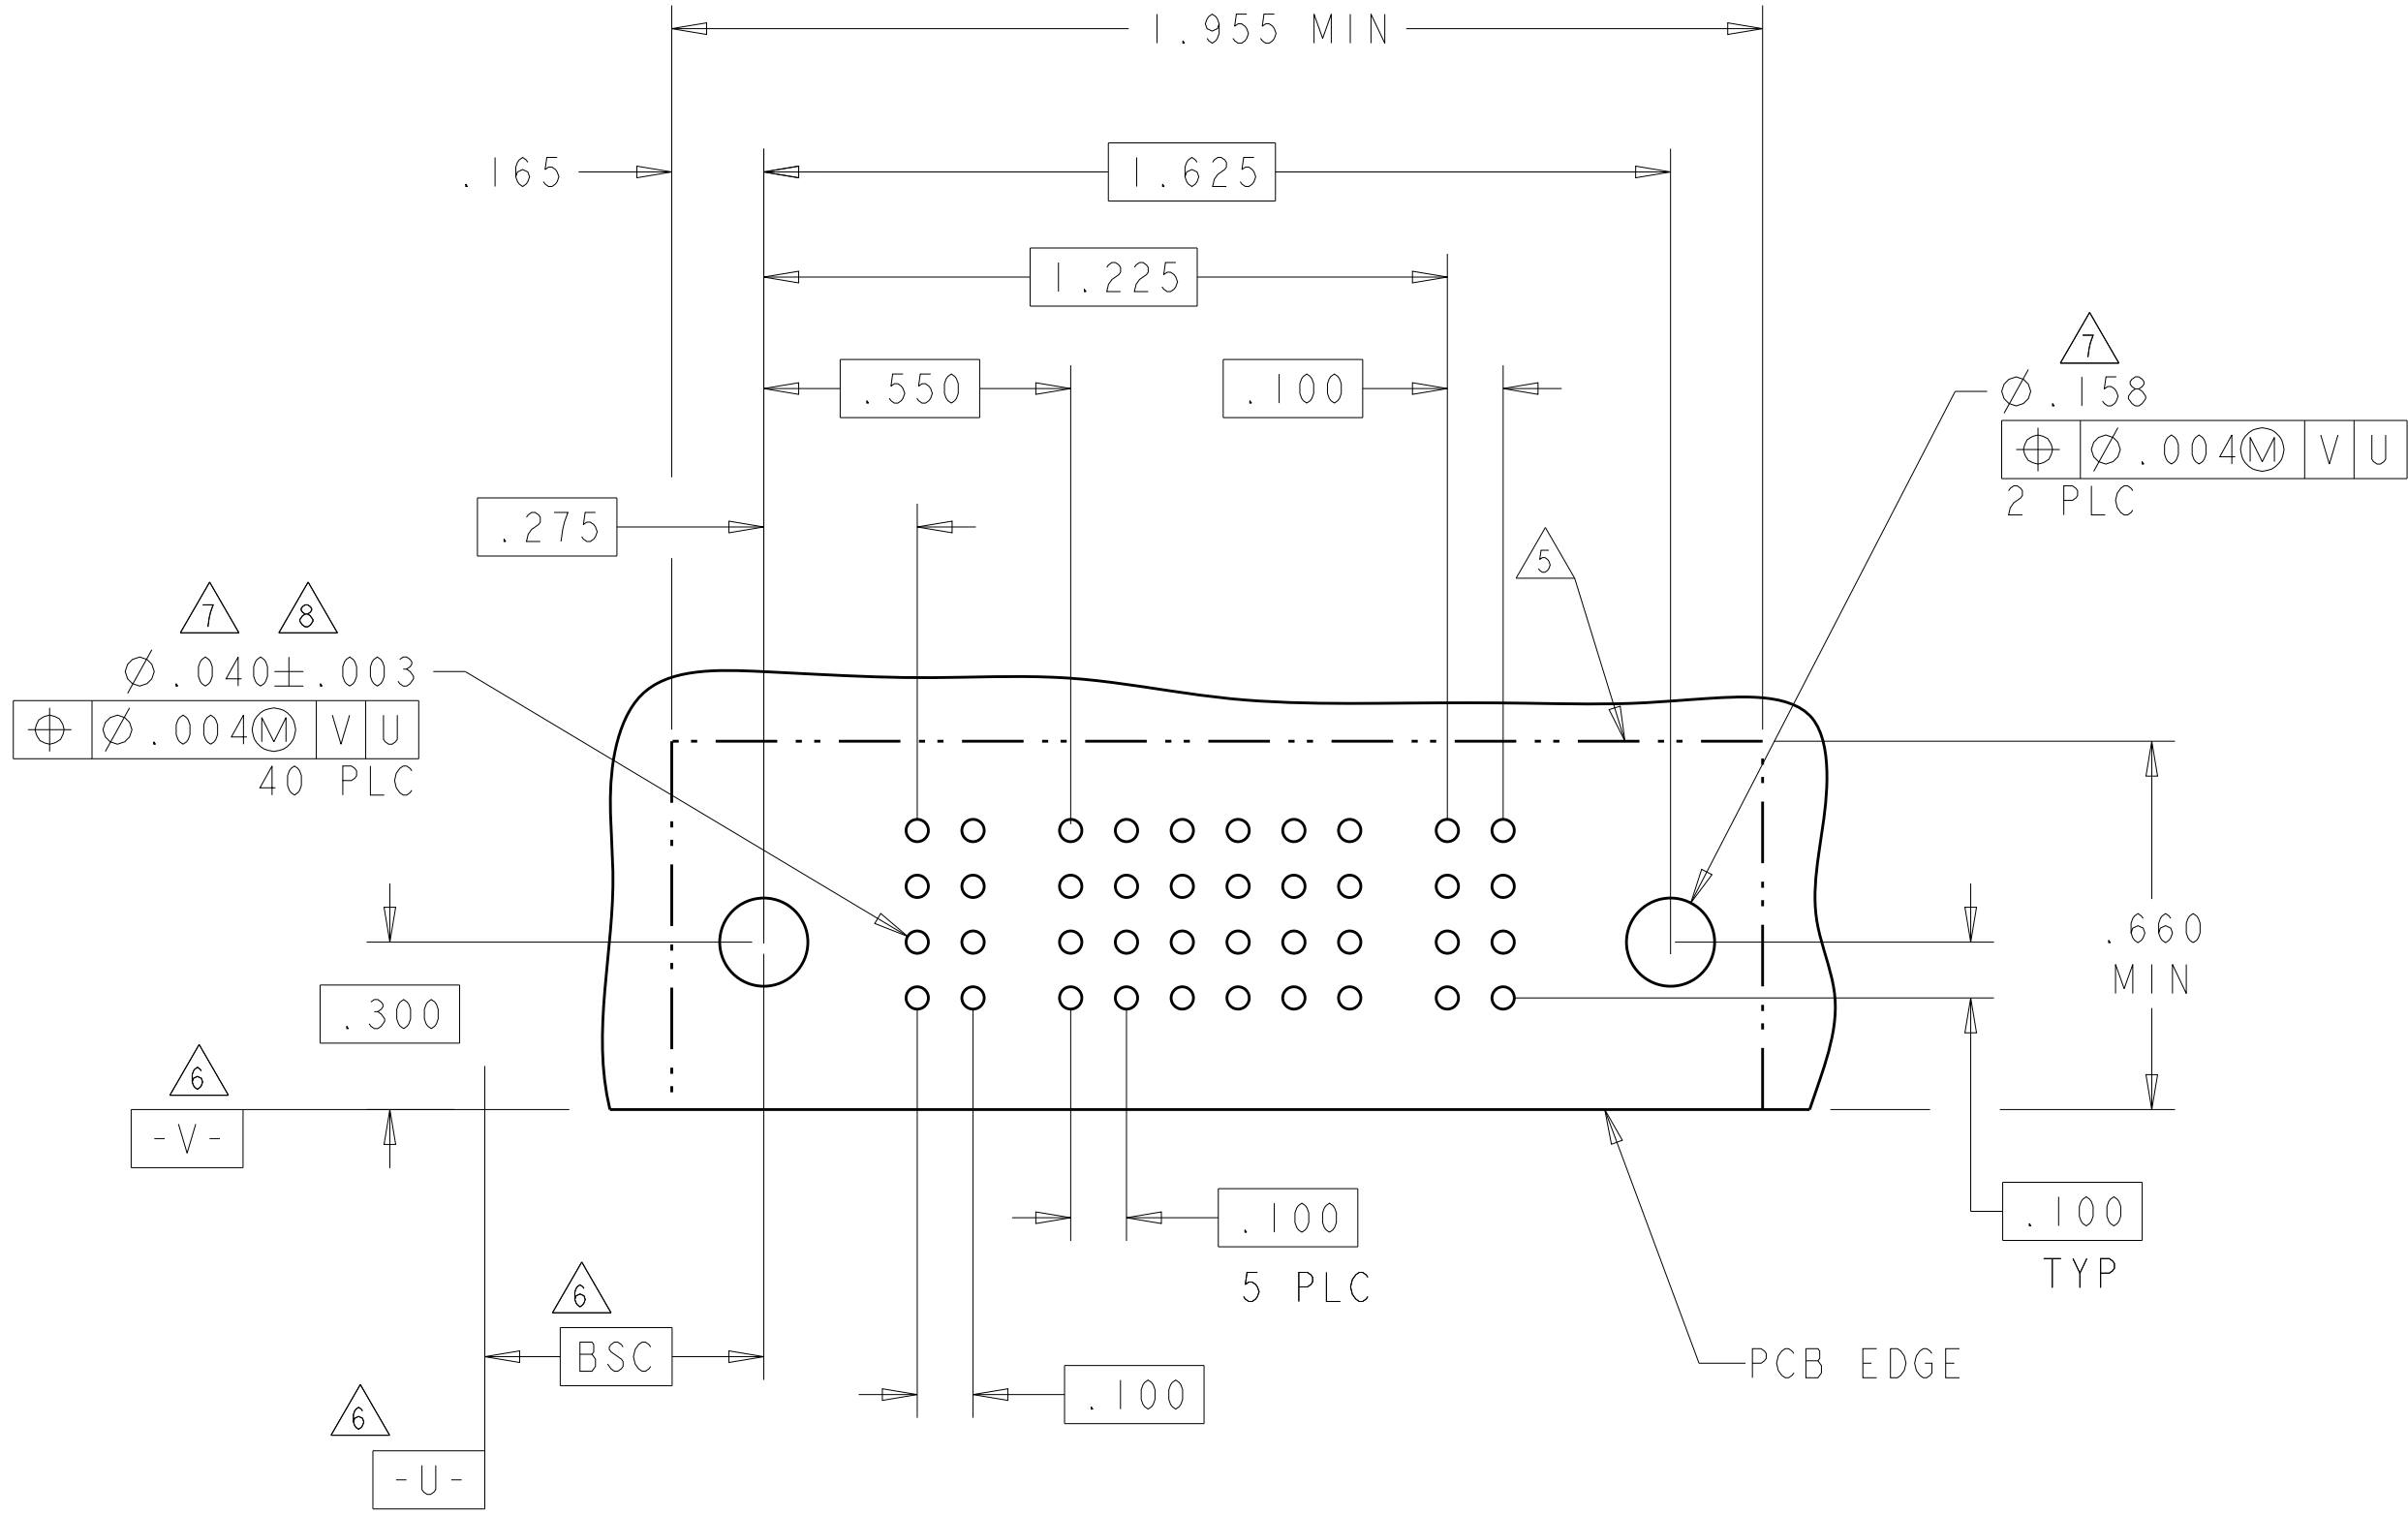


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-


PART NUMBER	ROWS		POWER							SIGNAL							POWER												
			P1	P2	P3	P4	P5	P6	P7	1	2	3	4	5	6	7	P8	P9	P10	P11	P12	P13	P14						
6600132-5	D C B A								J	J	J	J	J	J	J														
									K	K	K	F	K	K	K														
									N	N	N	G	N	N	N														
									S	S	S	S	S	S	S														
7P + 28S + 7P																													

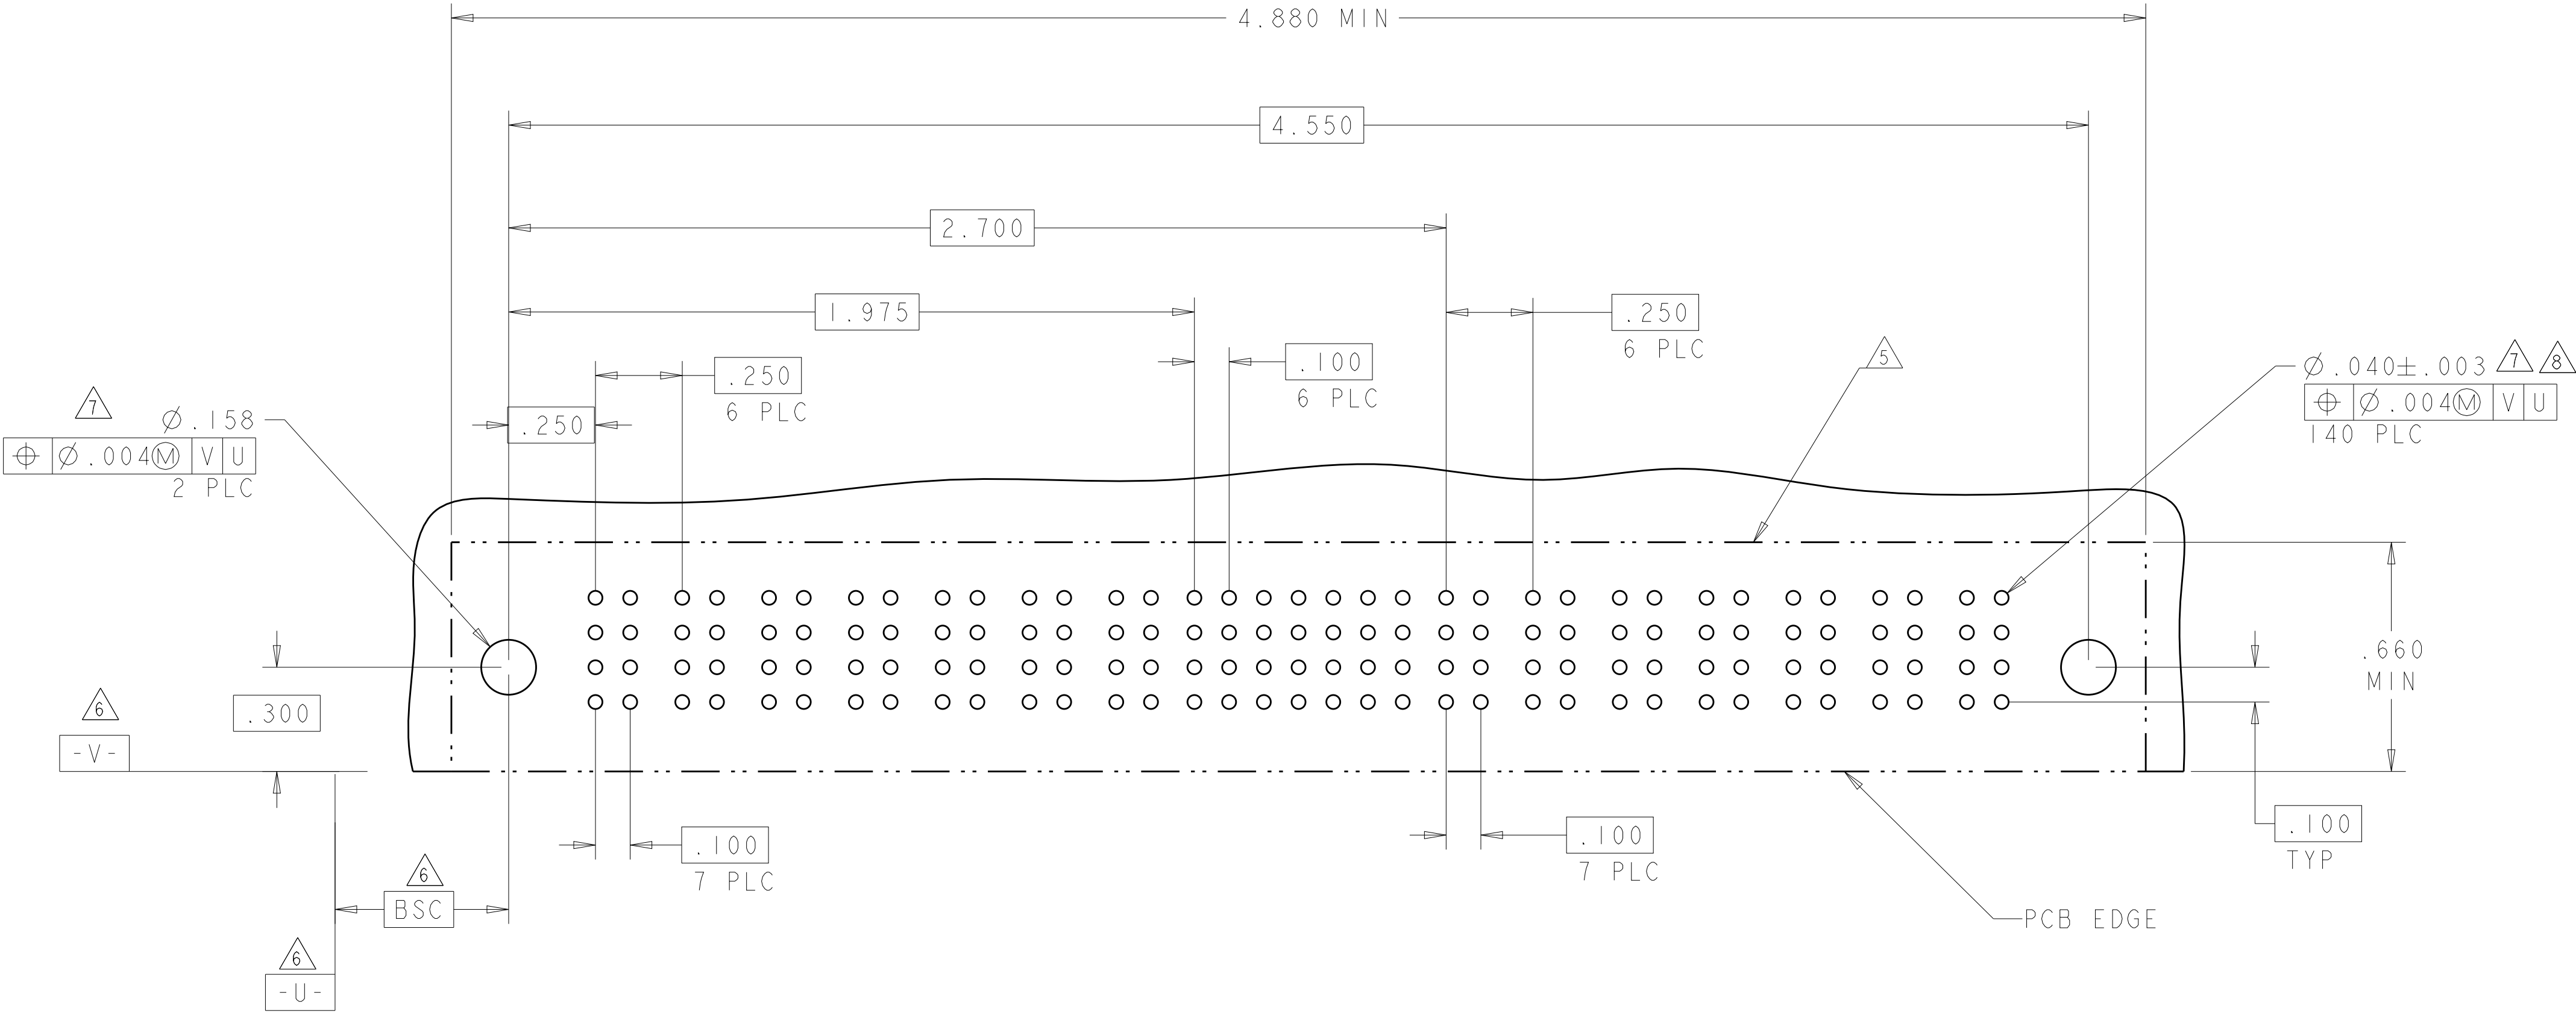




PART NUMBER	ROWS		POWER							SIGNAL		POWER								
			P1	P2	P3	P4	P5	P6	P7	1	2	P8	P9	P10	P11	P12	P13	P14		
6600132-7	D C B A		PS		PS		PS		PS	J	J	PS	PS	PS	PS	PS	PS			
										K	K									
										N	N									
										H	S									
7P + 8S + 7P																				

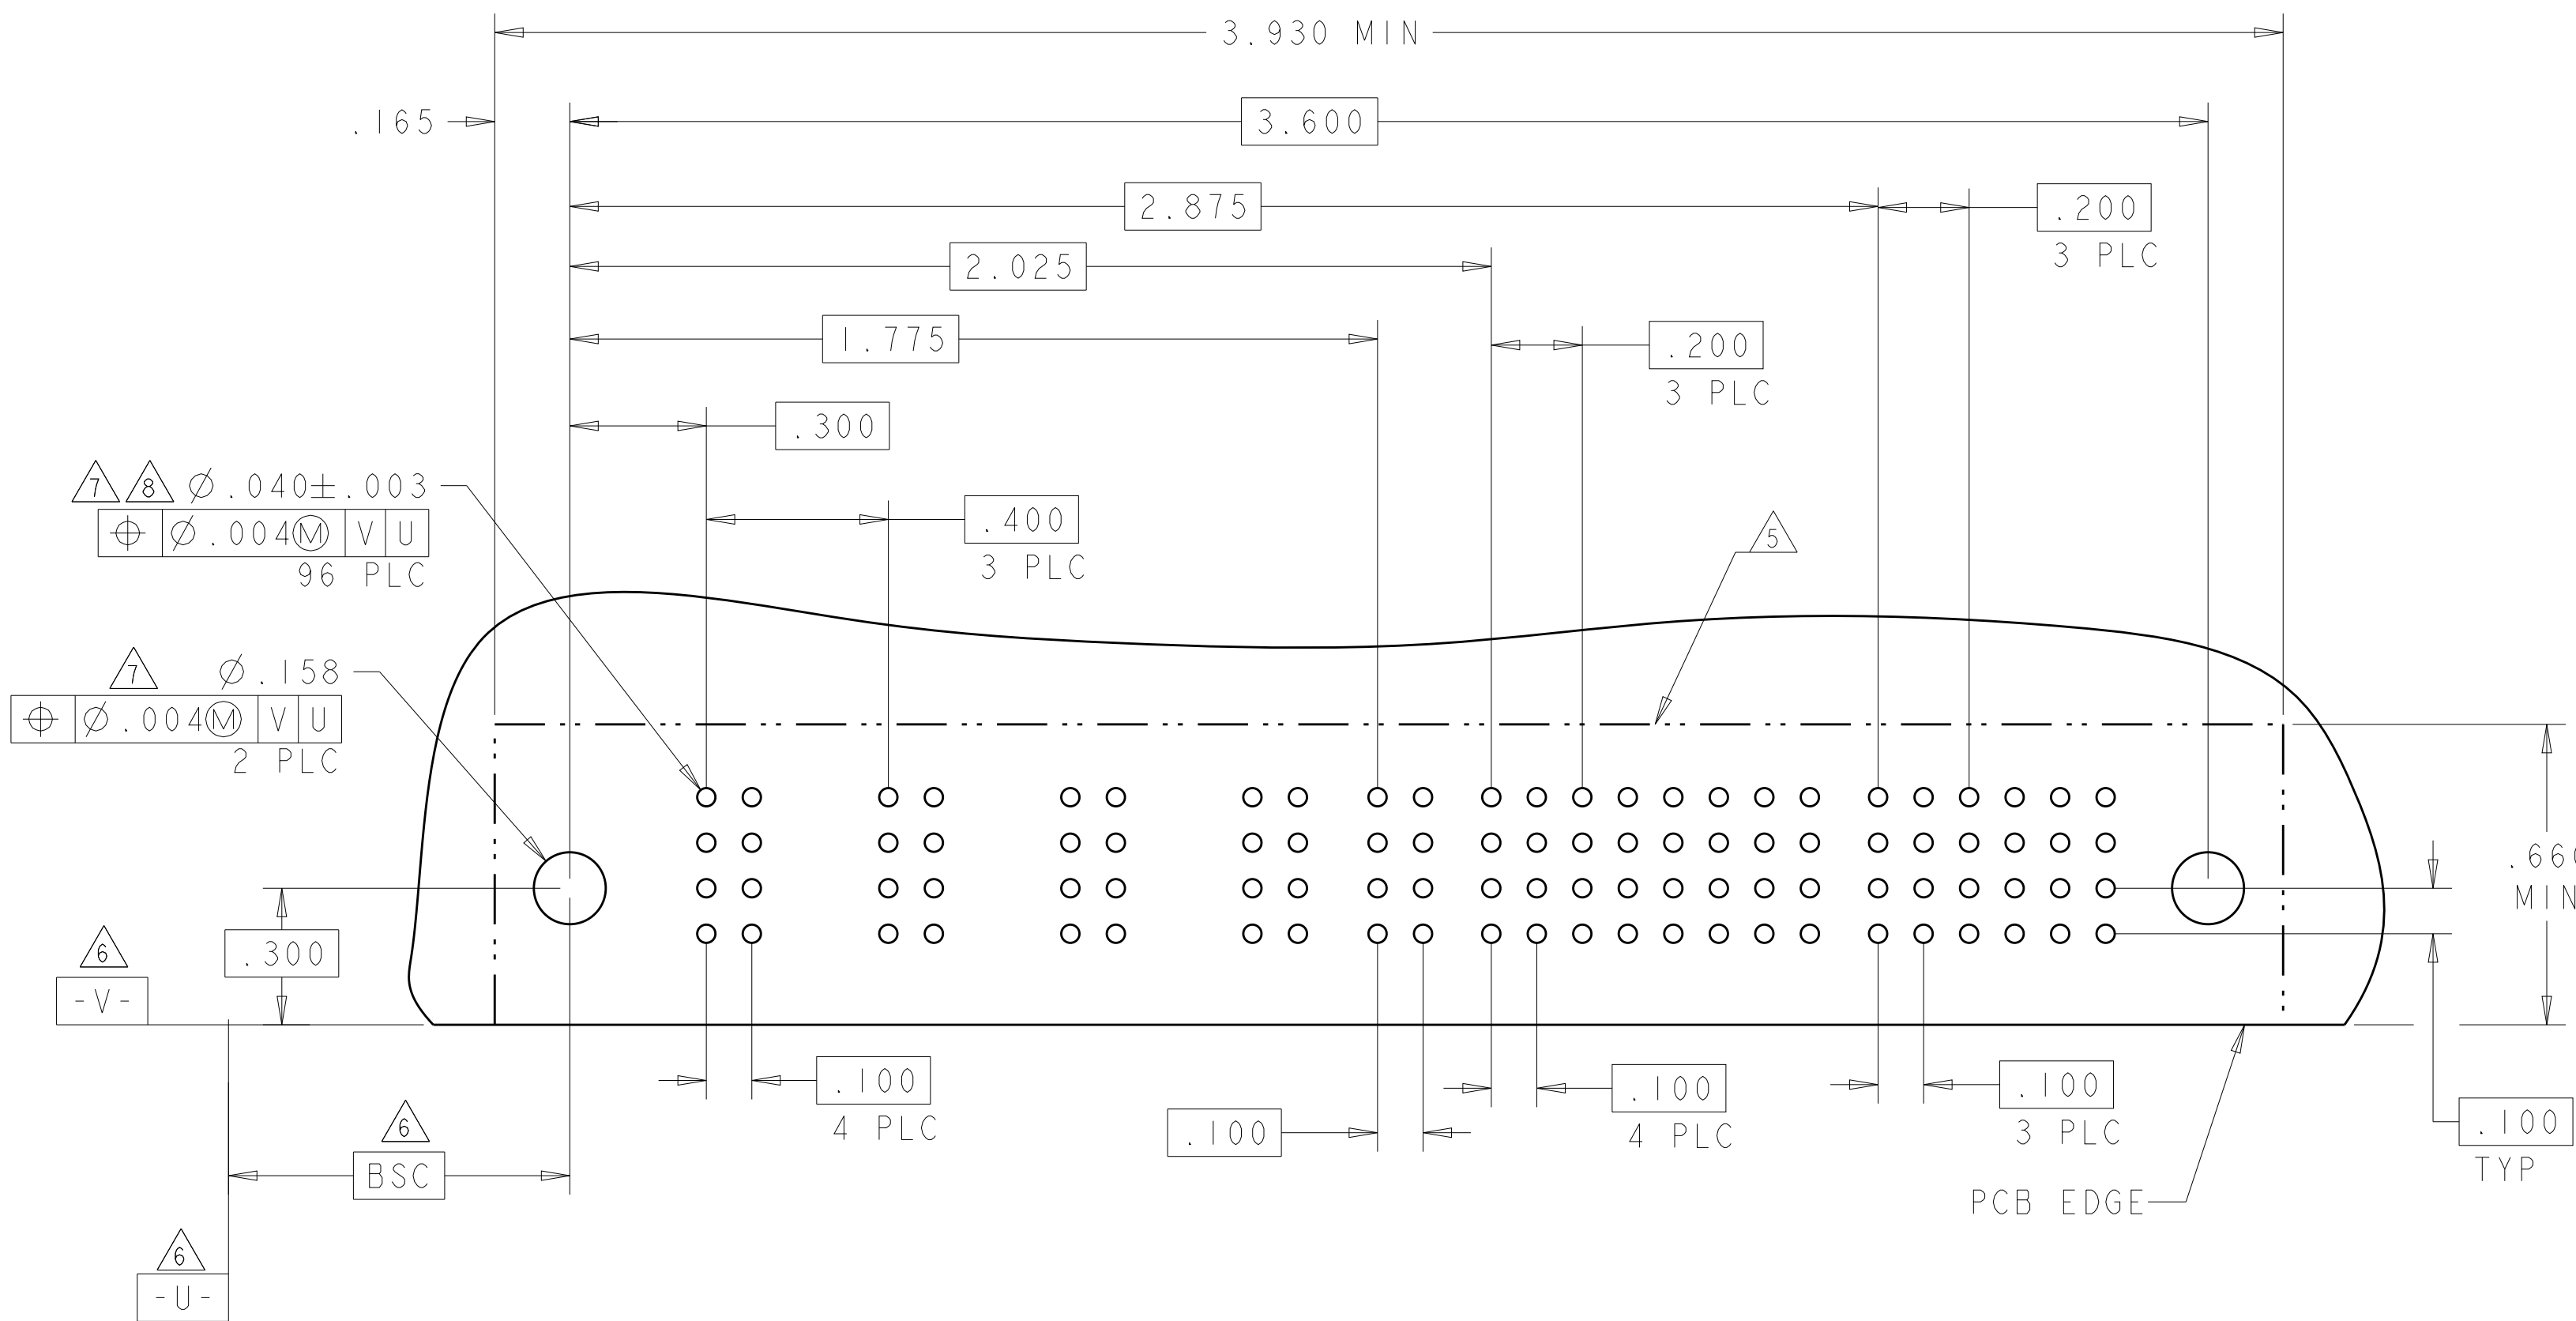4805 (3/13)

NO CONTACT LOADED

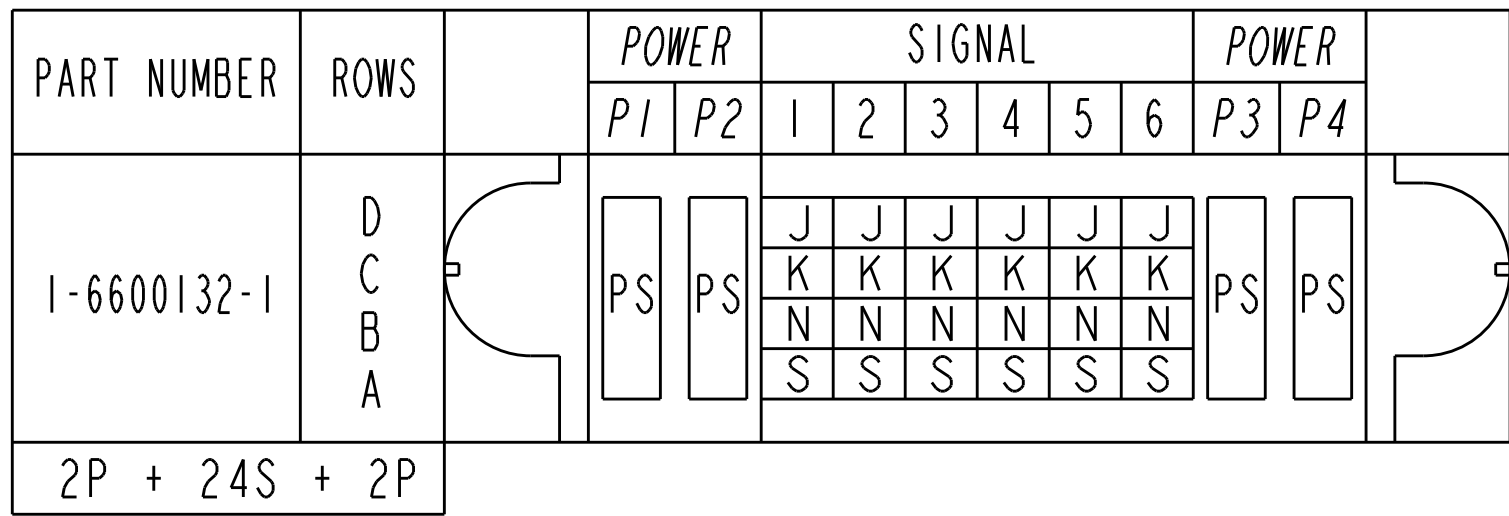

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN CHV GRZYBOWSKI 13JUN05		 TE Connectivity	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ±.2°		NAME RIGHT ANGLE HEADER W/GUIDES ASSEMBLY MULTI-BEAM XL (DUAL-BEAM POWER)	
		APVD M. PERCHERRE PRODUCT SPEC 108-1973 APPLICATION SPEC 114-13038		SIZE A1	
MATERIAL -		FINISH -		CASE CODE G=6600132	
WEIGHT -		CUSTOMER DRAWING		SCALE 4:1 SHEET 6 OF 7 REV E7	

PART NUMBER	ROWS	POWER		SIGNAL				POWER
		P1	1	2	3	4	P2	
I-6600132-0	D		J	J	J	J		
	C		K	K	F	K		
	B		N	N	G	N		
	A		S	S	S	S		
IP + 16S + IP								

