

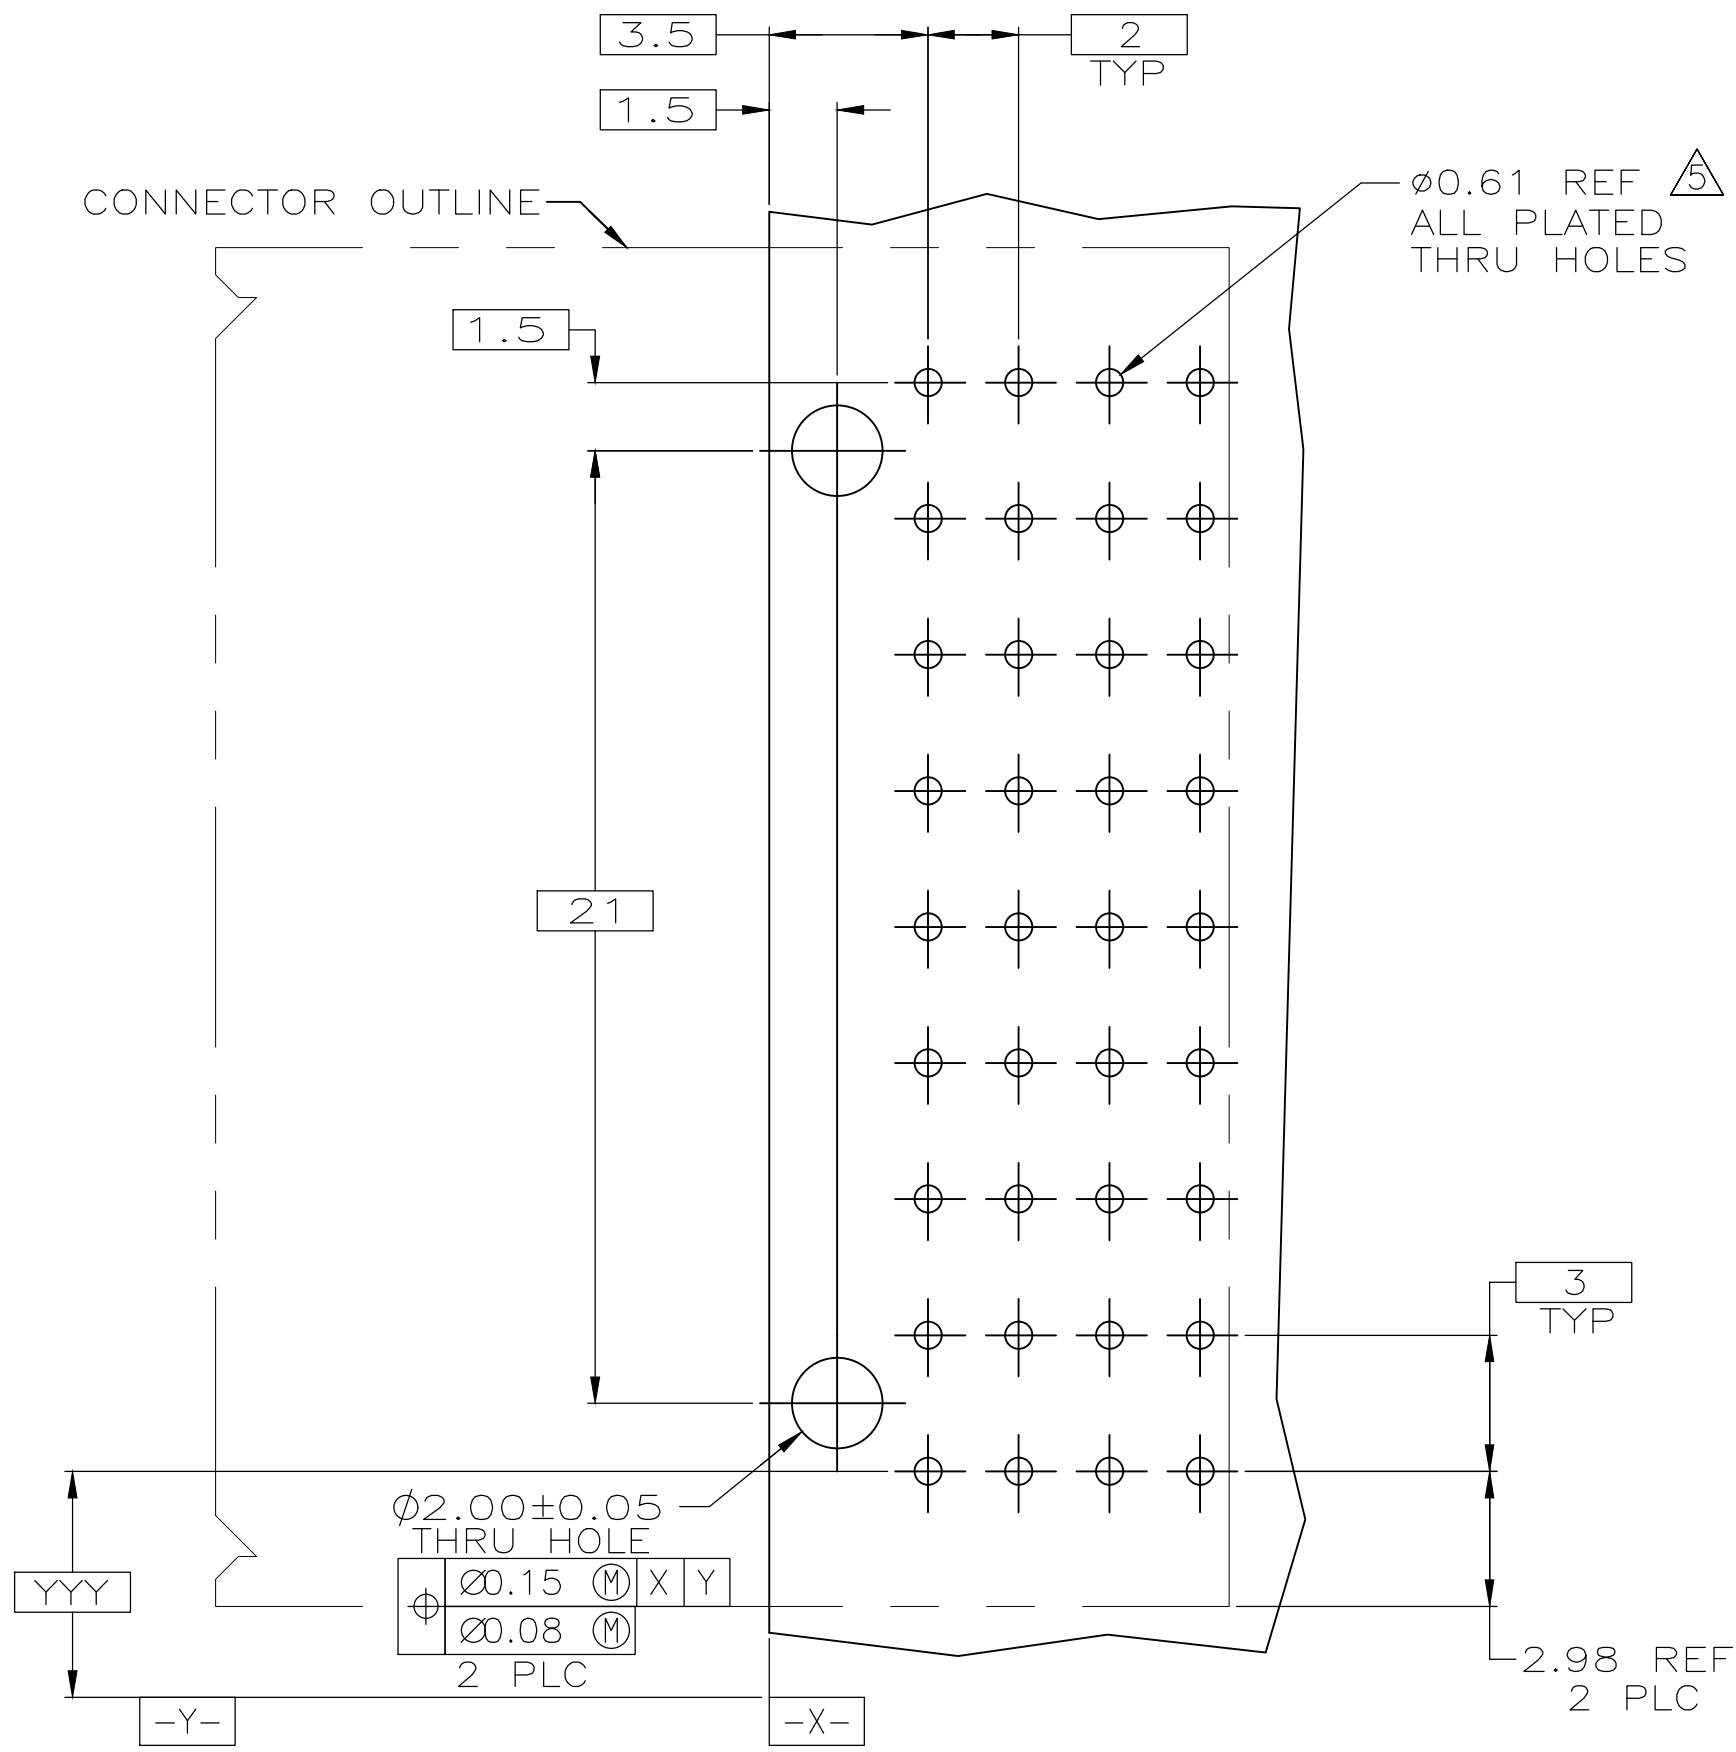
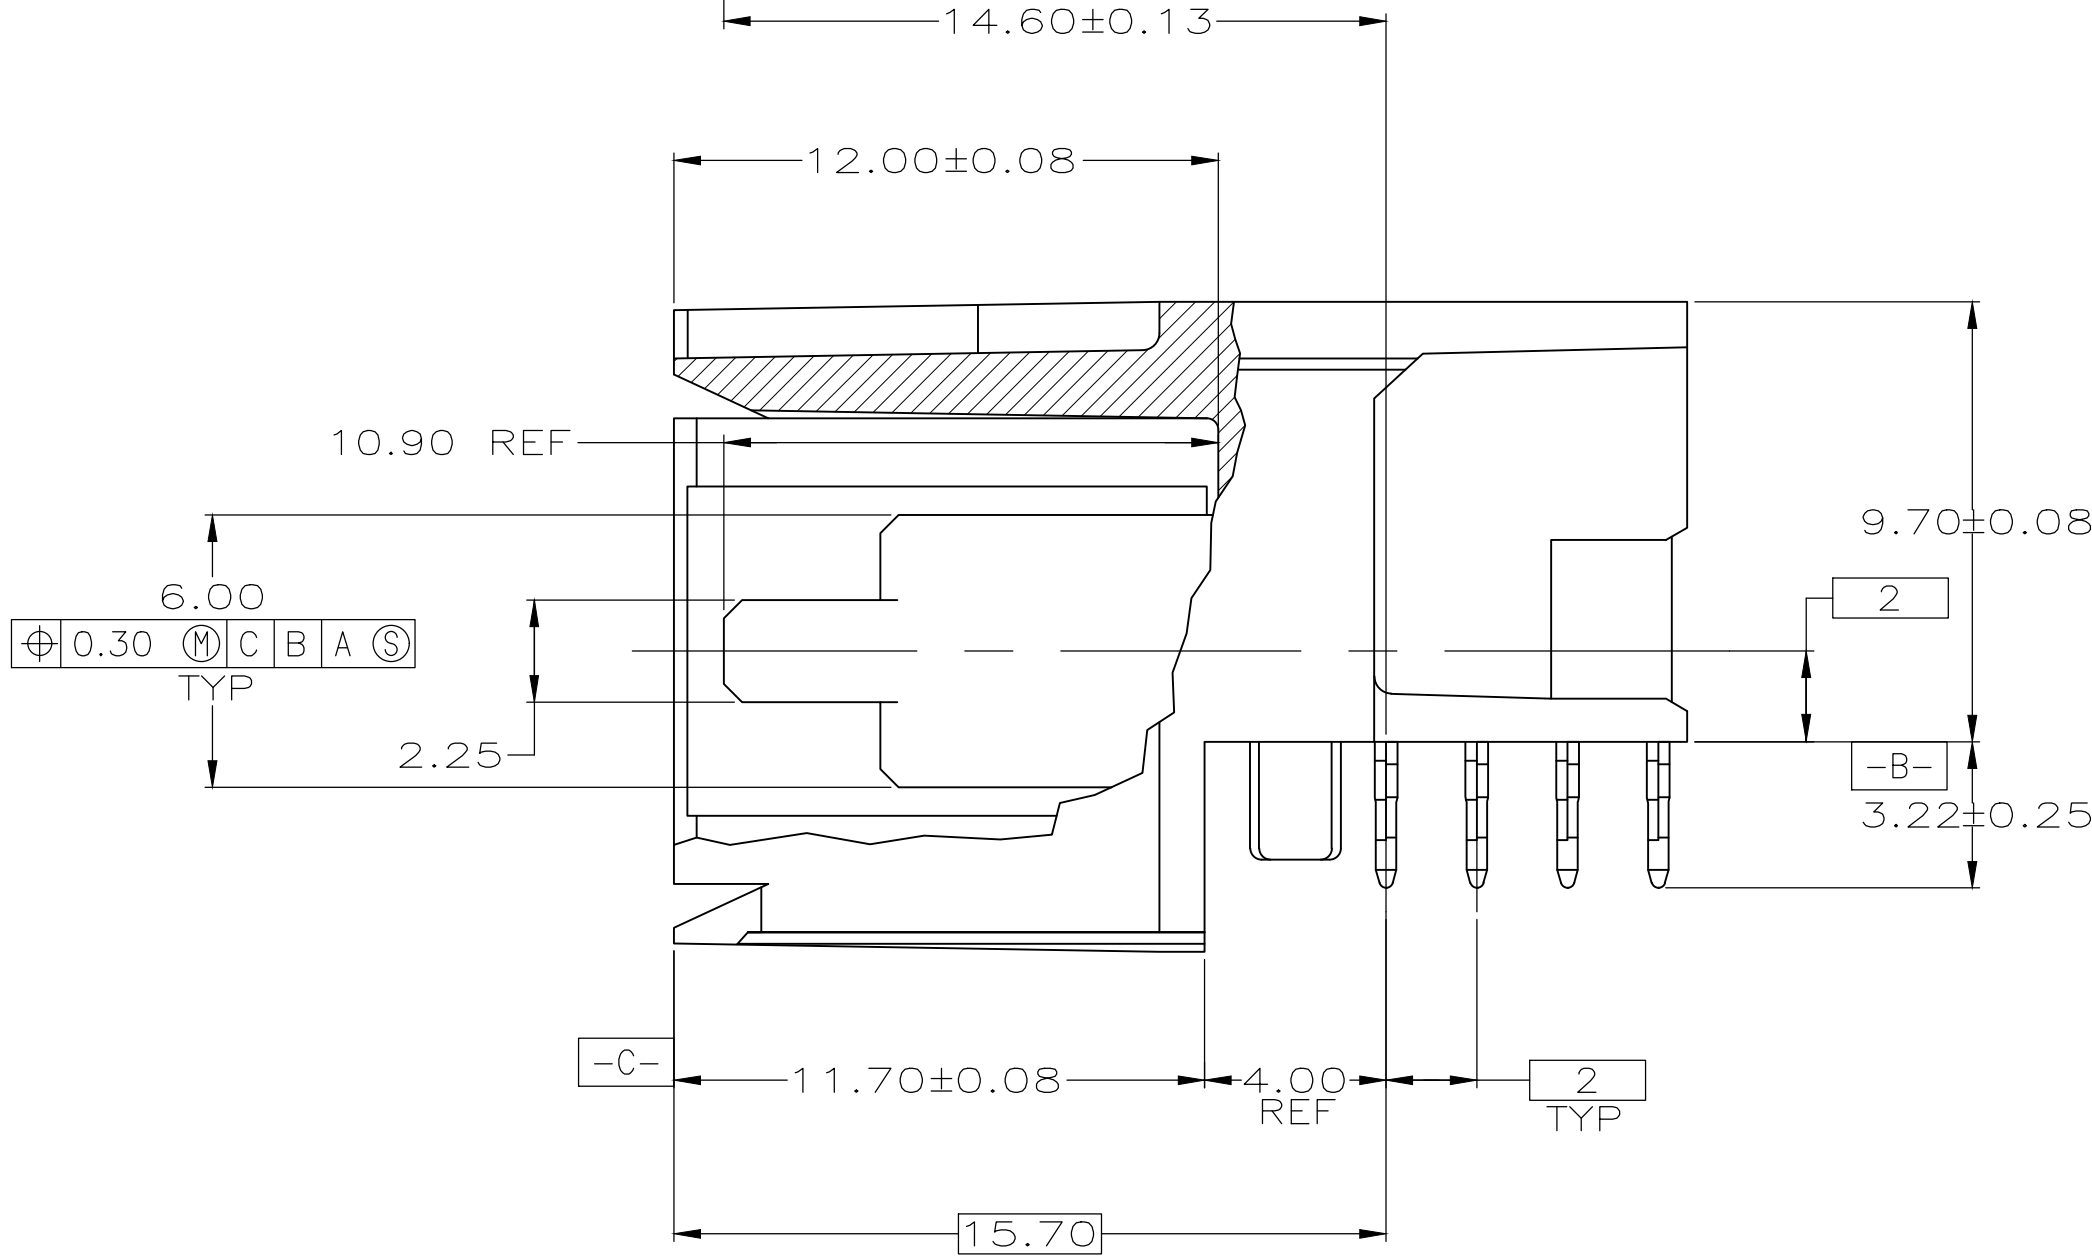



LOC	DIST	REVISIONS			
		REV	PER	DESCRIPTION	DATE
AD	00	B1	REV PER	ECO-20-004668	10JUN2020

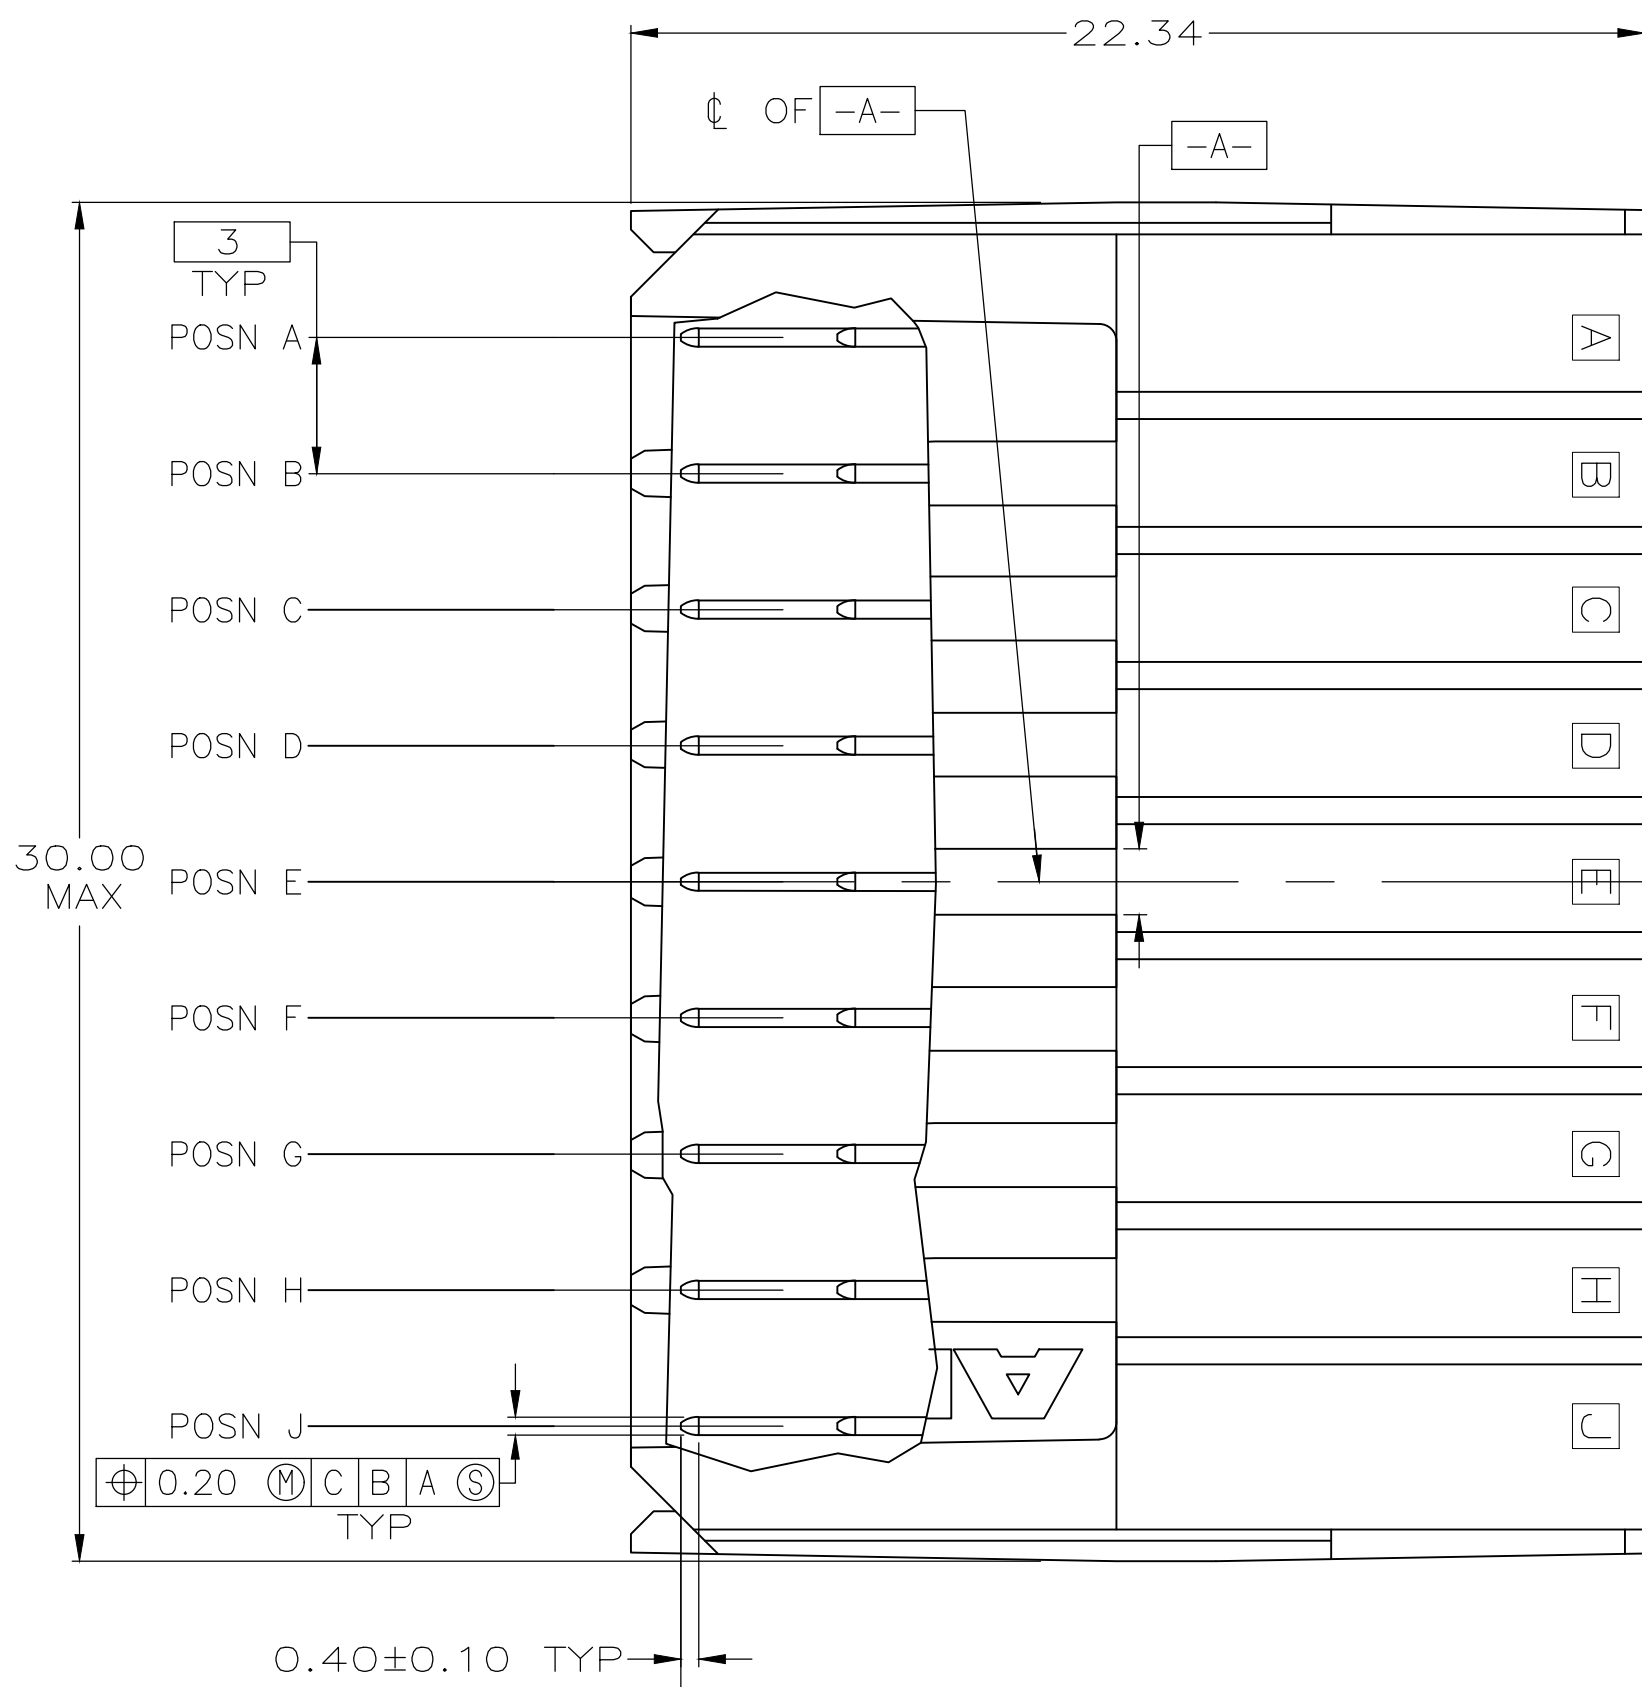


RECOMMENDED PCB HOLE LAYOUT

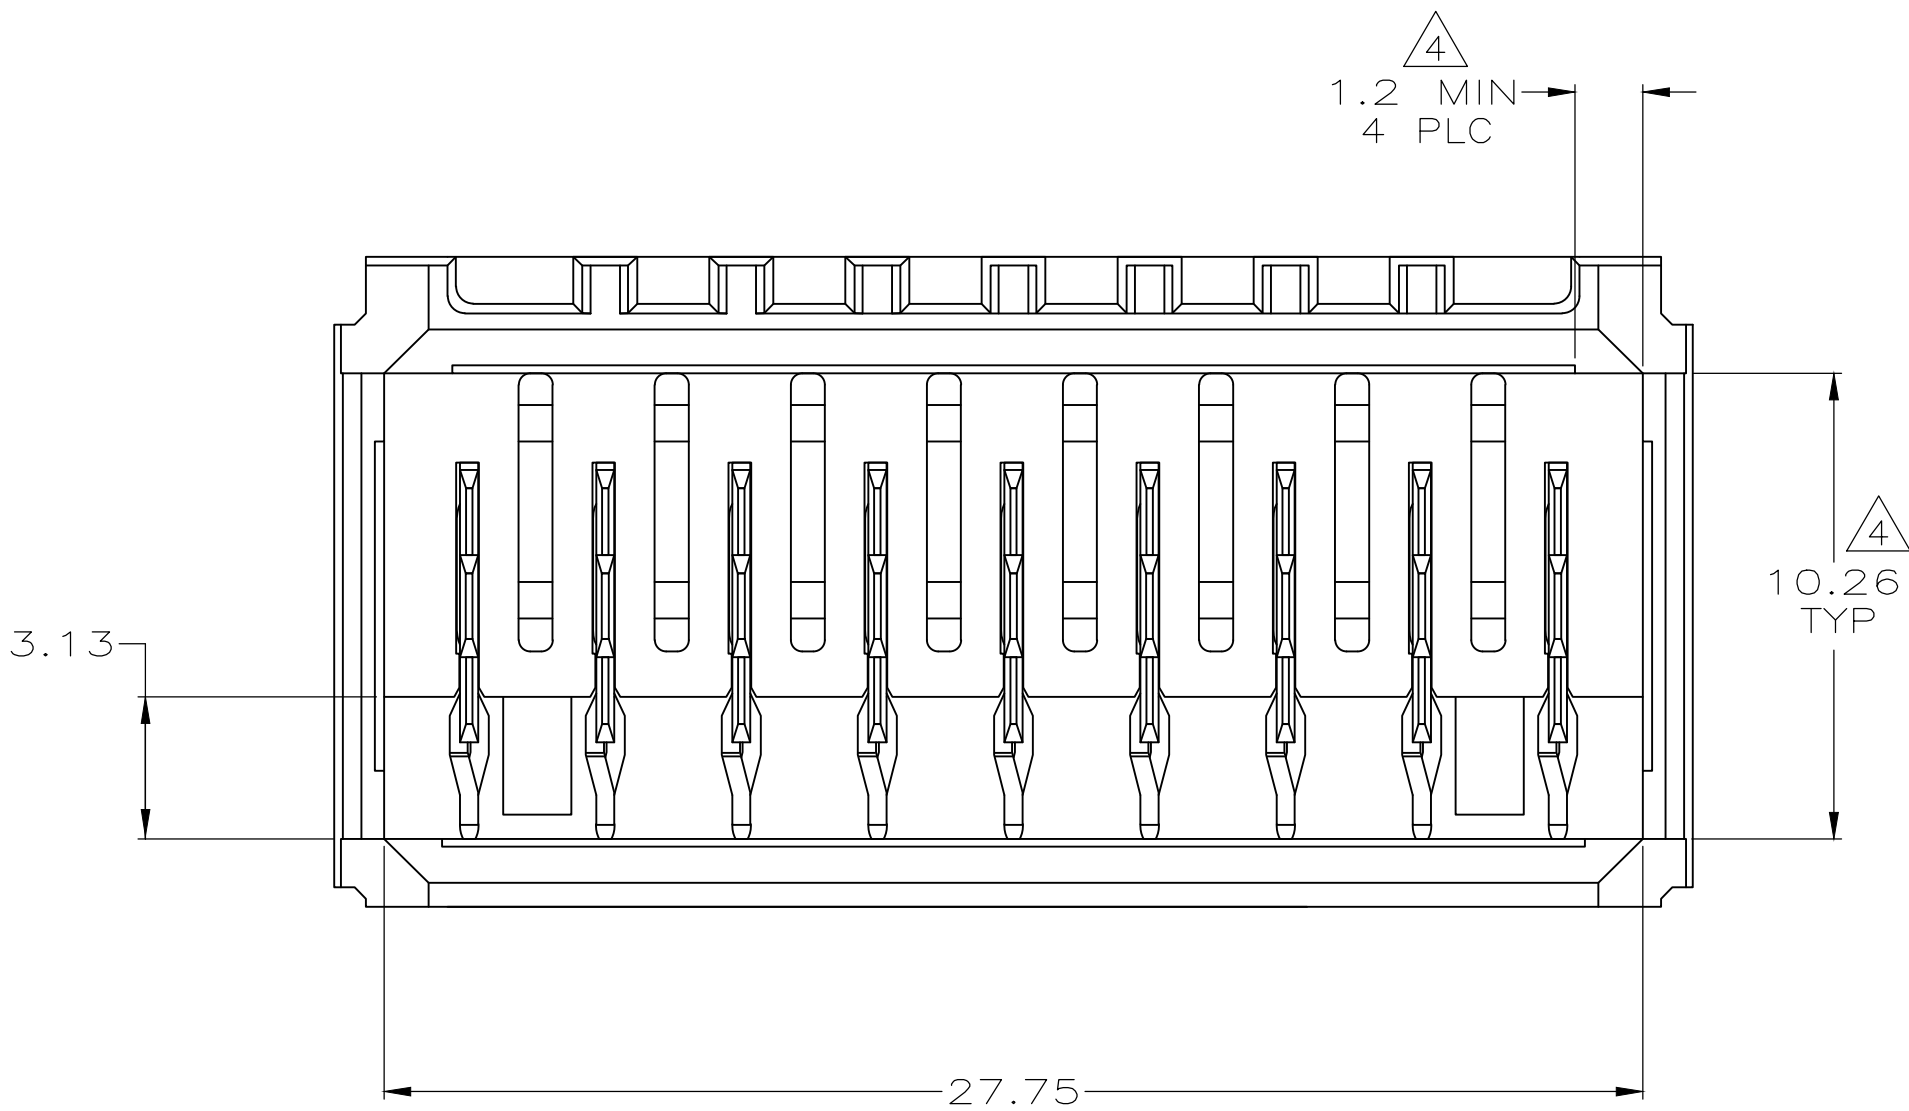

- 1 MATERIAL: HOUSING: POLYESTER. COLOR: GRAY. UL 94V-O. CONTACT: COPPER ALLOY.
- 2 FINISH: IN ACCORDANCE WITH PRODUCT SPECIFICATION 108-1651, GOLD PLATING OR EQUIVALENT PLATING ON PRODUCT CONTACT MATING AREA, AND MATTE TIN PLATING ON COMPLIANT PIN AREA, ALL OVER MATTE NICKEL UNDERPLATED. DETAIL PLEASE REFER TO PRODUCT SPECIFICATION 108-1651.
- 3 FINISH: CONTACT LUBRICATION WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995.
- 4 THE 10.26±0.13 DIMENSION APPLIES IN THIS AREA.
- 5 REFERENCE APPLICATION SPEC 114-1103 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESS.
6. CURRENT RATING 10A/CONTACT PER PRODUCT SPEC 108-1651.

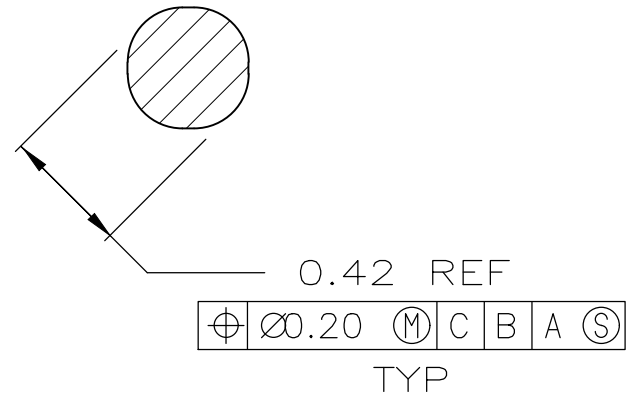

SECTION W-W
SCALE 40:1

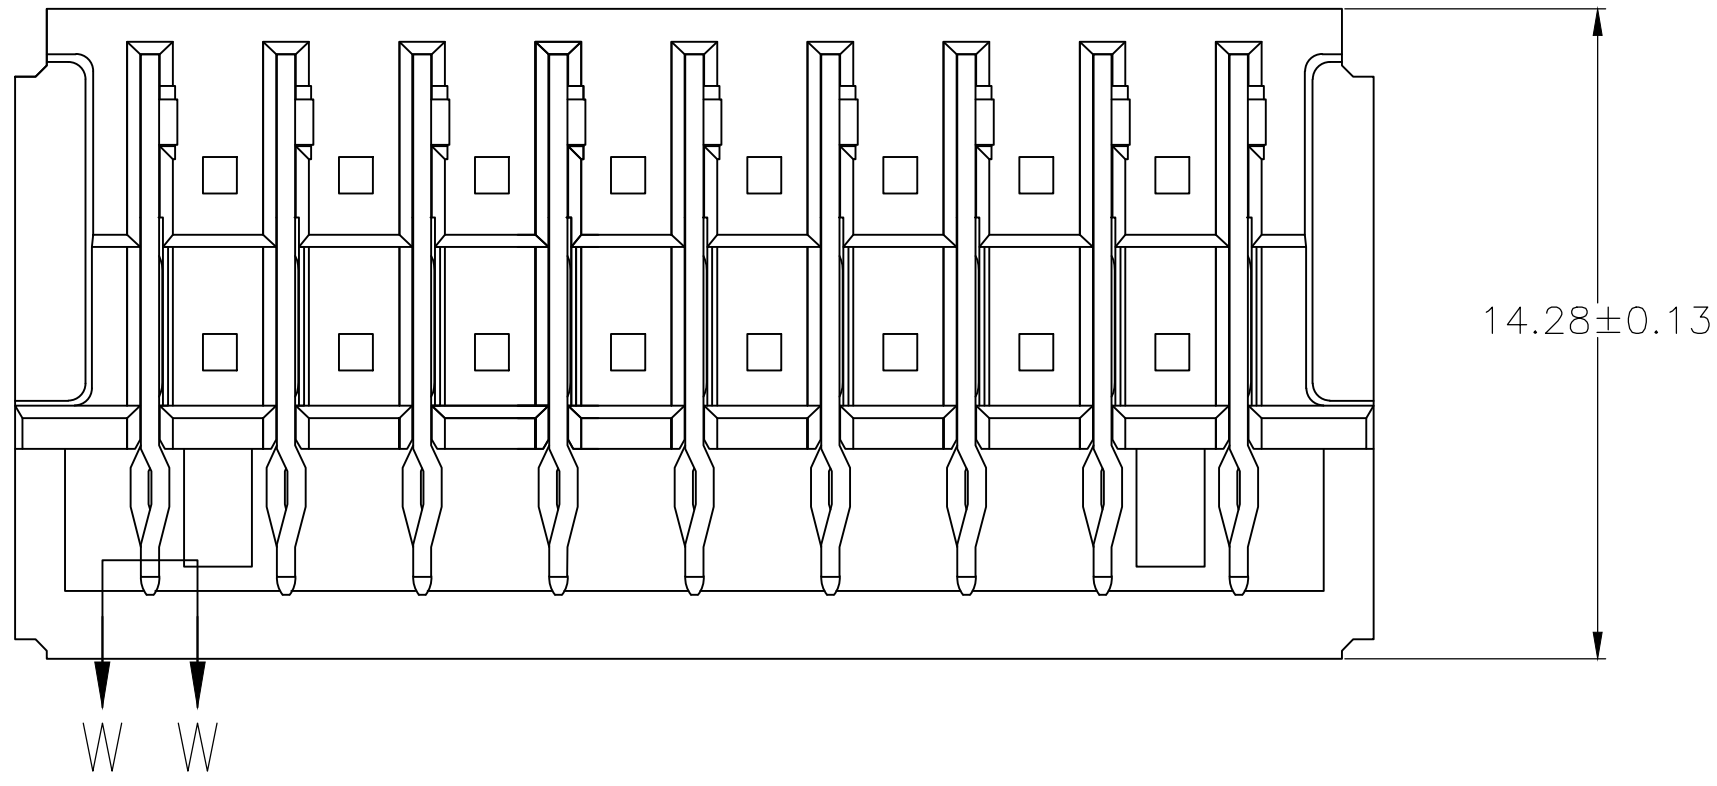

5646959-1
PART
NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. CARBO	15DEC04	Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
DIMENSIONS: mm		CHK R. PATTERSON	15DEC04	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APP'D R. PATTERSON	15DEC04	PRODUCT SPEC	
0 PLC ± -		108-1651		APPLICATION SPEC	
1 PLC ± 0.13		114-1103		RESTRICTED TO	
2 PLC ± -		A1 00779		CUSTOMER DRAWING	
3 PLC ± -		SCALE 6:1		SHEET 1 OF 1	
4 PLC ± -		REV B1			
ANGLES ± -					
FINISH					