

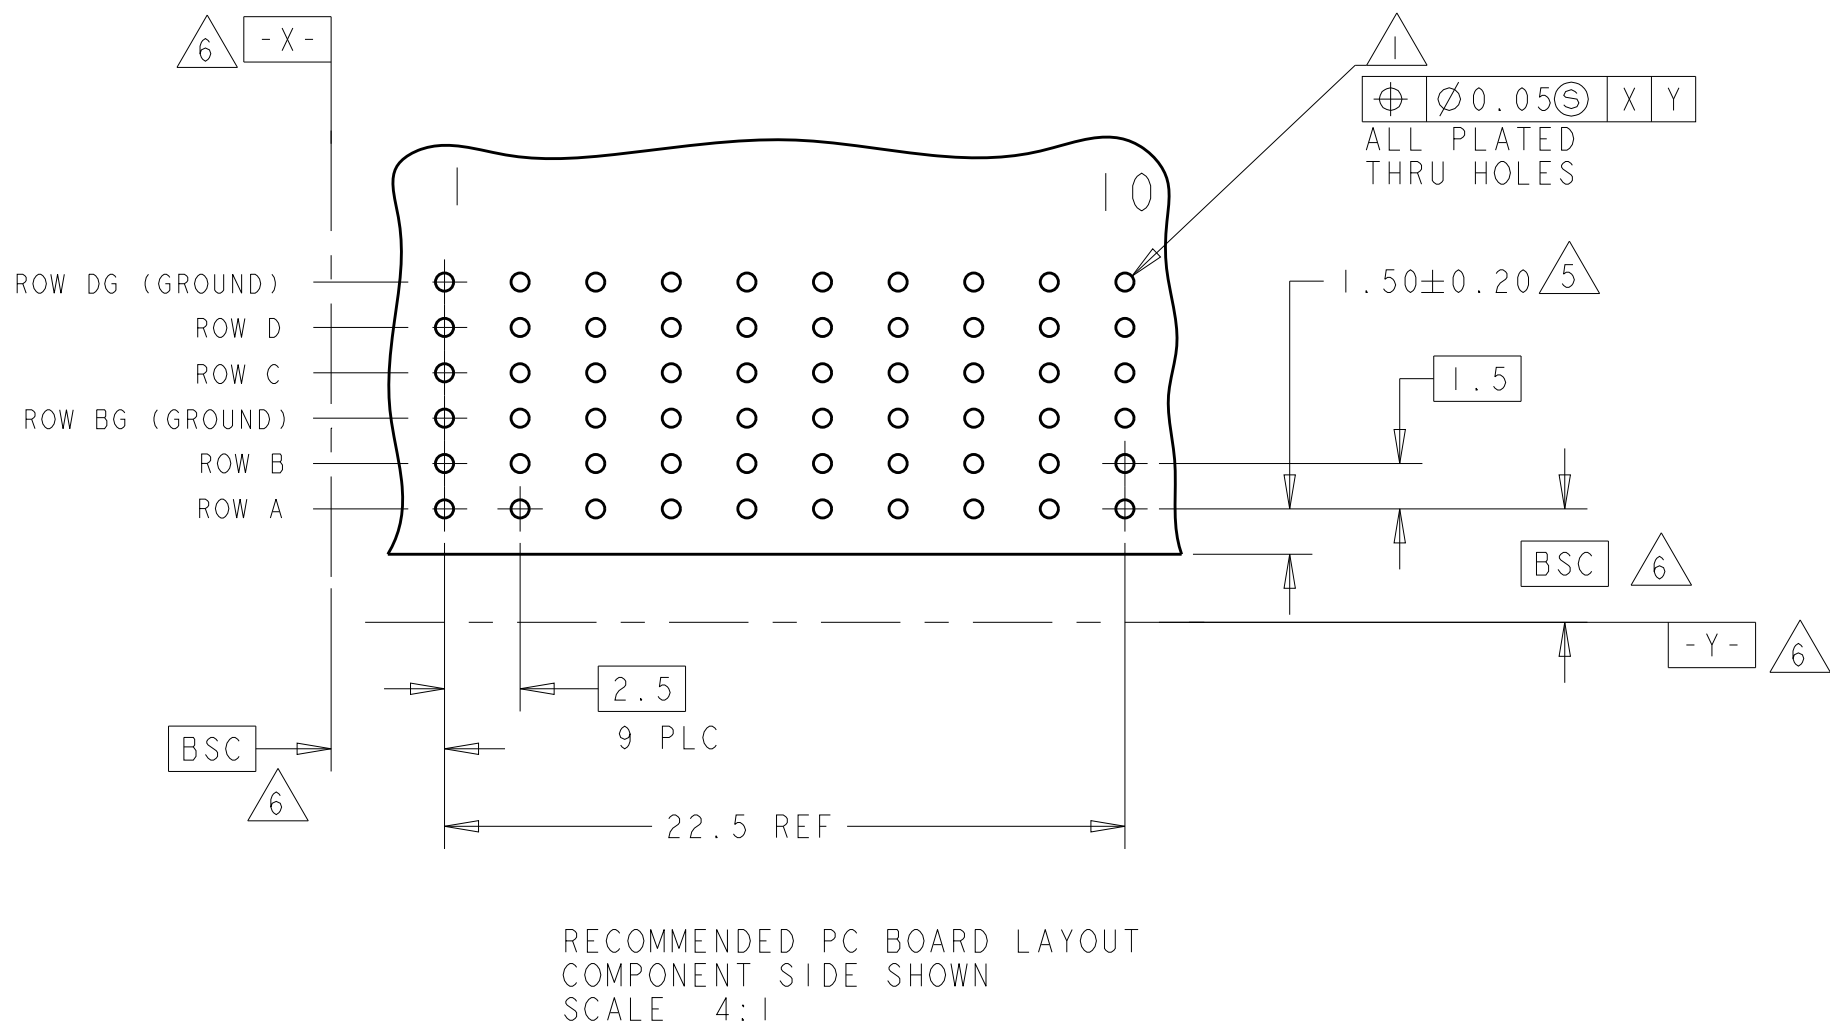



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	C	REVISED PER ECO-18-018129	14OCT2019	AP	DS

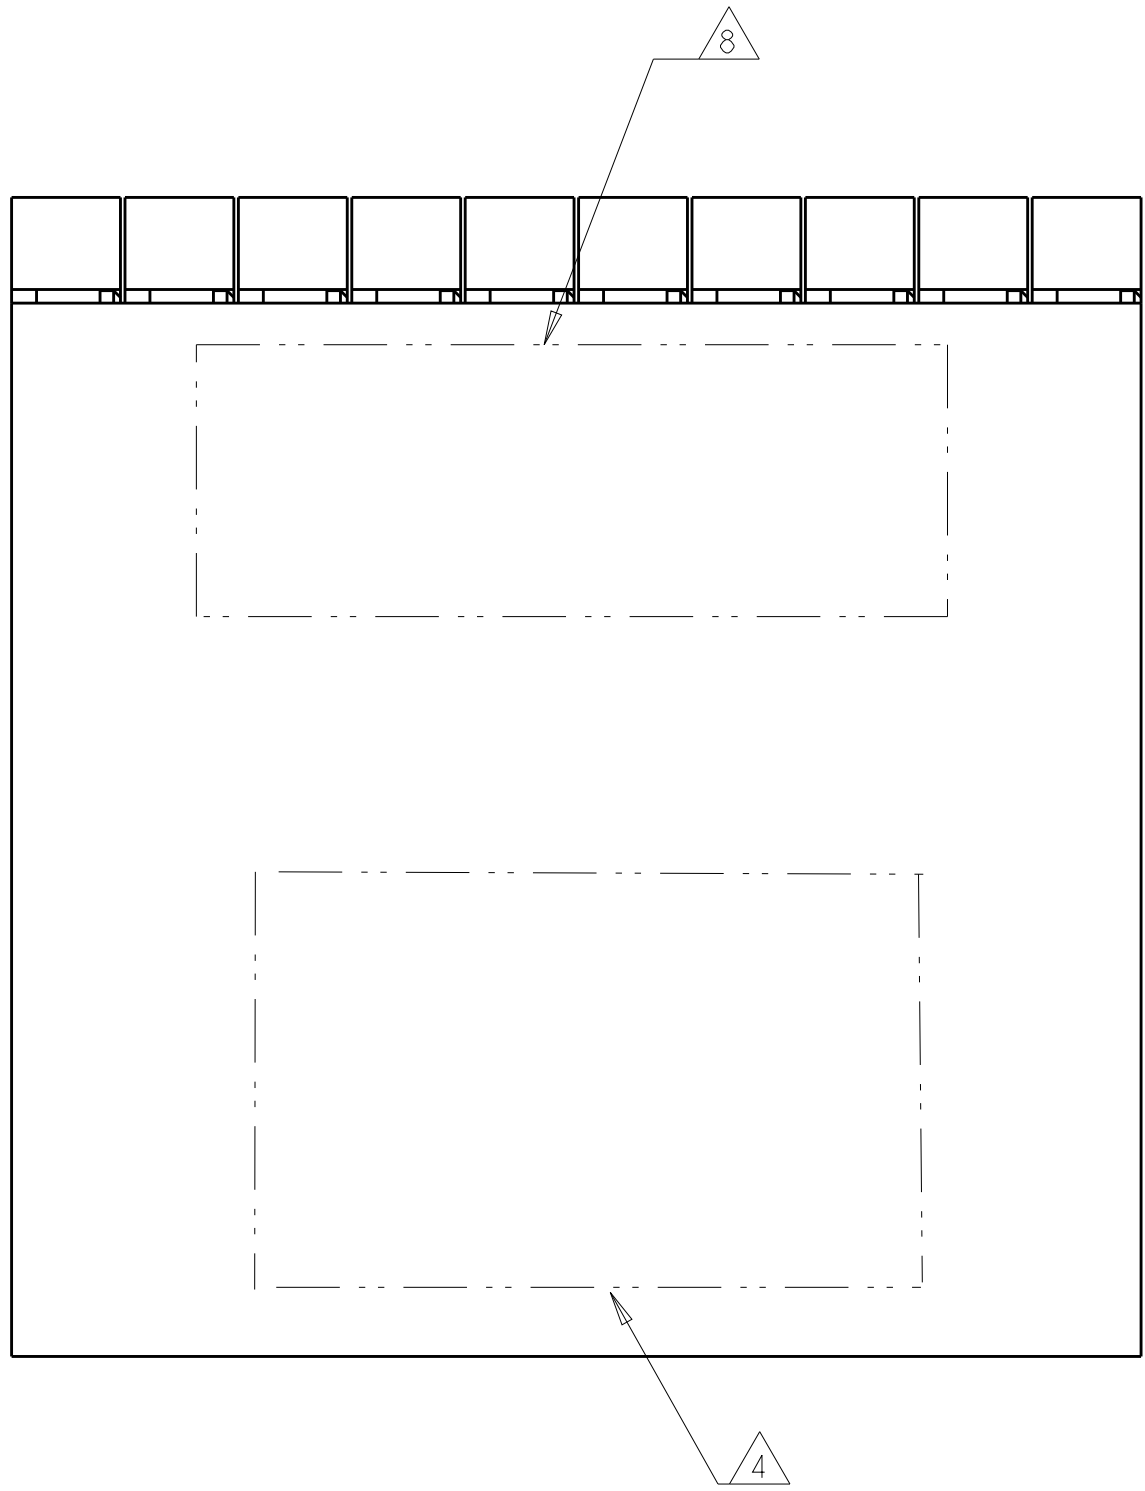

- REFERENCE APPLICATION SPEC 114-13059 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESSES.
- MATERIAL:
CONTACT & SHIELD - PHOSPHOR BRONZE
HOUSING & CHICKLET - GLASS FILLED POLYESTER
- FINISH: SIGNAL AND GROUND CONTACTS:
MATING AREA: MEETS THE PERFORMANCE REQUIREMENTS OF PRODUCT SPECIFICATION 108-2055; BASED ON TELCORDIA GR-1217-CORE, APPLICATIONS IN UNCONTROLLED ENVIRONMENTS
COMPLIANT PIN AREA: 0.5 µm MIN MATTE TIN OVER BASE PLATING
- CONNECTOR MARKED WITH PART NUMBER AND DATE CODE IN APPROXIMATE AREA SHOWN
- DIMENSION APPLIES TO CENTERLINE OF THRU HOLE
- DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995
- TE OR TE CONNECTIVITY LOGO IS LOCATED.

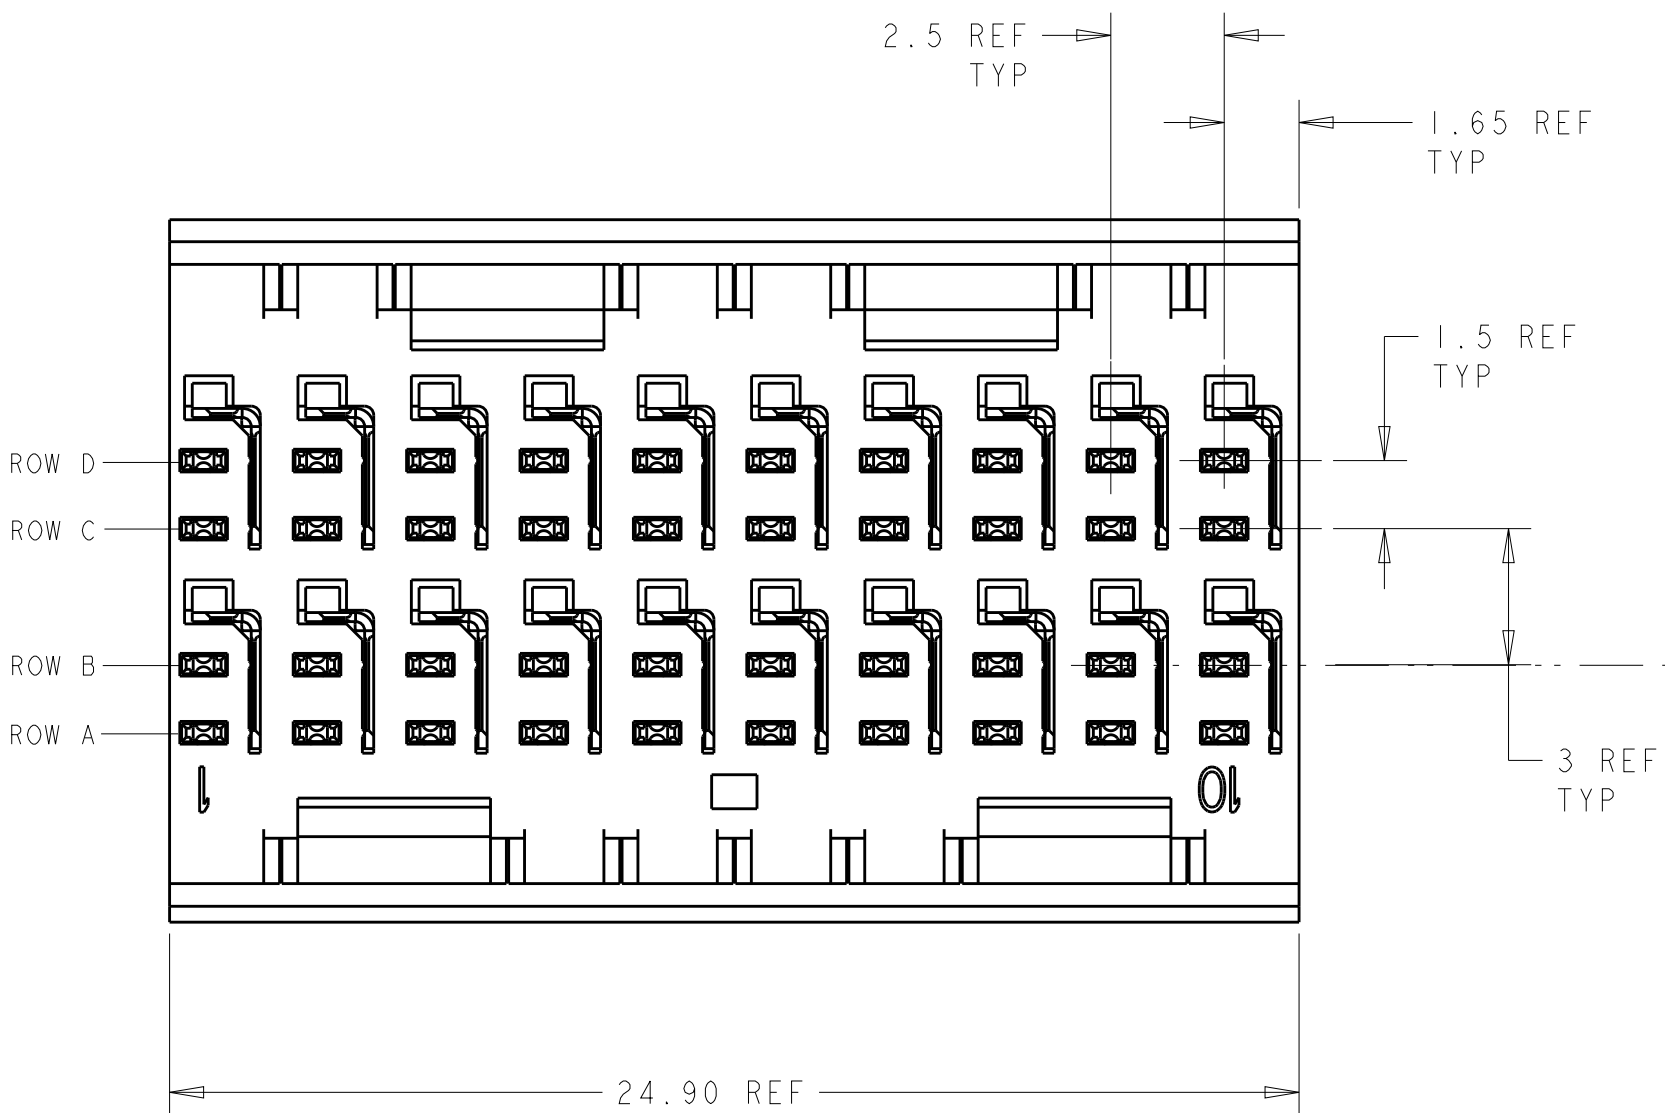

TOP SURFACE OF DAUGHTER CARD

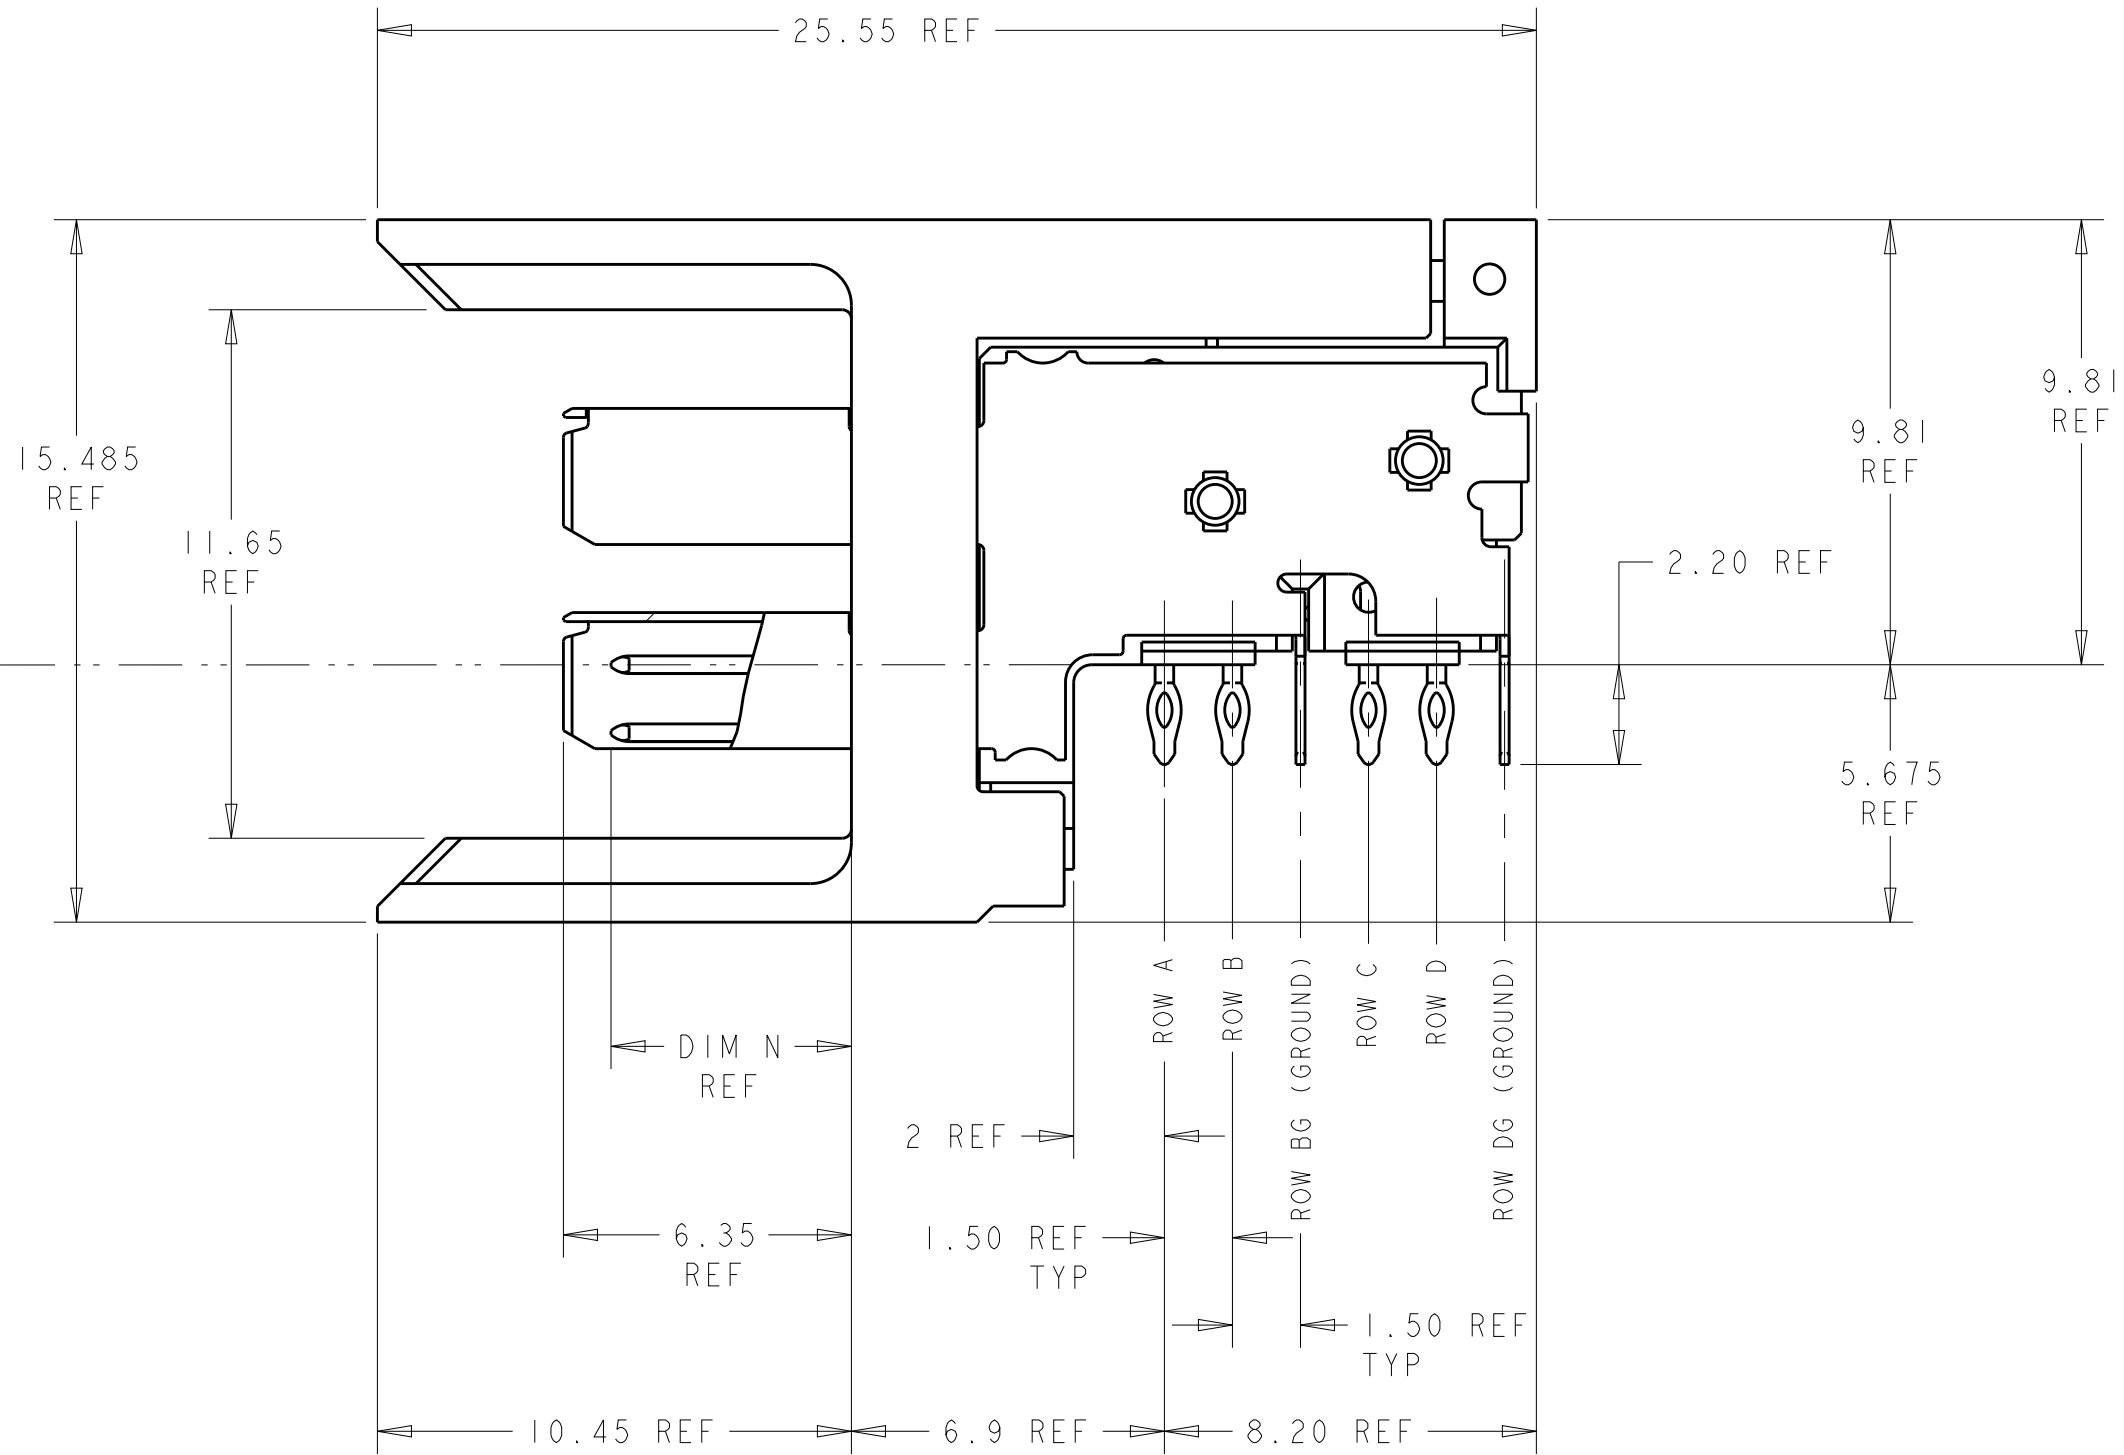

6469169-1
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. J. MAGARO 18JUL2004	TE Connectivity	
DIMENSIONS:		CHK R. A. PATTERSON 18JUL2004		
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD R. PATTERSON 31MAR2006	NAME HEADER ASSEMBLY, RIGHT ANGLE, 2 PAIR, COPLANAR, HMZd	
	0 PLC ±0.2	PRODUCT SPEC	SIZE A100779C=6469169	
	1 PLC ±0.13	APPLICATION SPEC		
	2 PLC ±0.05	WEIGHT	CUSTOMER DRAWING	
	3 PLC ±0.05	SCALE		
	4 PLC ±0.05	SHEET	6:1	
	ANGLES ±1°	OF		
	FINISH	REV	C	
	MATERIAL			