

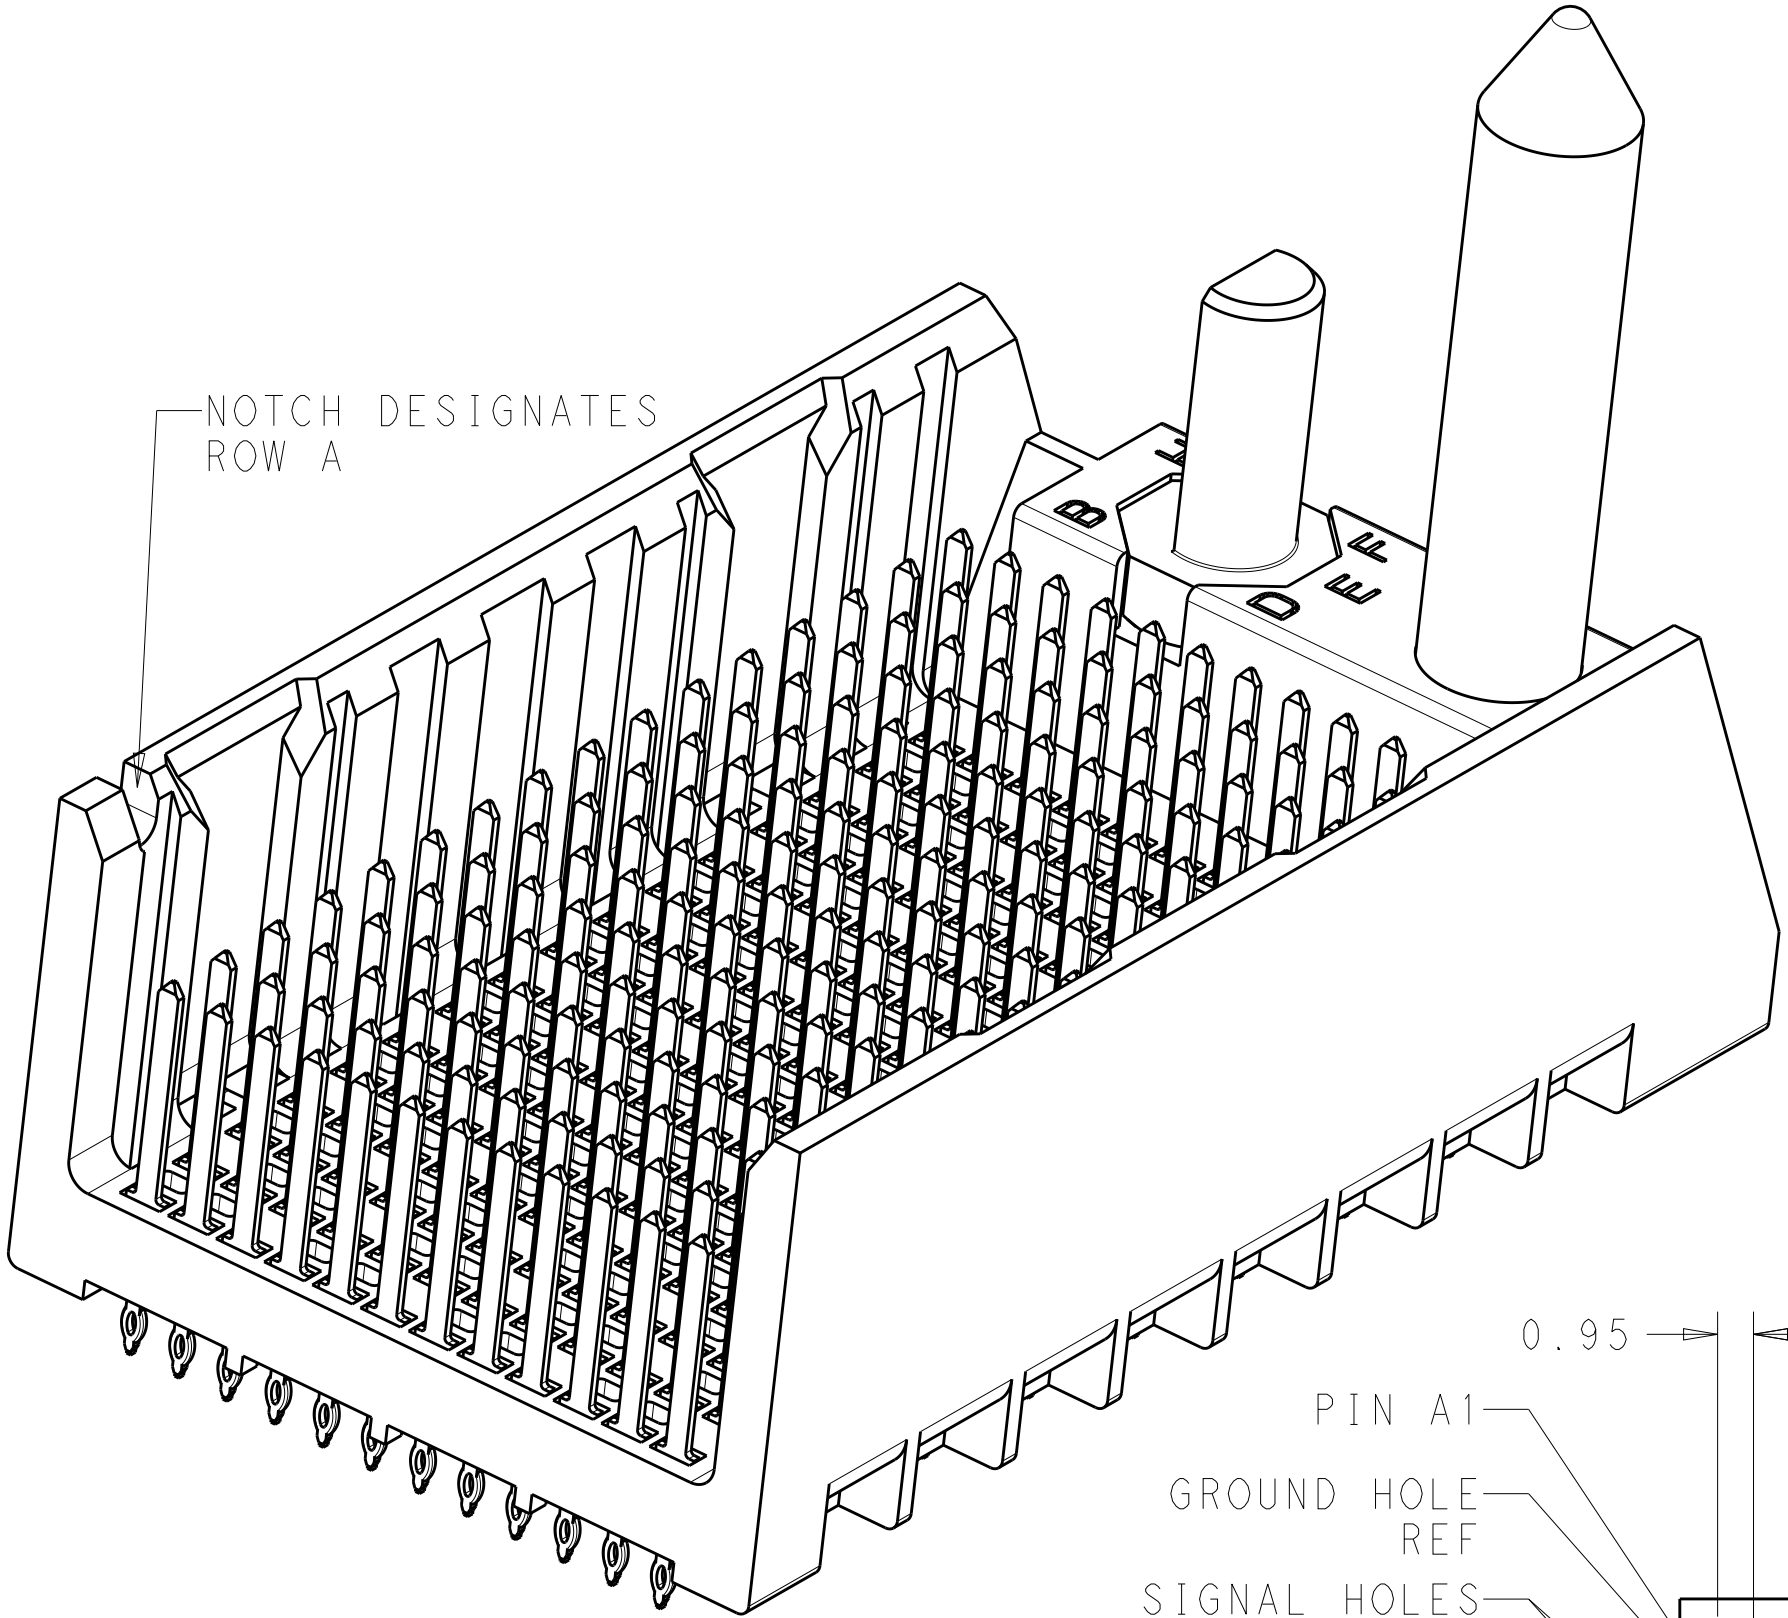
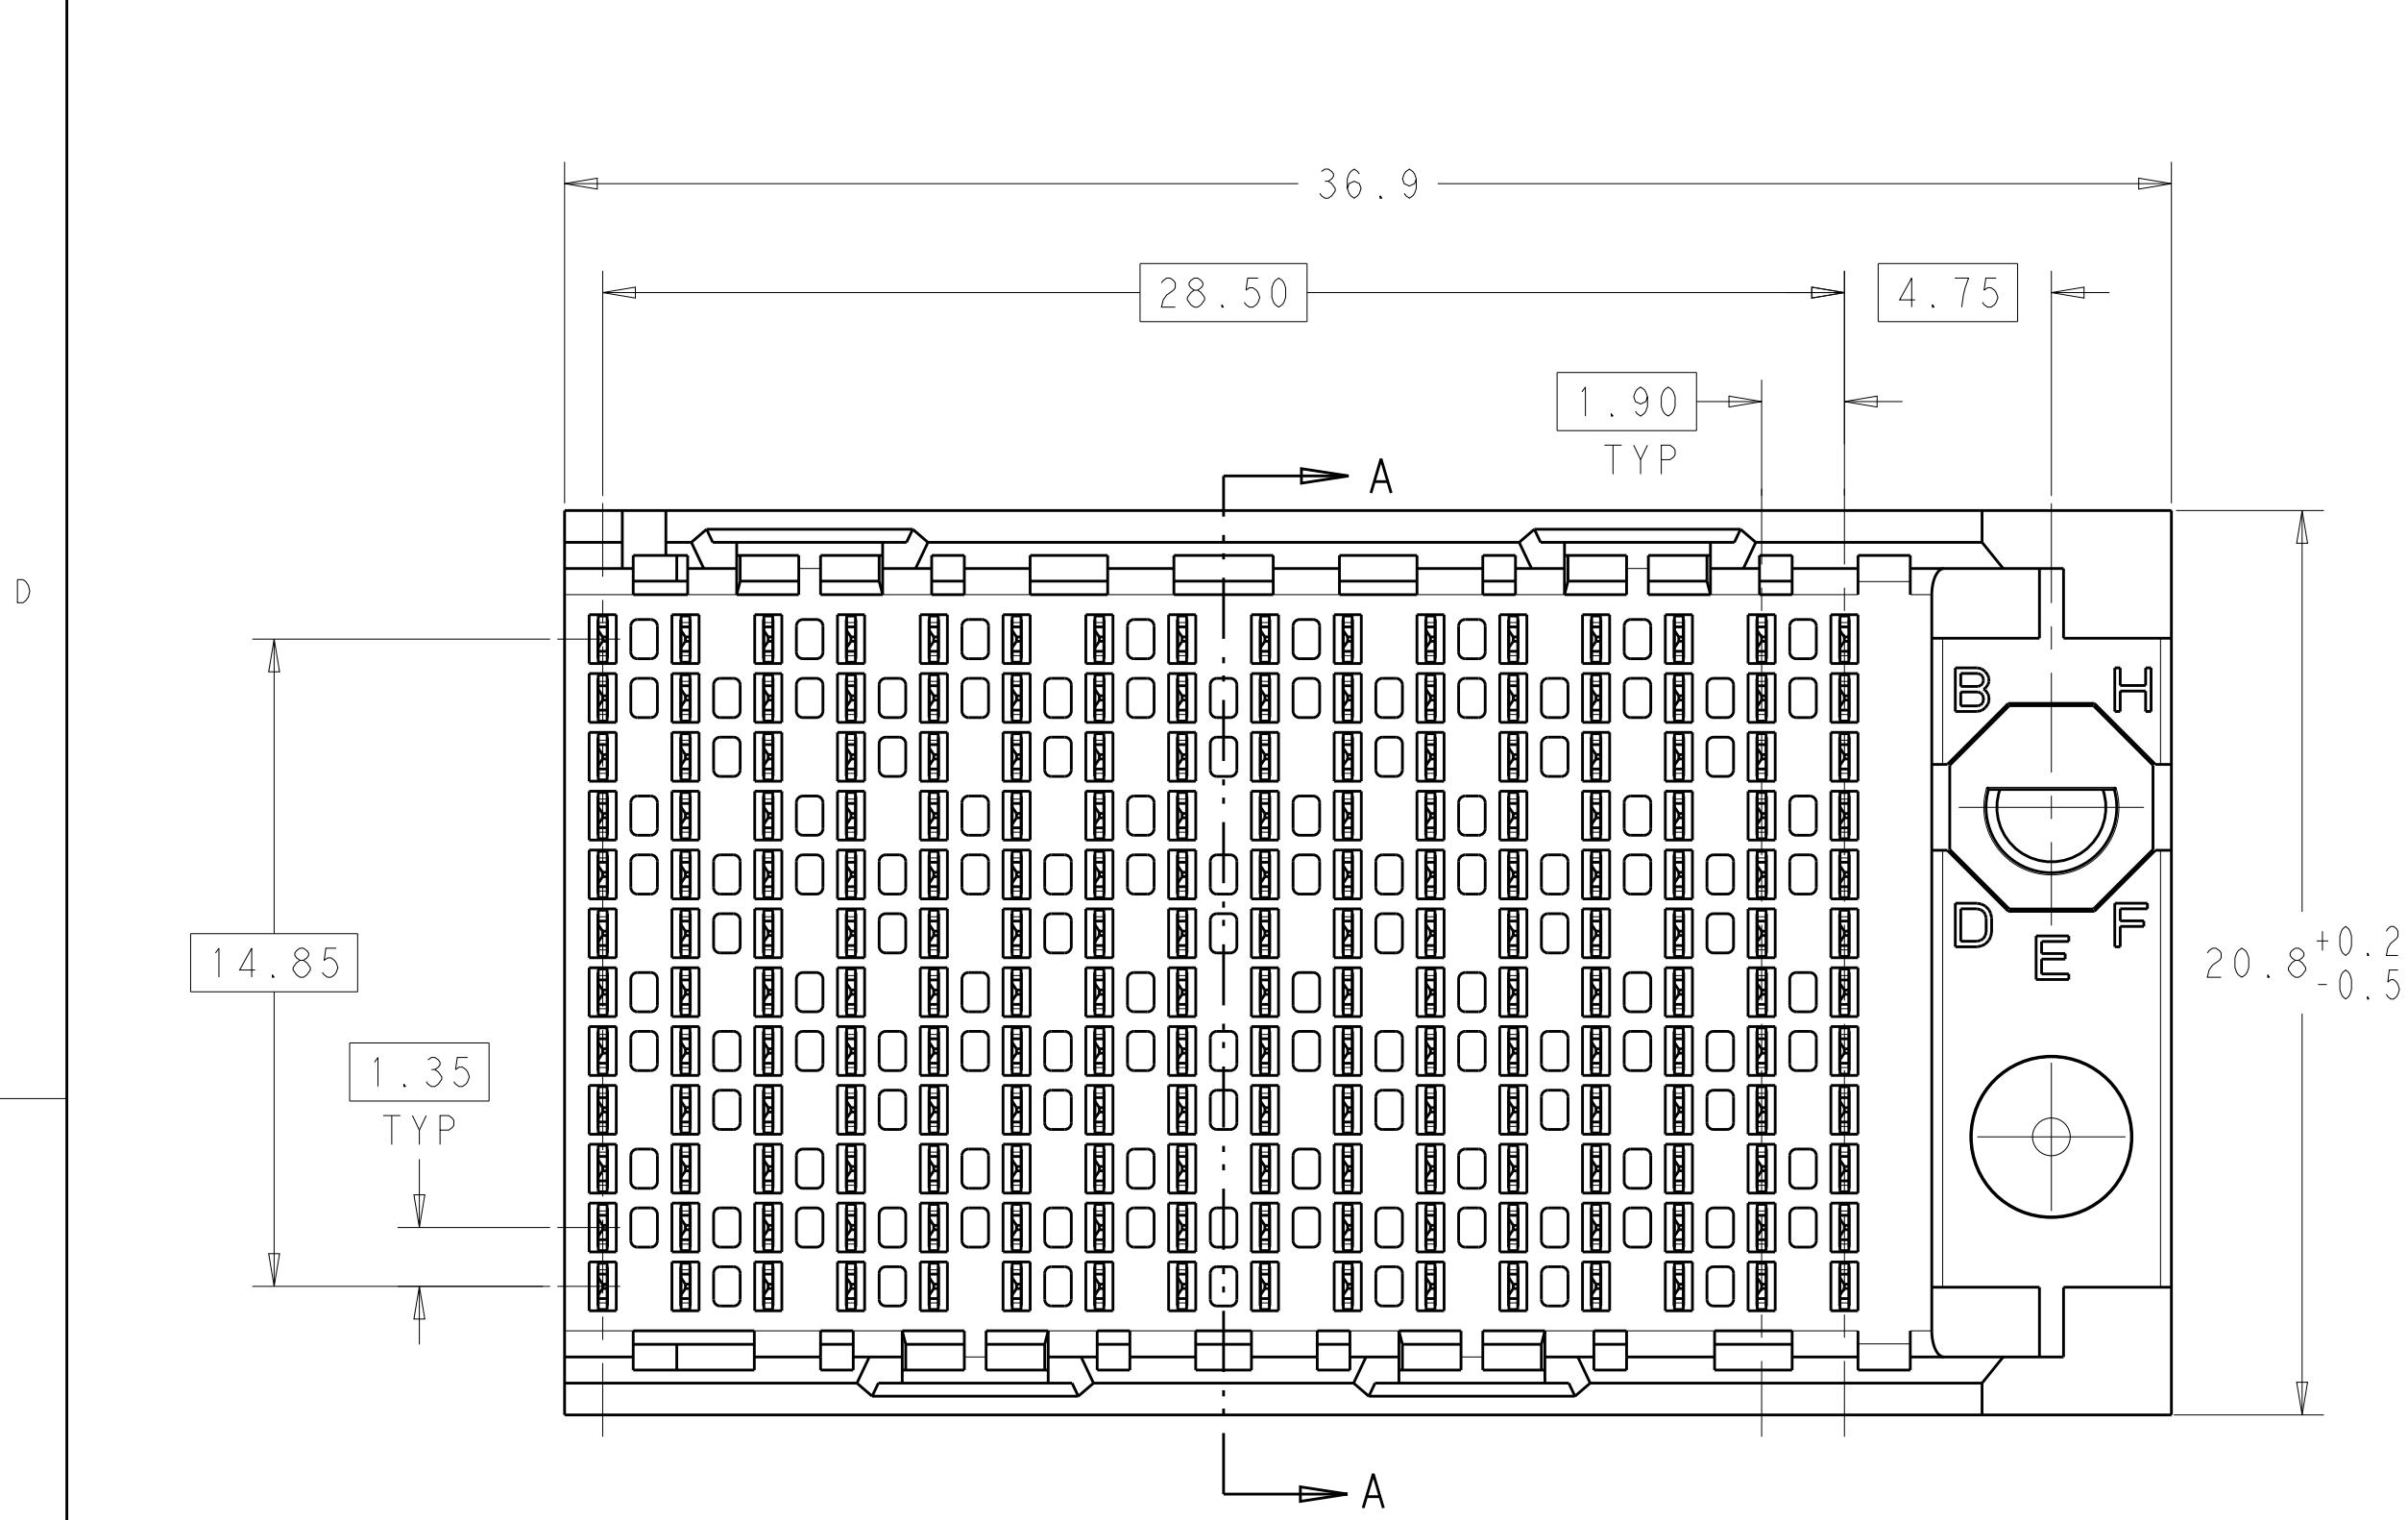
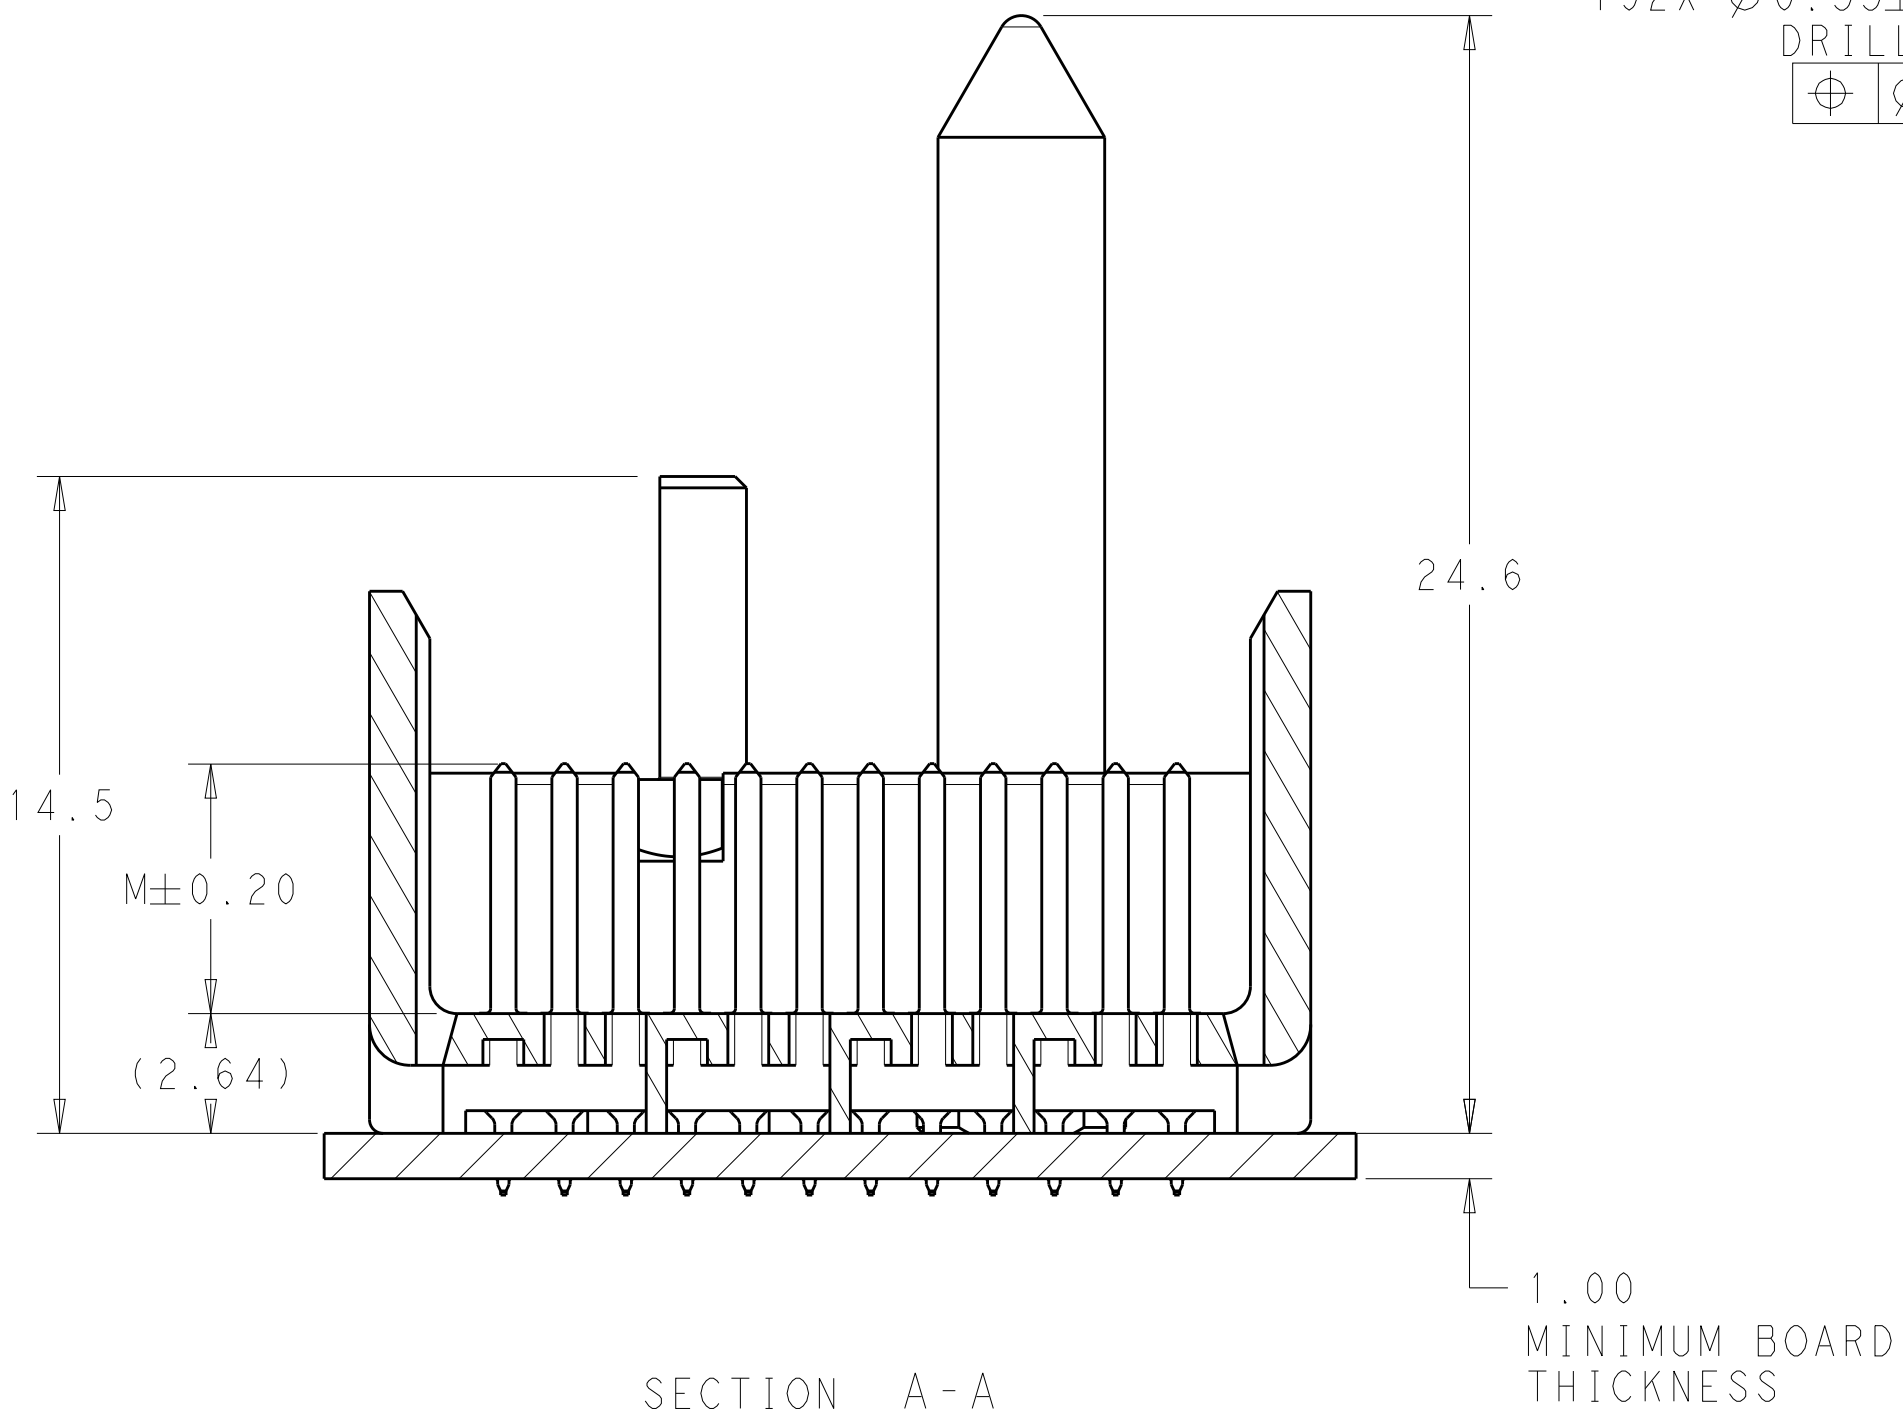


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AD	00		A	REVISED PER ECO-15-001494	05FEB2015	AP	DD

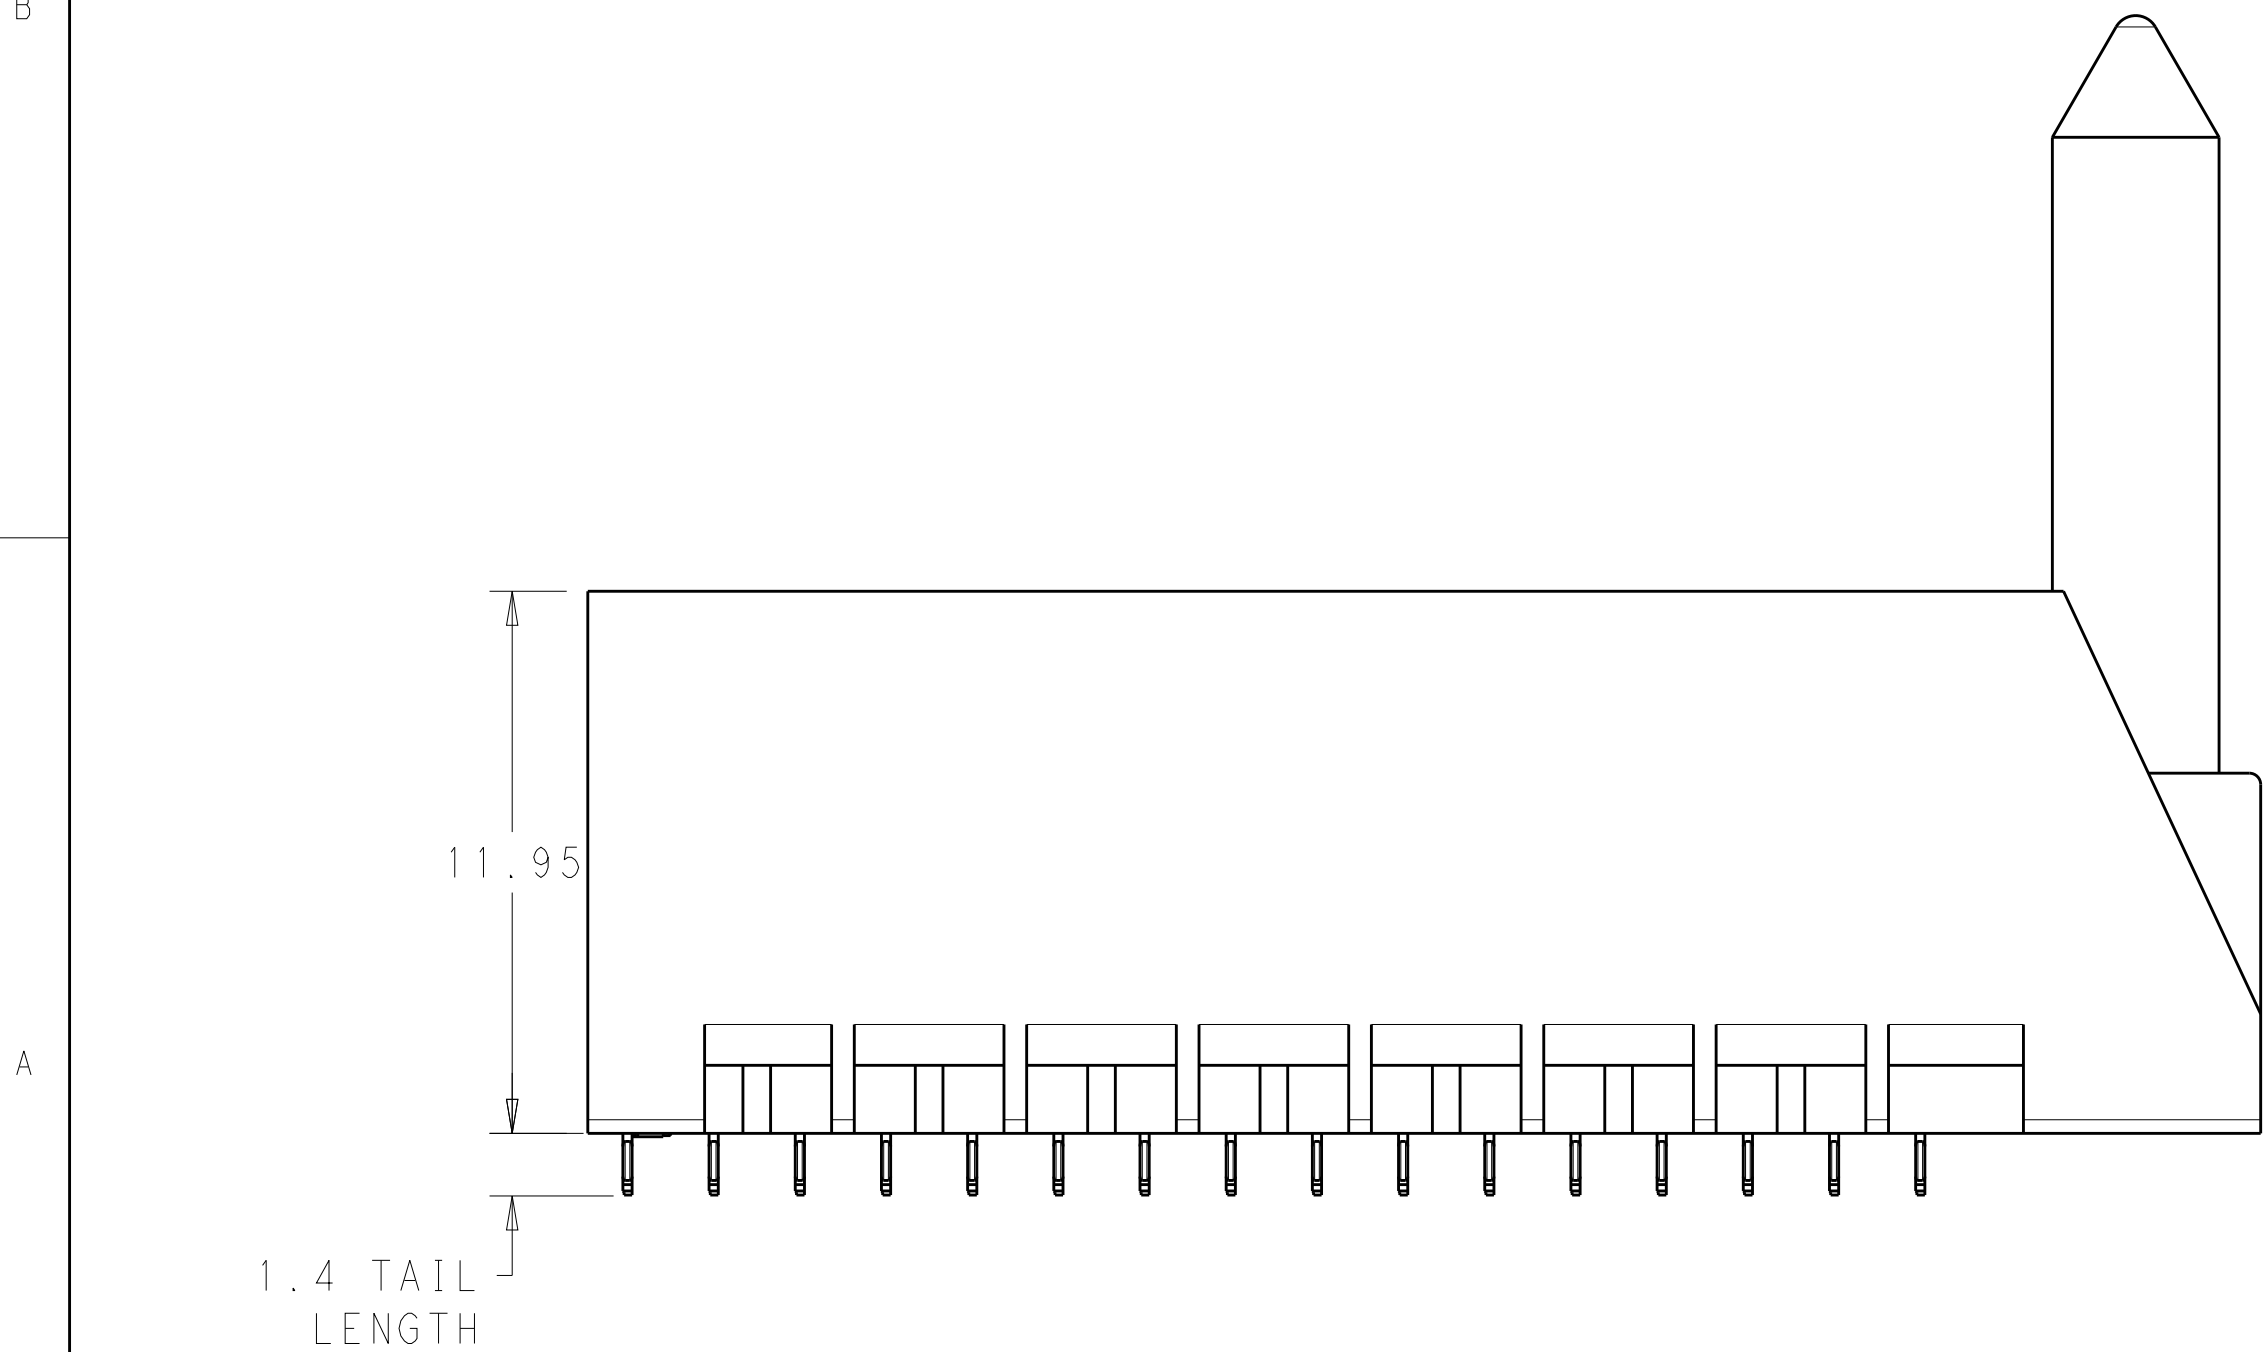

- 1 MATERIAL:
HOUSING: LCP, GLASS FILLED, UL94V-0.
TERMINALS: HIGH PERFORMANCE COPPER ALLOY.
- 2 FINISH:
30μ" MIN GOLD IN CONTACT AREA. SELECTIVE TIN
ON PCB TAILS, NICKEL OVERALL.
3. SCREWS PACKAGED IN END OF PACKAGING TUBE.
- 4 FOR GROUNDED GUIDE PIN USE $\varnothing 3.56 \pm 0.08$ PTH,
 $\varnothing 3.66$ DRILL, AND $\varnothing 6.5$ PAD.
5. KEYING PIN SHOWN IN POSITION A, SEE KEYING CHART
ON SHEET 2 FOR OTHER POSITIONS.

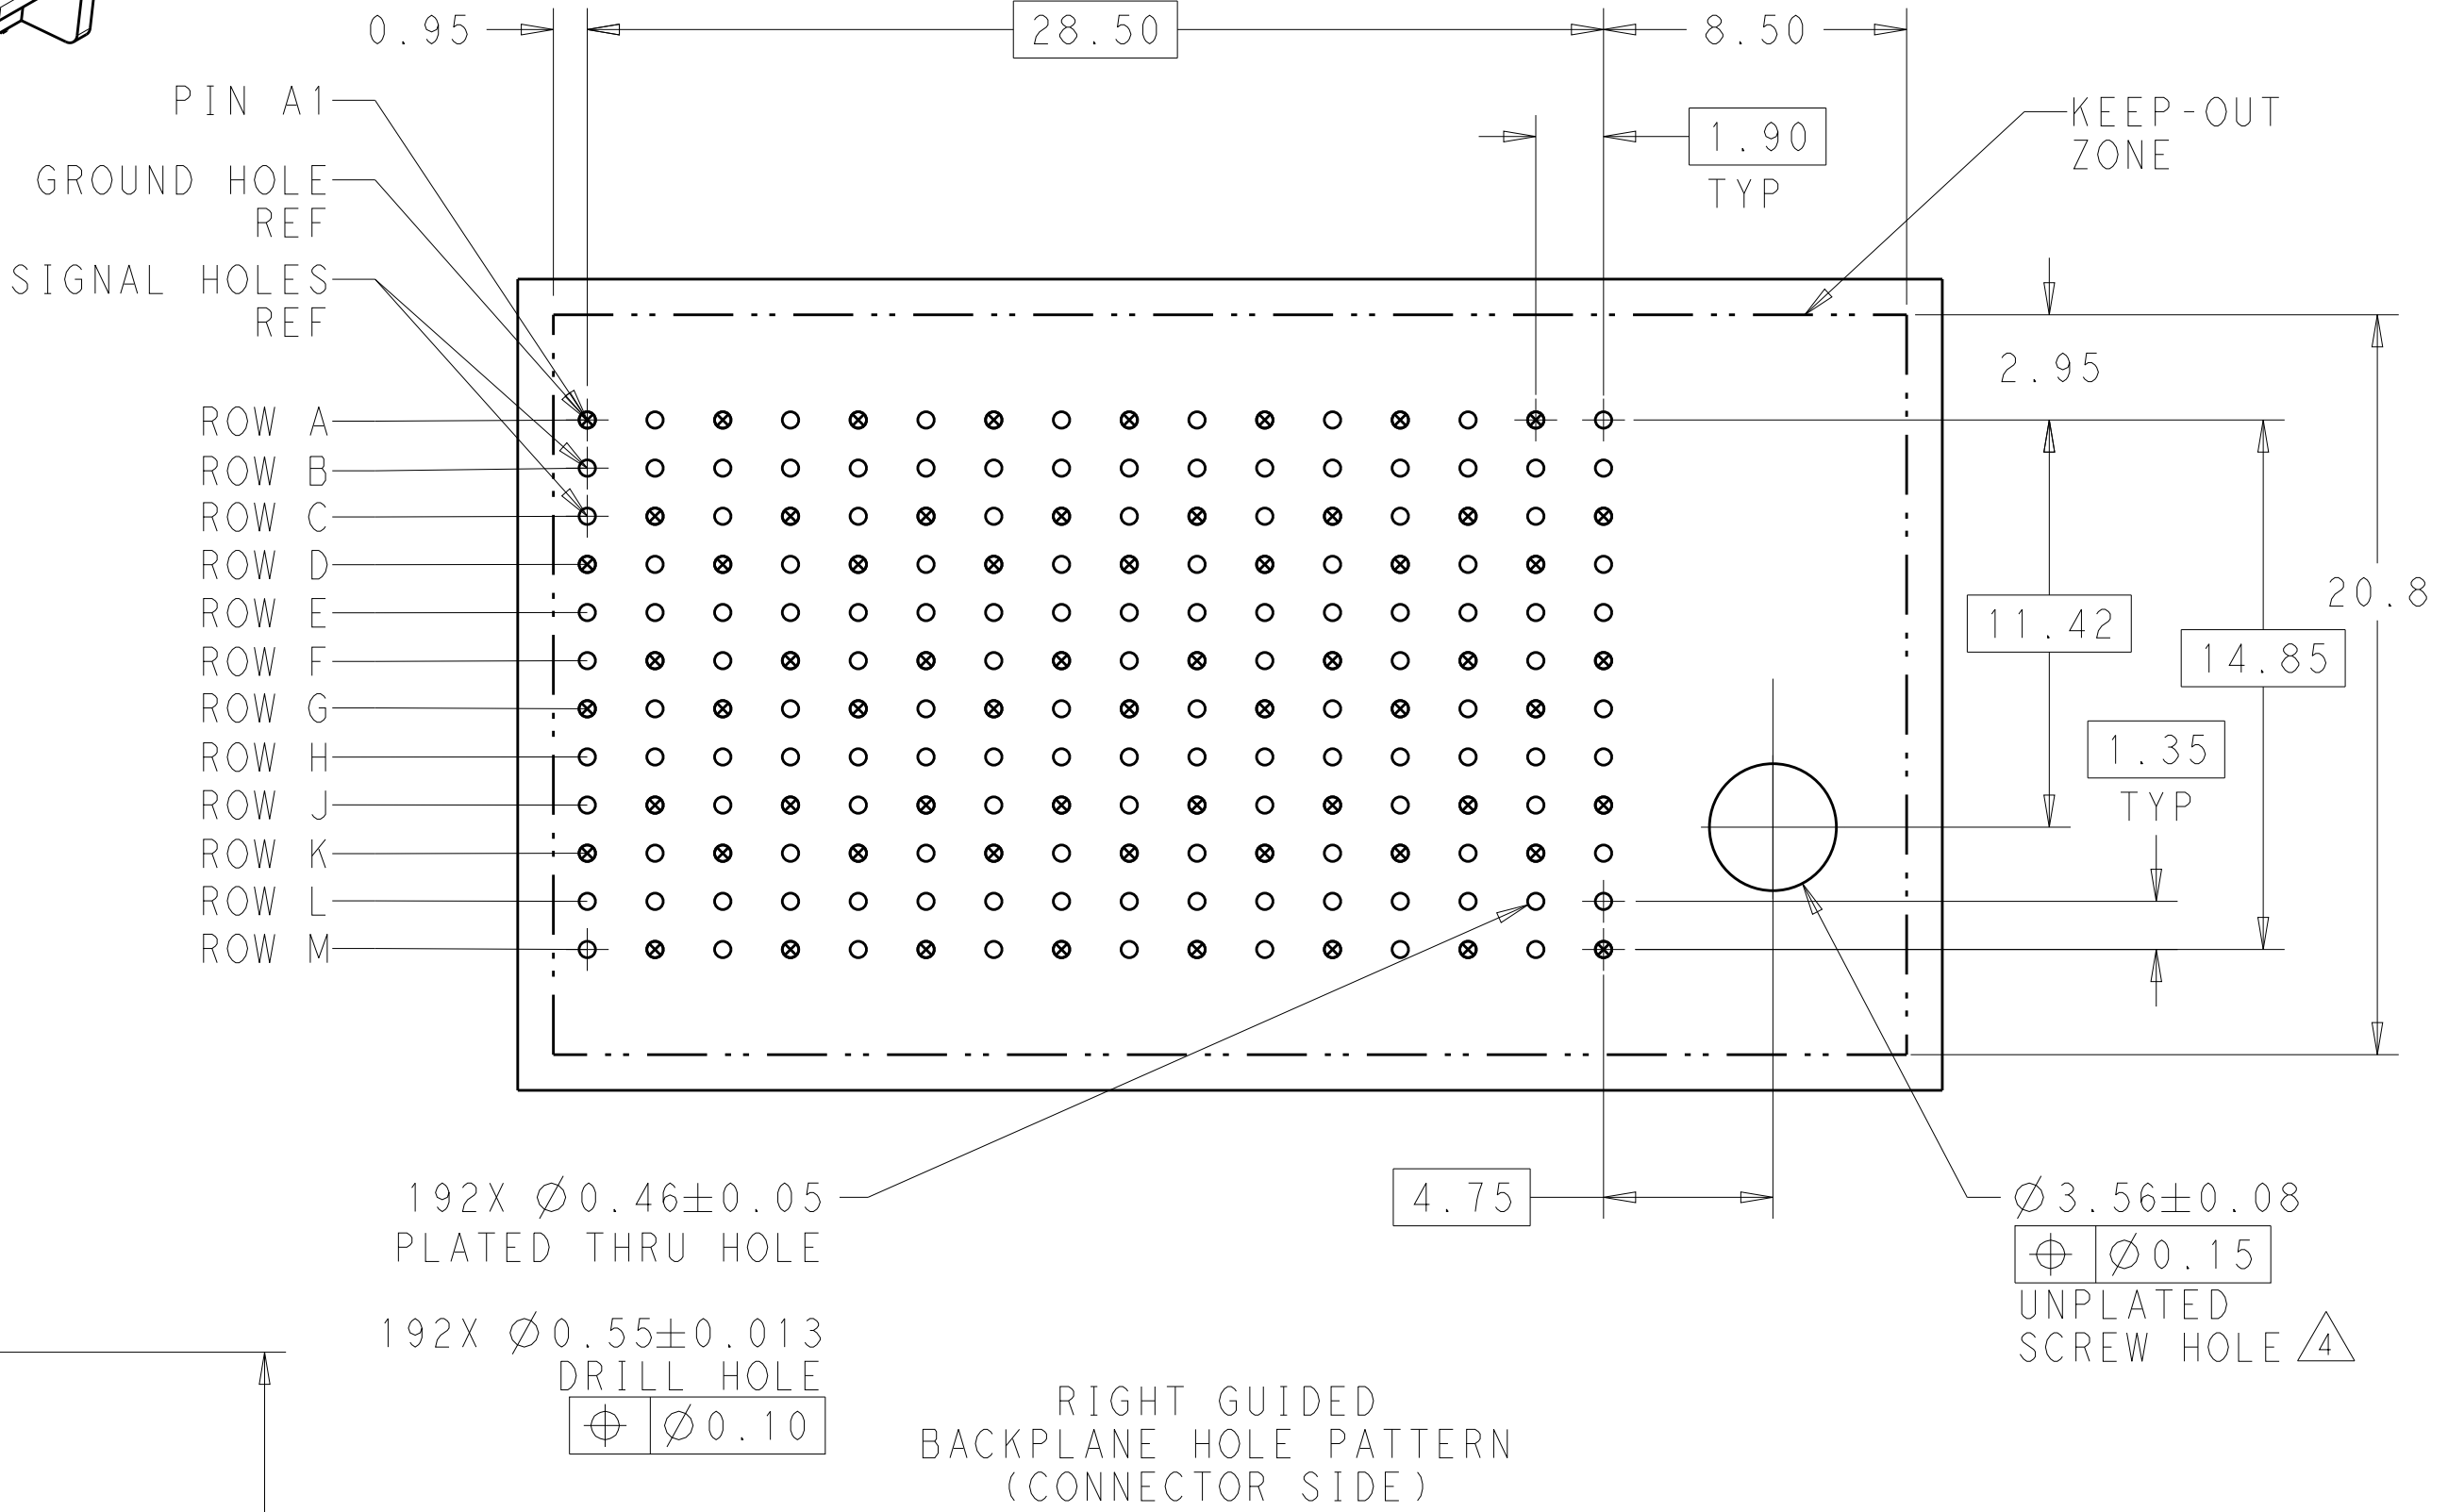

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: KIRAN HOLAL	11JAN2013	TE Connectivity	
DIMENSIONS:		CHK: D. DIXON	11JAN2013		
mm		APVD: D. DIXON	11JAN2013	NAME: IMPACT, 4 PAIR, 16 COLUMN, HEADER	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC		RIGHT GUIDED, OPEN END WALL	
0 PLC ±0.25		APPLICATION SPEC		SIGNAL MODULE, 0.46 PTH	
1 PLC ±0.13		SIZE: CAGE CODE: DRAWING NO:		RESTRICTED TO	
2 PLC ±0.13		WEIGHT: -		A100779C=2007828	
3 PLC ±0.13		Customer Drawing		SCALE: 6:1 SHEET 1 OF 2 REV A	
4 PLC ±0.13					
ANGLES: ±0.13					
FINISH: SEE TABLE					

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

	H	5.5	8-2007828-3
	H	4.9	8-2007828-2
	H	4.5	8-2007828-1
	G	5.5	7-2007828-3
	G	4.9	7-2007828-2
	G	4.5	7-2007828-1
	F	5.5	6-2007828-3
	F	4.9	6-2007828-2
	F	4.5	6-2007828-1
	E	5.5	5-2007828-3
	E	4.9	5-2007828-2
	E	4.5	5-2007828-1
	D	5.5	4-2007828-3
	D	4.9	4-2007828-2
	D	4.5	4-2007828-1
	C	5.5	3-2007828-3
	C	4.9	3-2007828-2
	C	4.5	3-2007828-1
	B	5.5	2-2007828-3
	B	4.9	2-2007828-2
	B	4.5	2-2007828-1
	A	5.5	1-2007828-3
	A	4.9	1-2007828-2
	A	4.5	1-2007828-1
	-	5.5	2007828-3
	-	4.9	2007828-2
	-	4.5	2007828-1
FINISH	KEY POSITION	DIM M	PART NUMBER

REFER TO WWW.TE.COM
FOR PRODUCT AVAILABILITY

KEY POSITION
CHART

NONE

A

E

B

F

C

G

D

H