
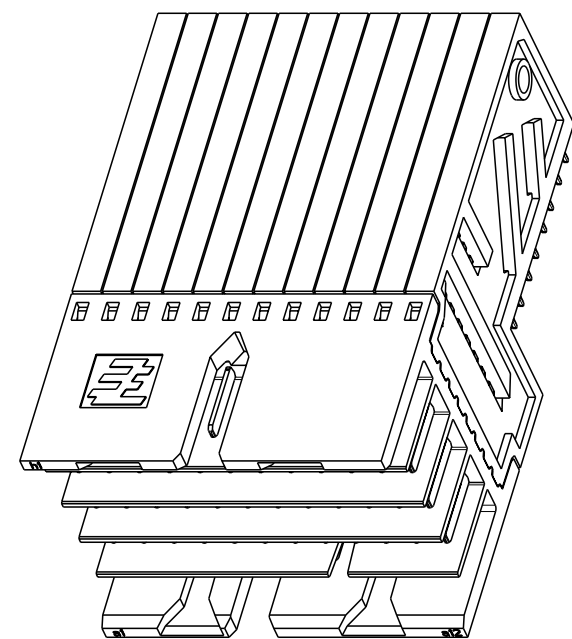
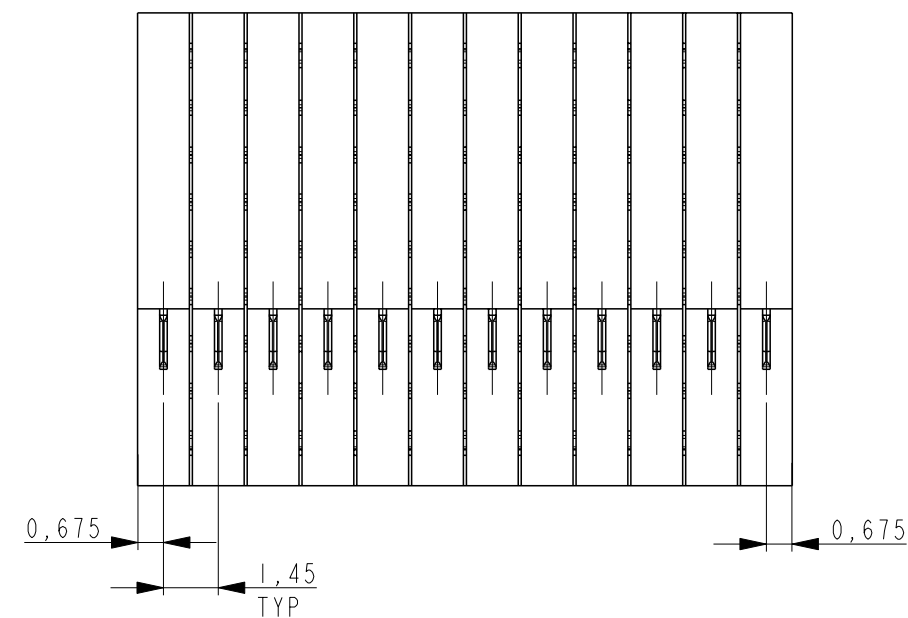
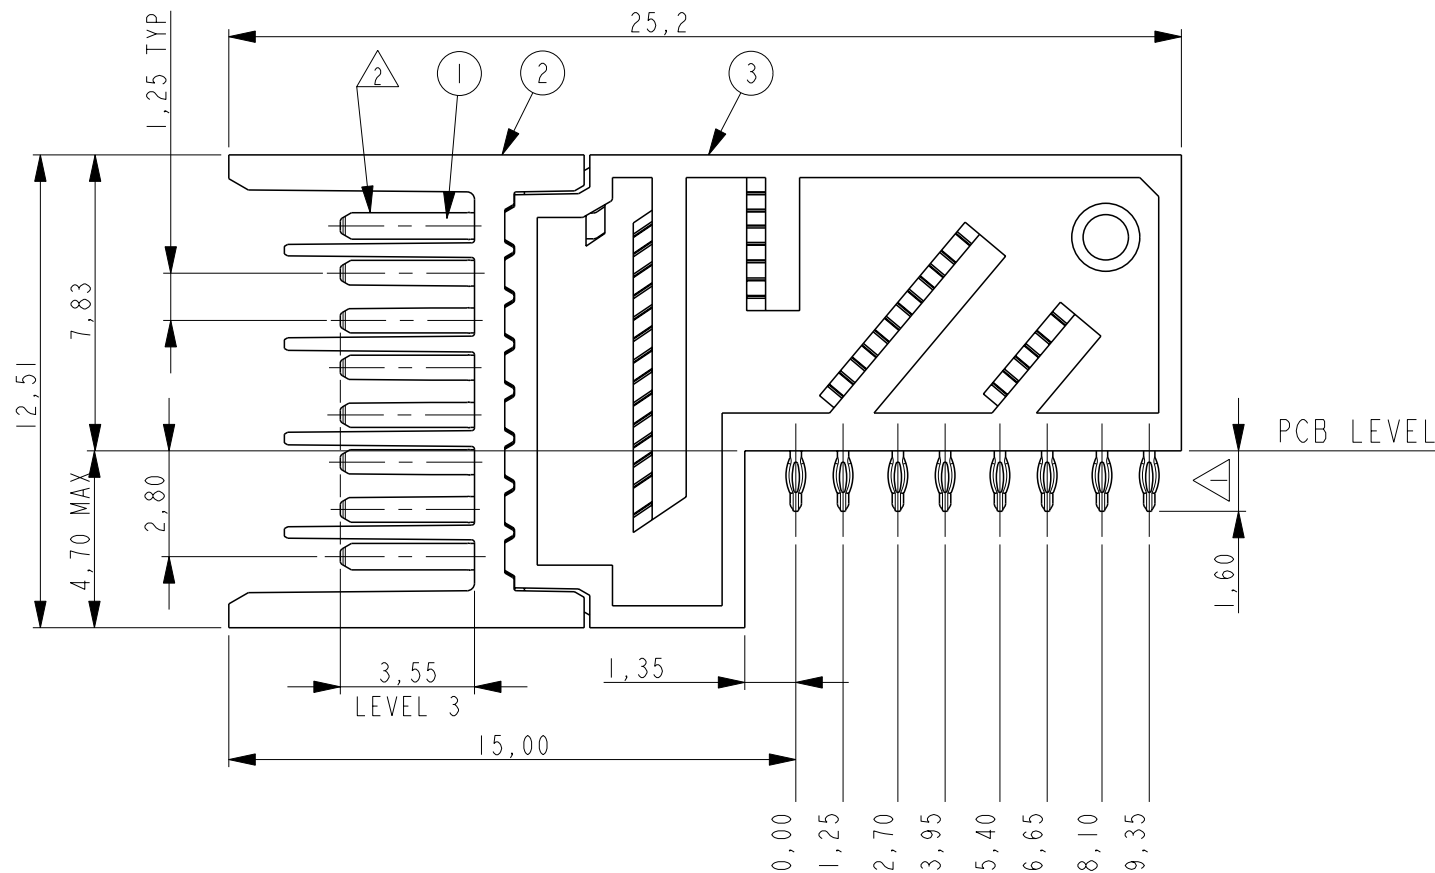
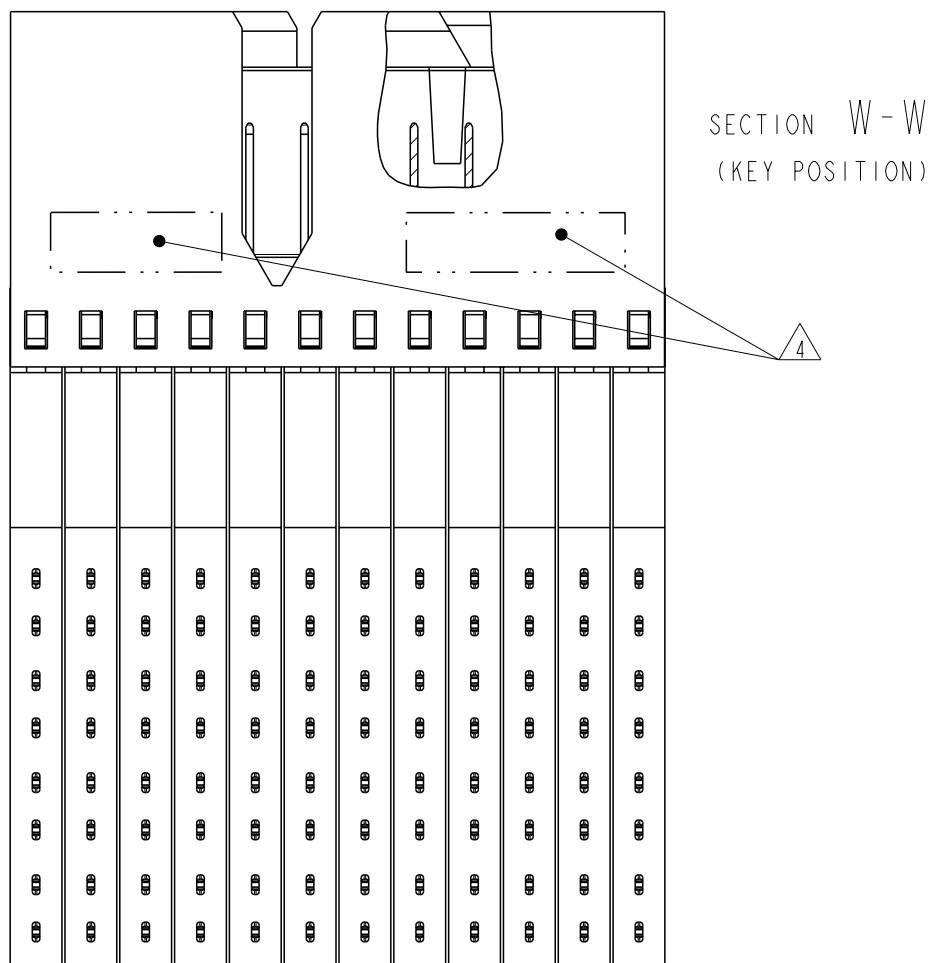
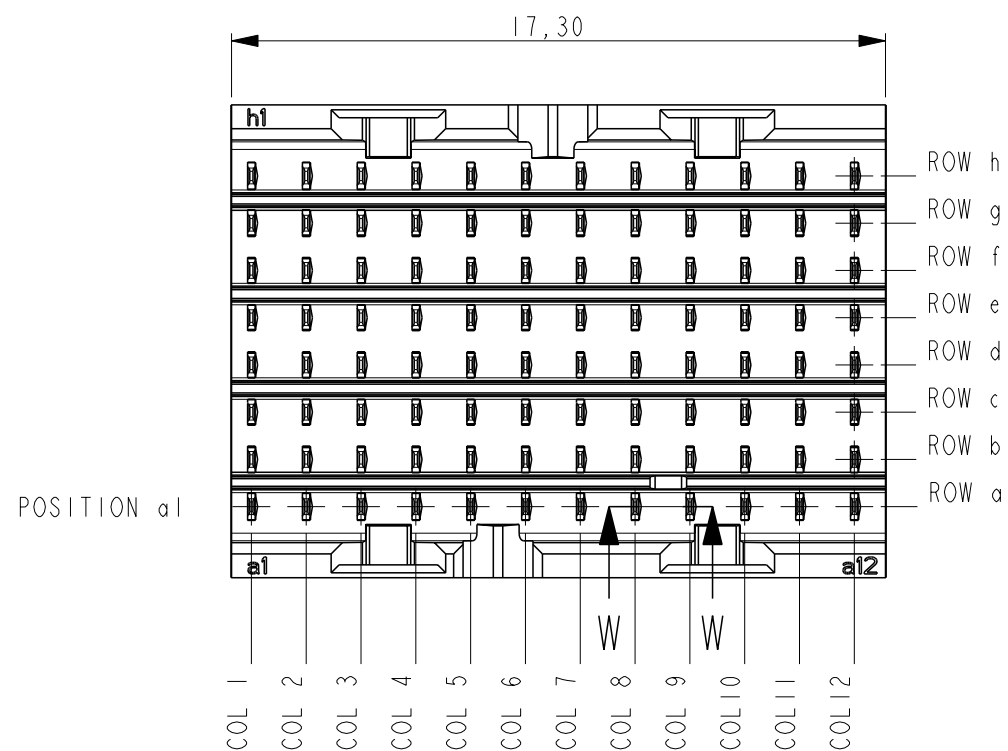


D

C

B

A

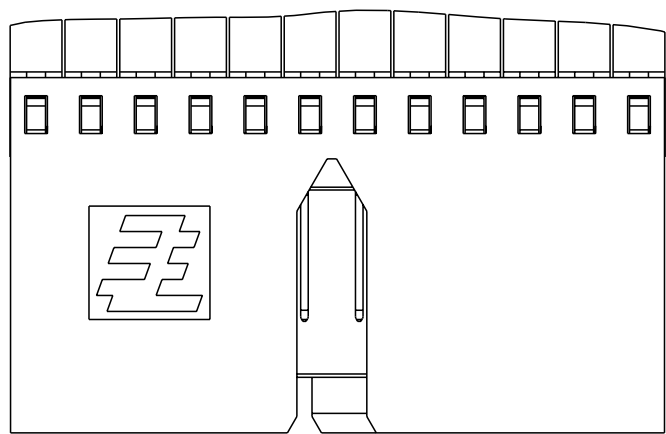

SCALE 3:1

D

C

B

A

NOTES:

- 1 PLATING: 0,5µm MIN. TIN OVER NICKEL.
- 2 PLATING:

PARTNUMBER	PERFORMANCE LEVEL
2042139-1	PERFORMANCE LEVEL 1: CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL III: UNCONTROLLED ENVIRONMENT APPLICATIONS. SEE PRODUCT SPEC 108-19353
2042139-2	PERFORMANCE LEVEL 2: CONFORMS TO ALL TESTING ACCORDING PRODUCT SPEC 108-19320, -250 MATING CYCLES, 4 DAYS MIXED GAS TEST PER IEC 60068-2-60 METHOD 1

- 3 CONSULT APPLICATION SPEC OR CONTACT TE CONNECTIVITY FOR PERMISSIBLE CONTACT ASSIGNMENTS.
- 4 CONNECTOR MARKED WITH PARTNUMBER AND DATE CODE.
- 5 FOR PC-BOARD ROUTING RECOMMENDATIONS SEE SPEC 114-19140

Ø0,40 REF FINISHED HOLE
SEE APPLICATION SPEC
⊕ 0,05 X Z

-Z-

1,15±0,10

POSITION a1

0,00
1,25
2,70
3,95
5,40
6,65
8,10
9,35

BOARD THICKNESS 1,2 MIN

RECOMMENDED PCB LAYOUT
(COMPONENT SIDE SHOWN)

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN RA 15-Apr-09
		CHK RA 15-Apr-09
		APVD -
DIMENSIONS:		PRODUCT SPEC
mm		SEE NOTE 1
		APPLICATION SPEC
		114-19106
MATERIAL		WEIGHT -
		CUSTOMER DRAWING

PRODUCT HAS NOT COMPLETED
QUALIFICATION TESTING

3	OVERMOLD	PBT 20% GF GREY
2	HOUSING	LCP 30% GF NATURAL
1	CONTACT	COPPER ALLOY
ITEM NO.	DESCRIPTION	MATERIAL
TE Connectivity		
NAME RIGHT ANGLE MALE CONNECTOR Z-PACK Slim UHD Common Speed		
SIZE	CAGE CODE	DRAWING NO
A2	00779	C-2042139
RESTRICTED TO		-
SCALE 5:1		SHEET 1 OF 1
		REV A