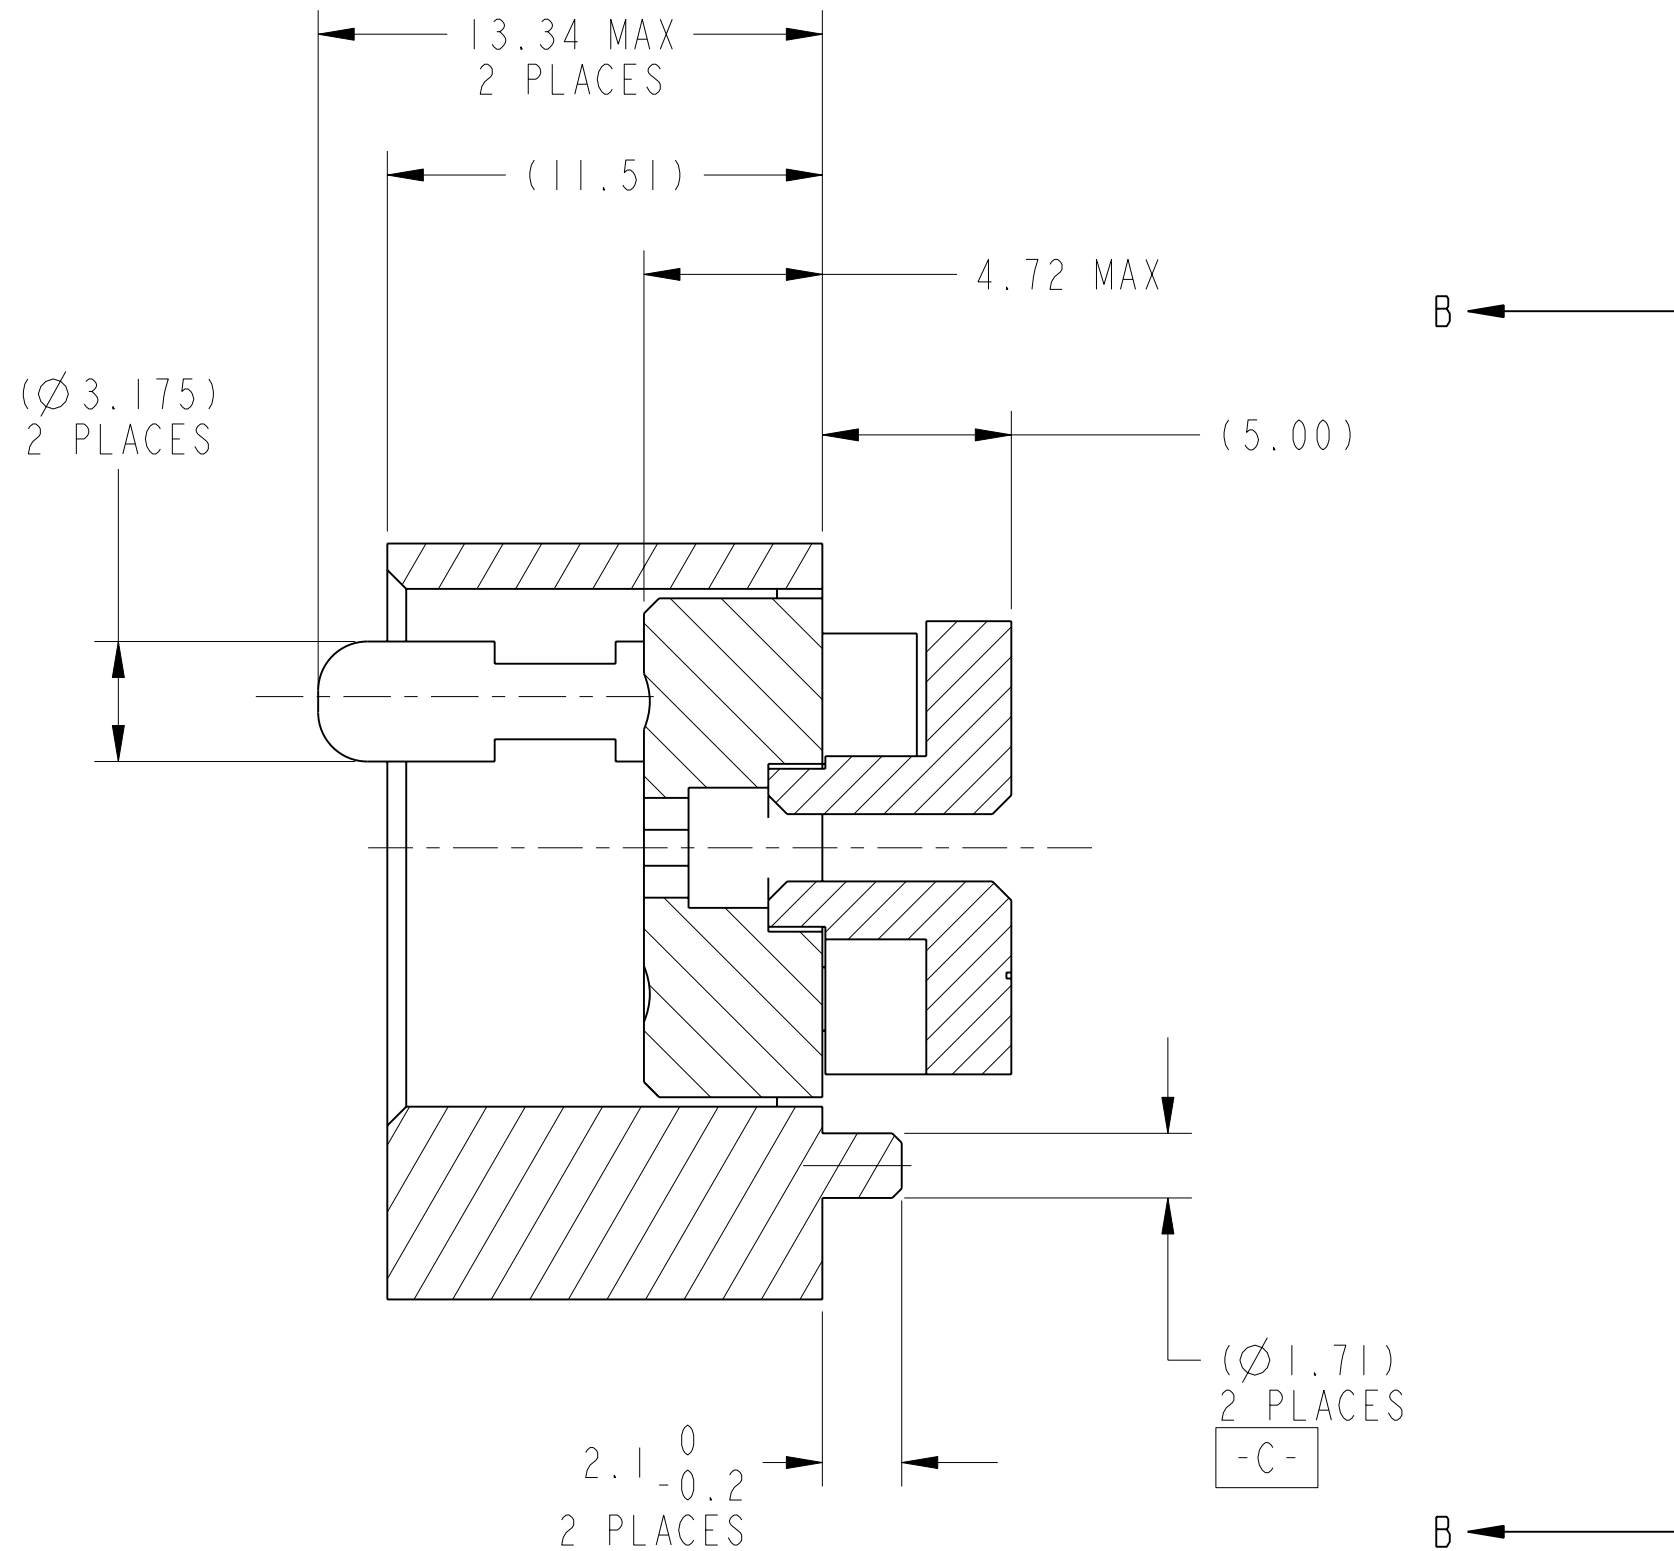
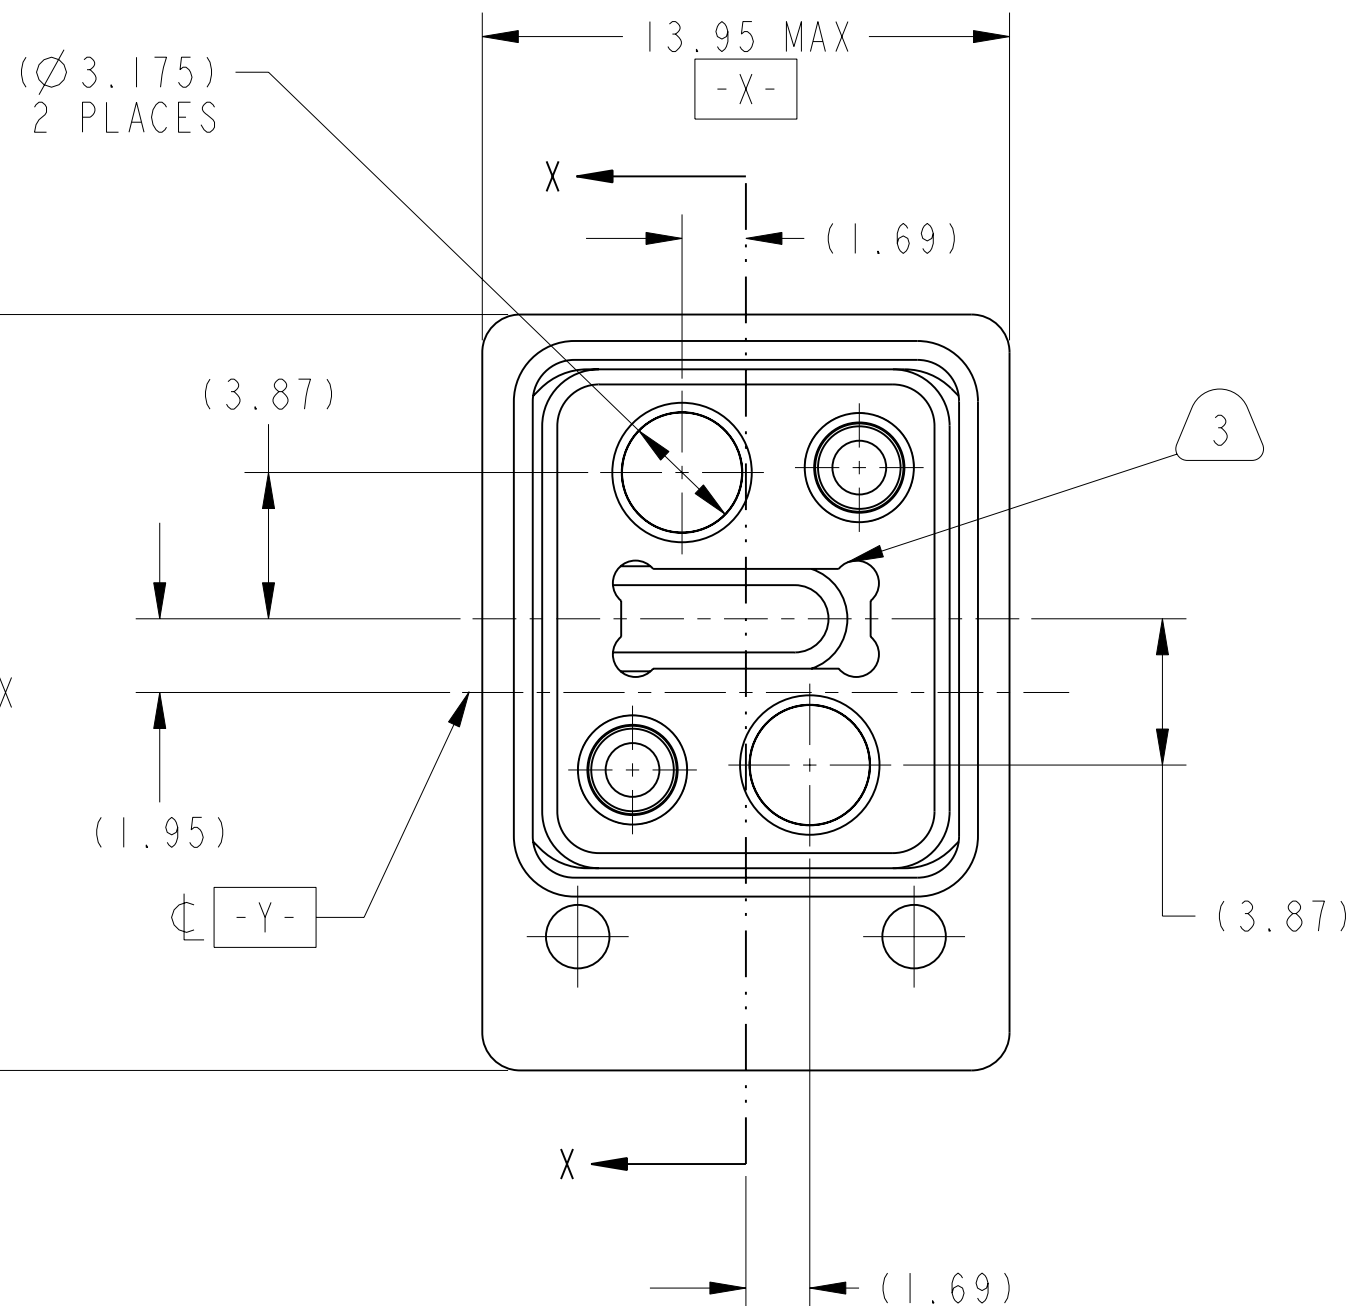


A


SEE SHEET 2


NOTES:

THE USE OF THIS DOCUMENT IS UNLIMITED.
HOWEVER, DOCUMENTS REFERENCED HEREON
MAY CONTAIN LIMITED RIGHTS DATA.


SCALE 5.000

N/A	PRO/ENGINEER INFORMATION Pro/e Model Used: 10-504639-006.DWG.ASSEMBLY Drawing Name: 10-504639-006
N/A	
NEXT ASSEMBLY	


UNLESS OTHERWISE SPECIFIED		SPECIFICATIONS		POS	QTY	PART NUMBER	DESCRIPTION	NOTE	
LINEAR DIMENSIONS ARE IN INCHES TOLERANCES: .XXXX = ±.0005 ANGLES= ±2° .XXX = ±.010 .XX = ±.03 .X = ±.1 ----- DIM. & TOL. PER ASME Y14.5M; DRM PER MIL-DTL-31000; OTHER Amphenol Stds. PER 9-3800  LEGENDS: -FLAG NOTE CALL OUT REFERENCE ONLY		MATERIAL SPEC.		PARTS LIST					
		NA		APPROVALS		DATE	AMPHENOL CORPORATION 40-60 DELAWARE AVENUE SIDNEY, N.Y. 13838 CONNECTOR, FIBER OPTIC, BACKPLANE, 1 MT (VITA 66.4)		
				PREPARED BY R. CHAPMAN	19-Oct-15				
				ENGINEER IN CHARGE J. PAUL					
				DESIGN MANAGER R. SELFRIDGE					
		DESIGN ACTIVITY GROUP BLP							
PROCESS SPEC.		THIRD ANGLE PROJECTION							
9-3895 9-3856-5				SIZE C	CAGE CODE 77820	DOCUMENT NO. 10-504639-006		REV. PA1	
				SCALE: 3.0 REF:		NA		SHEET 1 OF 3	

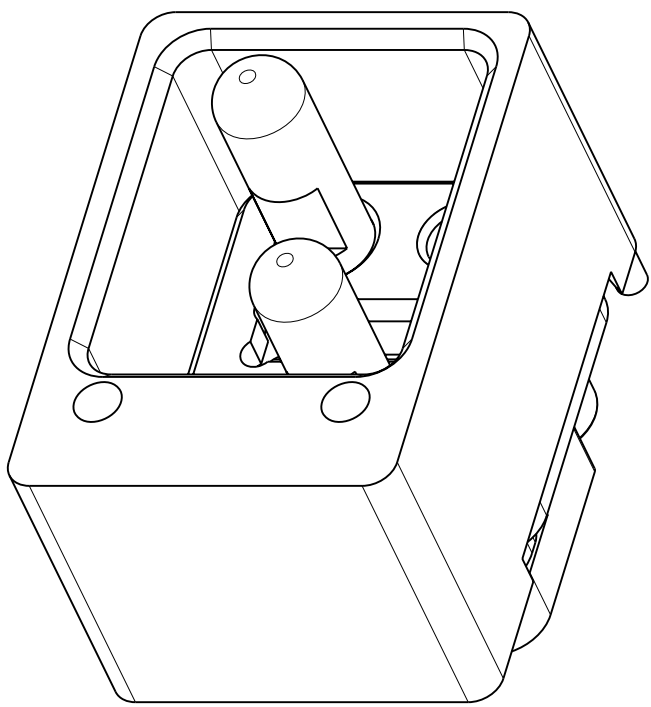

SCALE 4.000

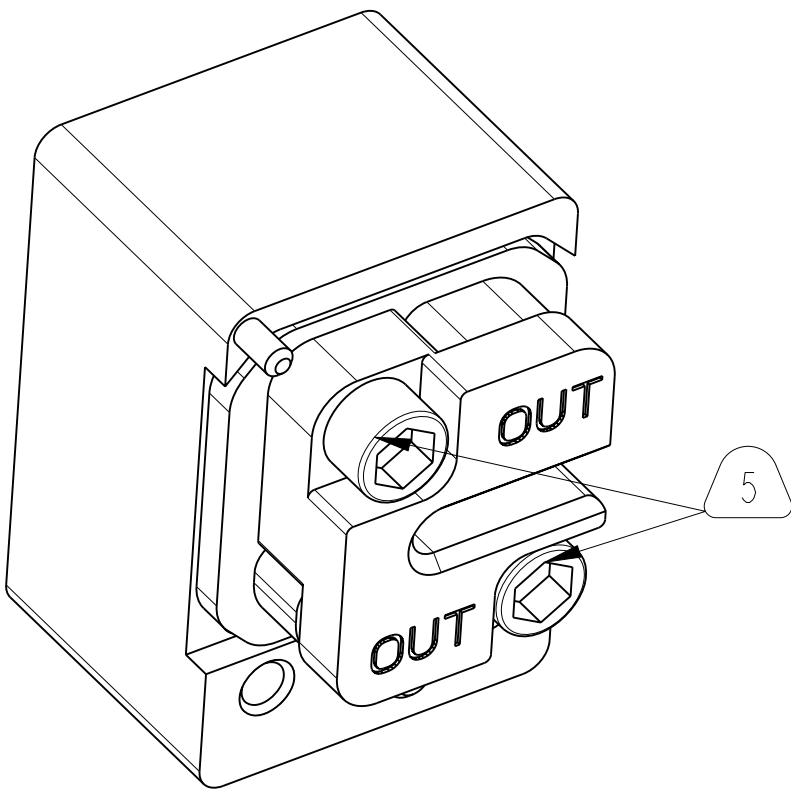

SCALE 4.000

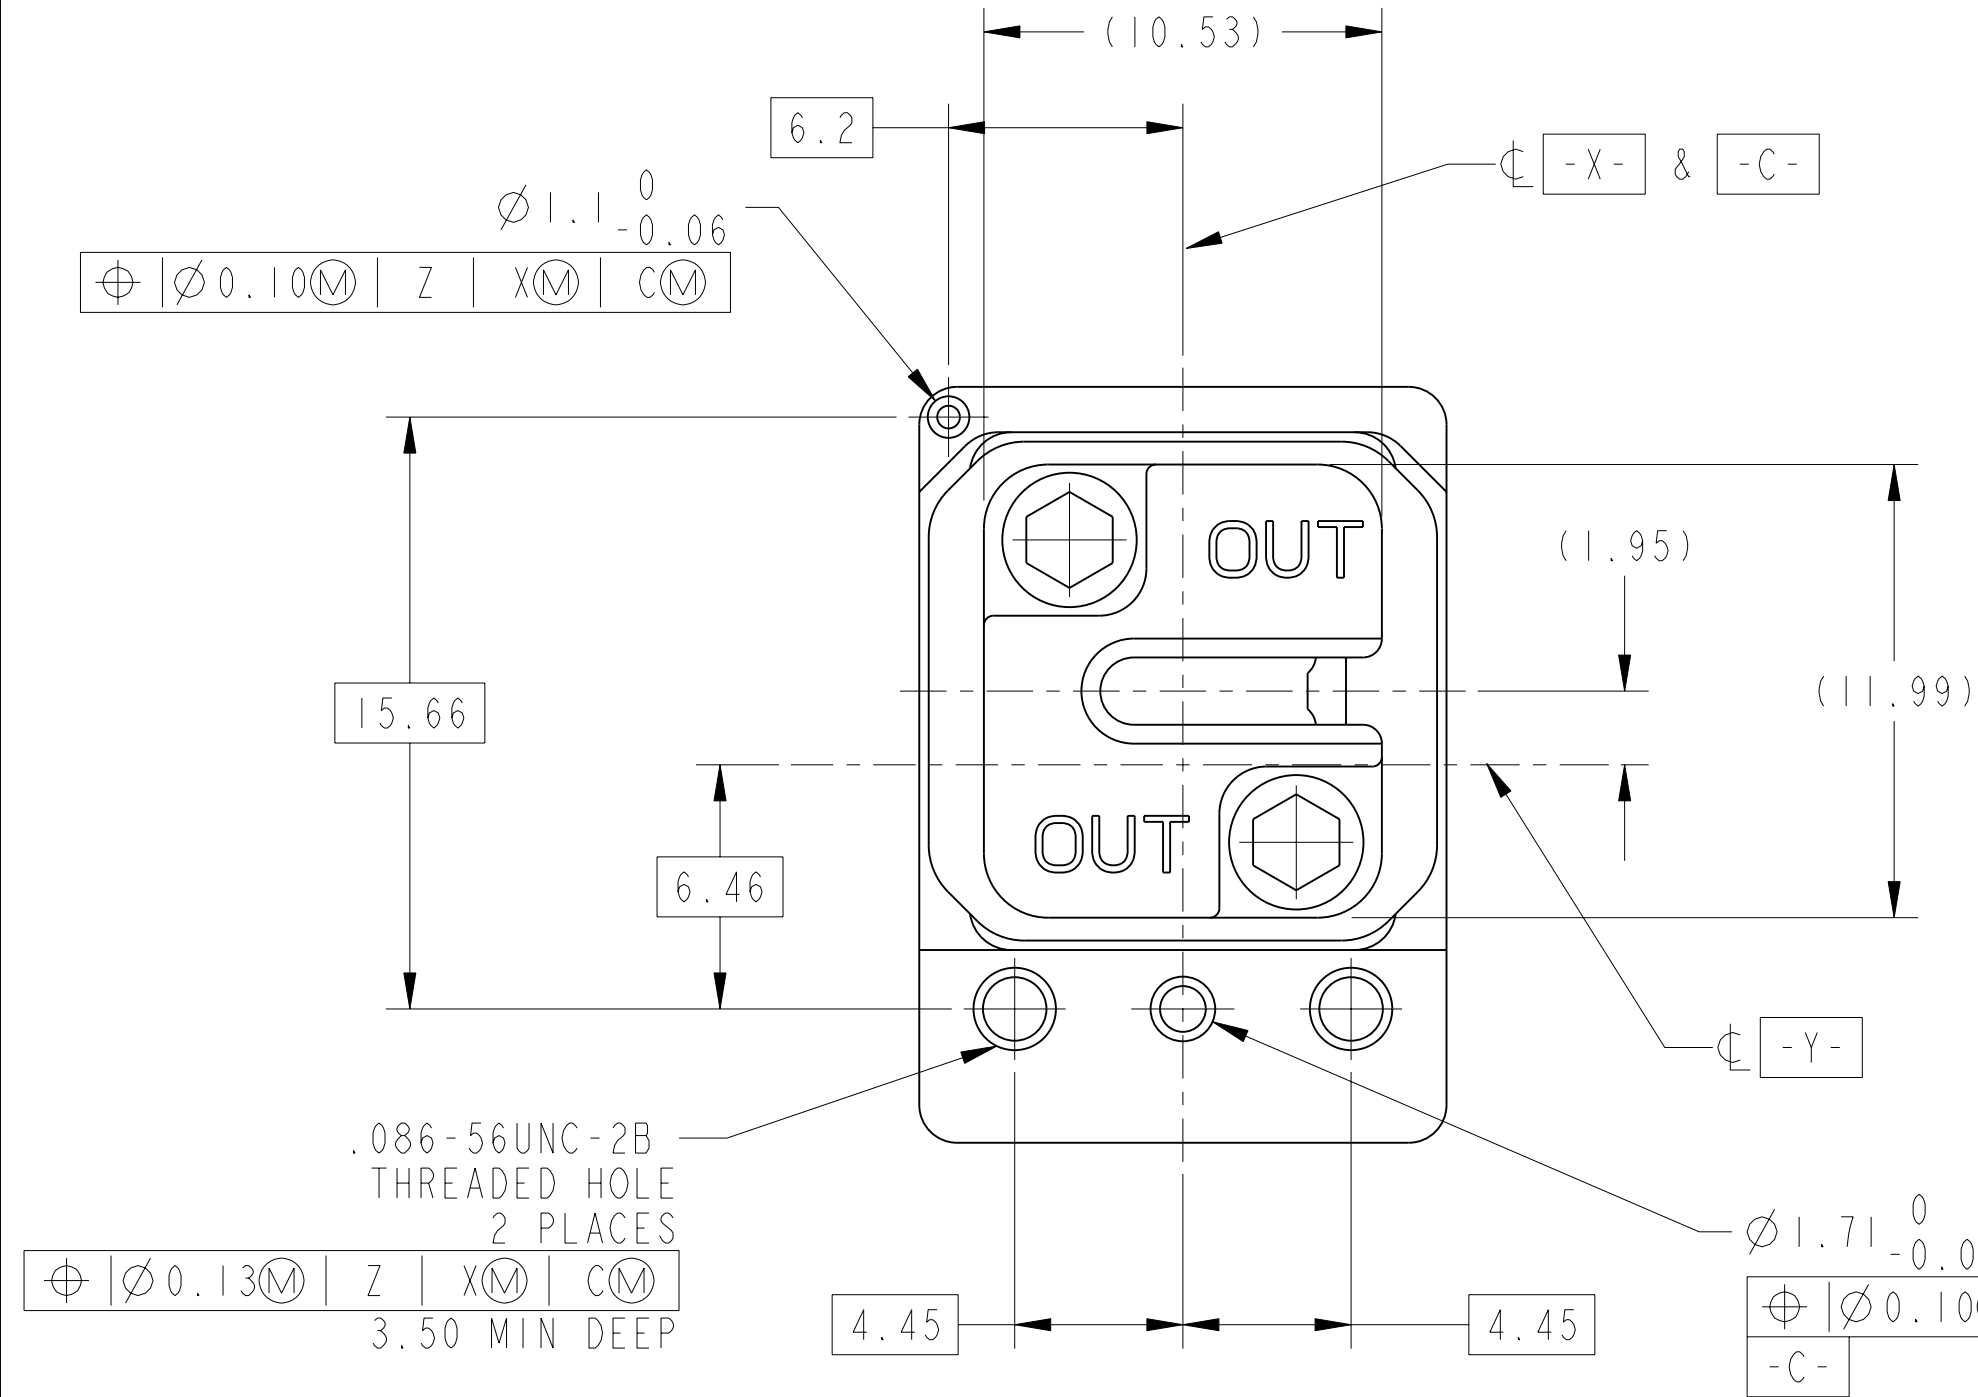

VIEW AT B

7. FOR CONNECTOR INSTALLATION ILLUSTRATION SEE SHEET 3.
6. FOR MATING MODULE CONNECTOR ASSEMBLY, SEE DRAWING 10-504637-008.
5. TIGHTEN CAPTIVE SCREWS TO 10-14 IN-OZ AFTER INSTALLING MT FERRULE (NOT INCLUDED).
4. FIBER OPTIC INSERT IS DESIGNED FOR MT TYPE FERRULES TERMINATED TO NON-STRENGTH MEMBERED RIBBON CABLE.
3. INDICATED CAVITIY WILL ACCOMODATE A STANDARD 12 CHANNEL MT FERRULE PER IEC 1754-5-4.
2. BLACK INK STAMP "AMPHENOL" PART NUMBER AND DATE CODE ON INDICATED SURFACE PER 9-3856-5. DATE CODE PER 9-3895. CHARACTERS TO BE .062±.020 HIGH. ADDITIONAL INFORMATION MAY BE REQUESTED BY PURCHASE ORDER.
1. PARTS ARE SHIPPED UNASSEMBLED.


THE USE OF THIS DOCUMENT IS UNLIMITED.
HOWEVER, DOCUMENTS REFERENCED HEREON
MAY CONTAIN LIMITED RIGHTS DATA.

MATERIALS AND FINISHES

COMPONENT	MATERIAL/ FINISH
BACKPLANE SHELL	BODY - MATERIAL - ALUM. ALLOY PER AMS 4150 FINISH - CHROMATE TREATMENT PER MIL-C-5541, CL 3 HELICAL INSERTS - STAINLESS STEEL 304 SERIES PASSIVATED
INSERT ASSEMBLY	FRONT INSERT/RETAINER - MATERIAL - ALUM ALLOY PER AMS 4150 FINISH - CHROMATE TREATMENT PER MIL-C-5541, CL3 SCREW - STAINLESS STEEL 300 SERIES, PASSIVATED HELICAL INSERTS - STAINLESS STEEL 304 SERIES, PASSIVATED GUIDE PIN - STAINLESS STEEL PER AMS 5640. PASSIVATED

SIZE C	CAGE CODE 77820	DOCUMENT NO. 10-504639-006	REV. PA1
SCALE: 3.0	REF.	NA	SHEET 2 OF 3


THE USE OF THIS DOCUMENT IS UNLIMITED.
HOWEVER, DOCUMENTS REFERENCED HEREON
MAY CONTAIN LIMITED RIGHTS DATA.

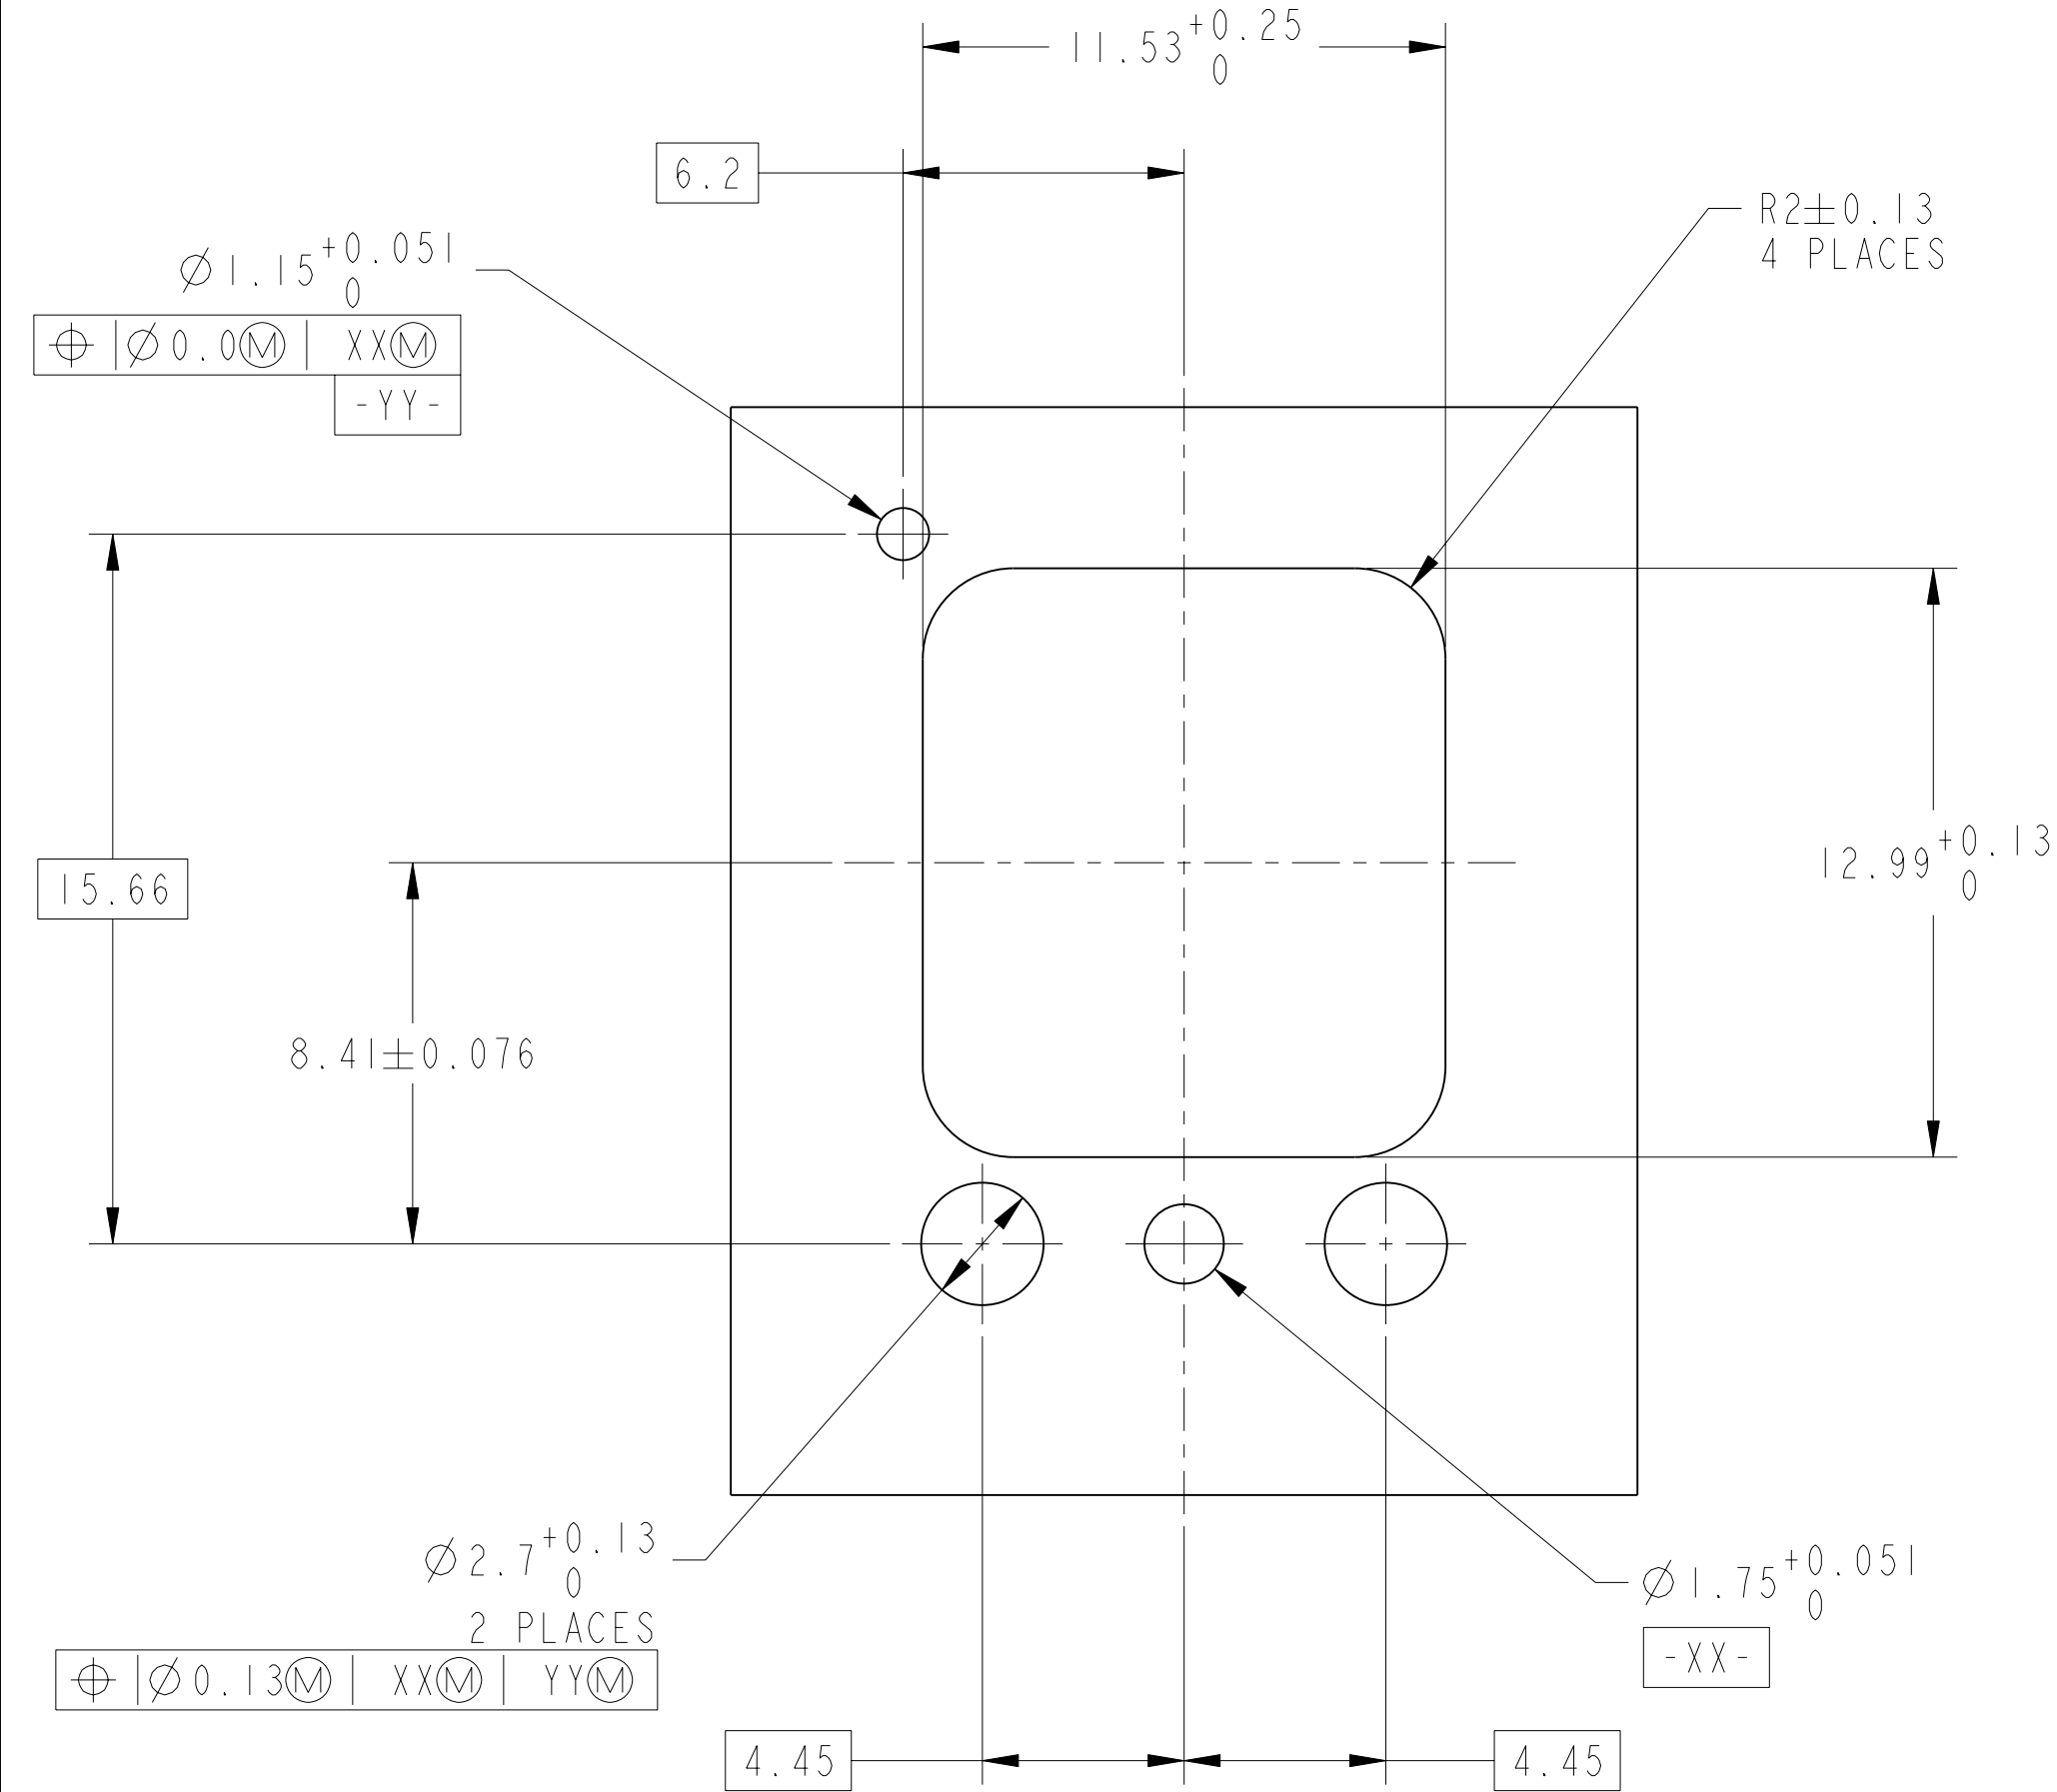

SUGGESTED BACKPLANE BOARD CUTOUTS

(CONNECTOR SIDE SHOWN)

SCALE 6.000

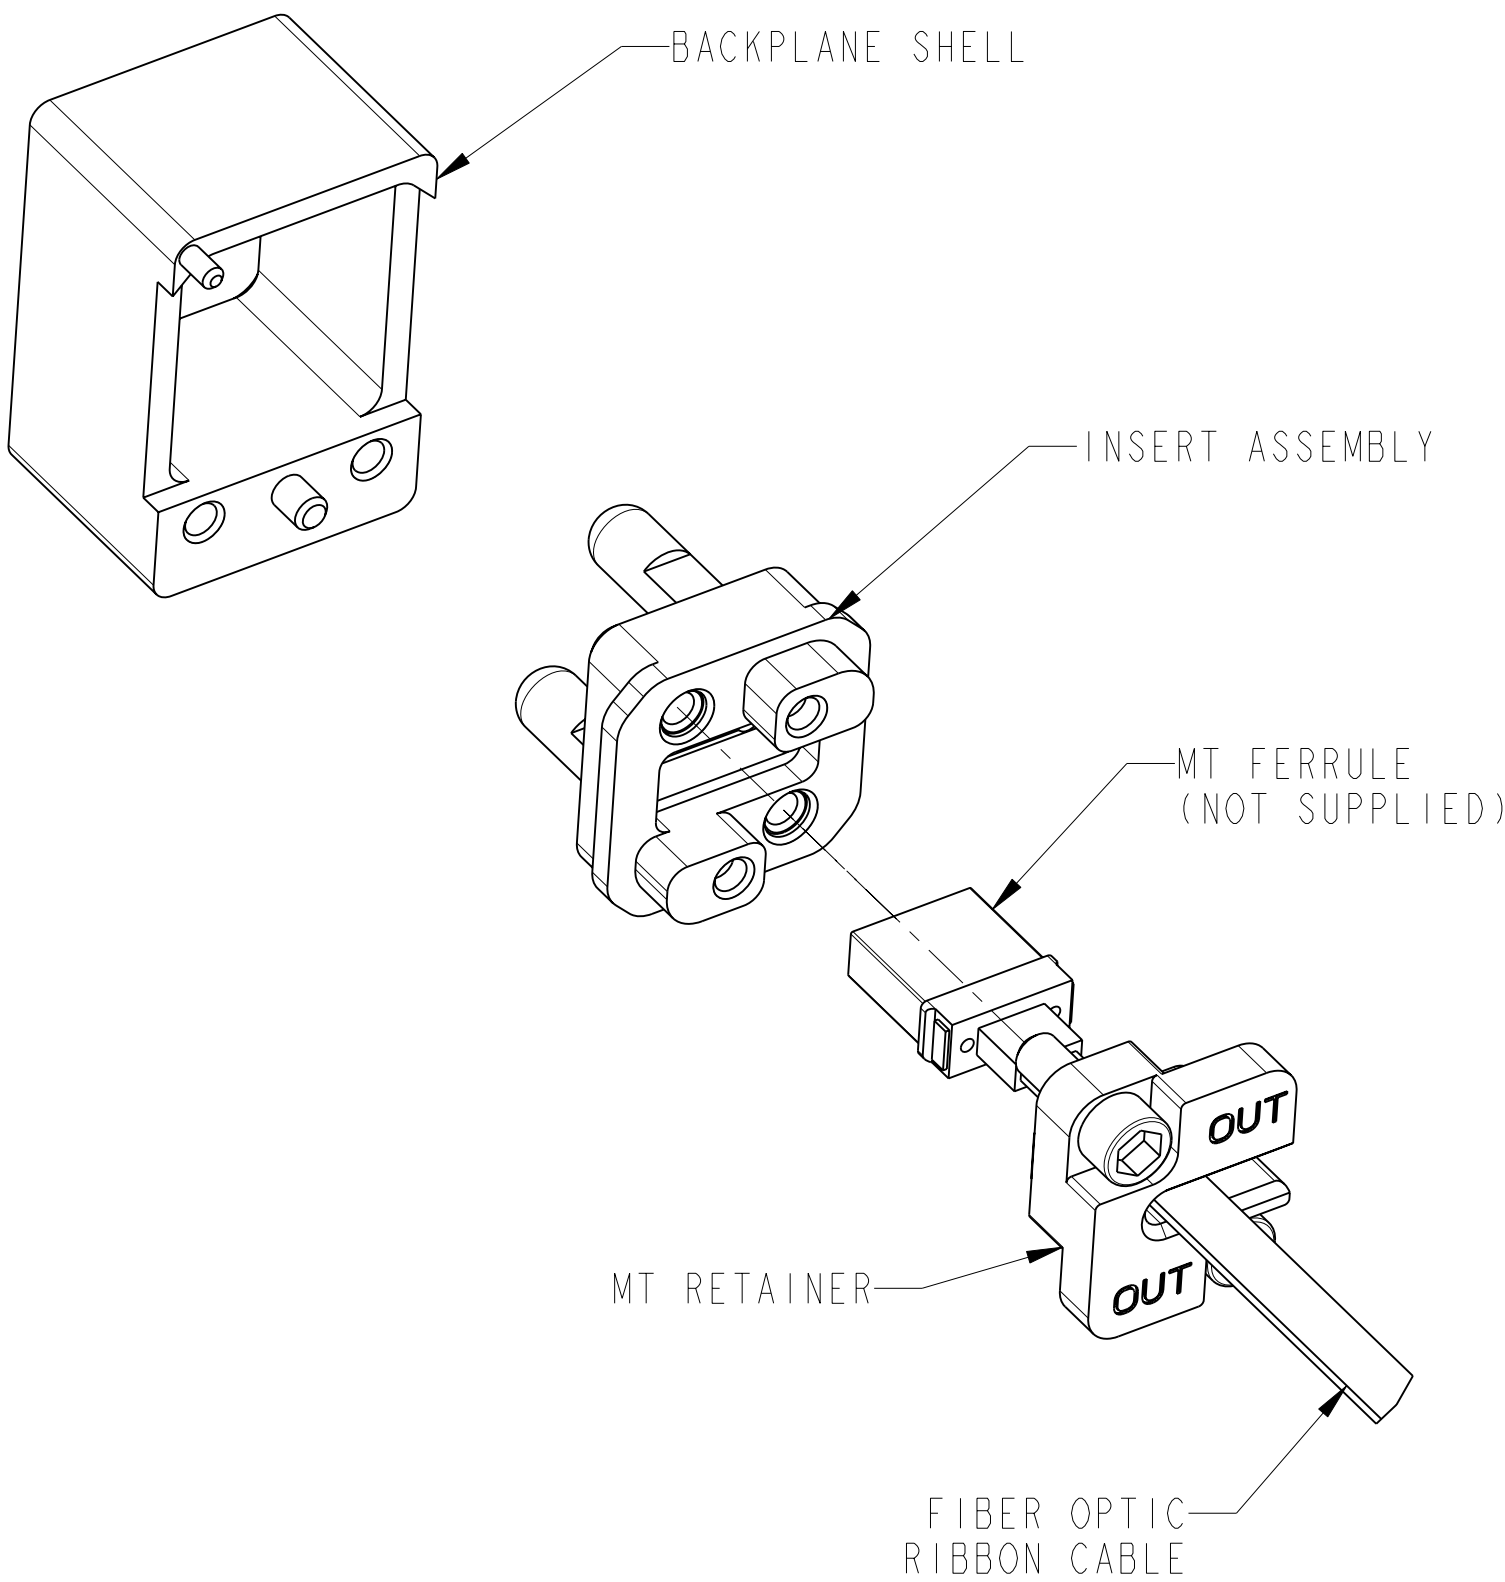

REAR EXPLODED ASSEMBLY VIEW

SCALE 3.000

SIZE	CAGE CODE	DOCUMENT NO.	REV.
C	77820	10-504639-006	PA1
SCALE: 3.0	REF:	NA	SHEET 3 OF 3