

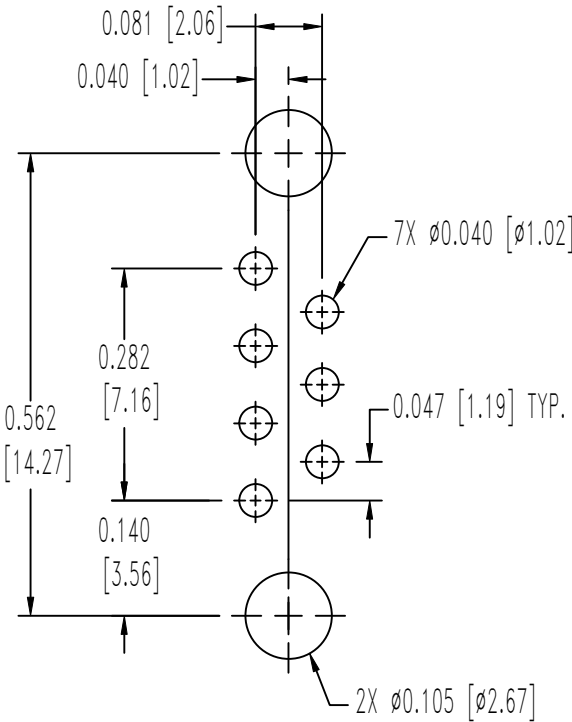


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC AND ITS SUBSIDIARIES. POSITRONIC BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

DATE	REV	REVISION RECORD	APP	DR	CK
12-29-16	NC	ECO 53700	BF	AP	BF

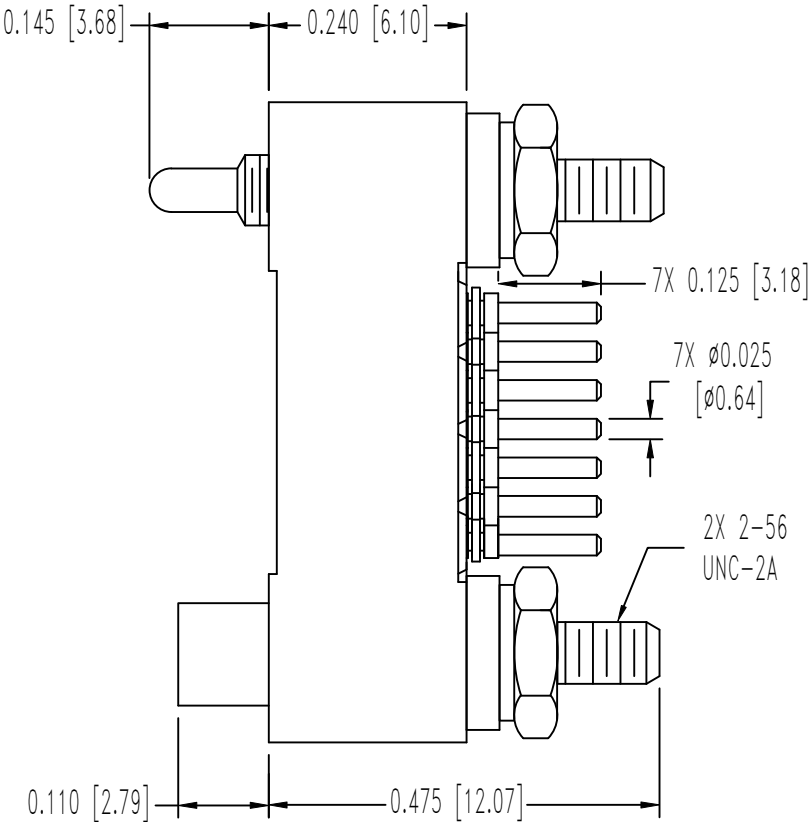

CONTACT HOLE PATTERN

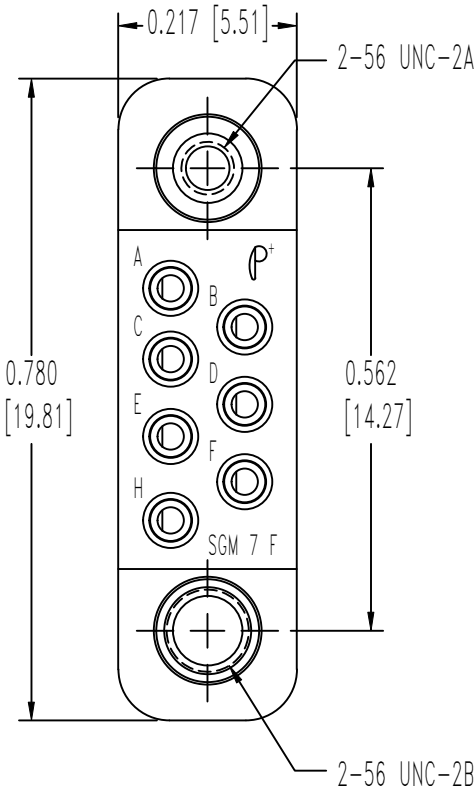

NOTES:

1. MATERIALS AND FINISHES:

INSULATOR: GLASS FILLED DAP PER ASTM-D5948 TYPE SDG-F, COLOR: GREY.


CONTACTS: PRECISION MACHINED COPPER ALLOY, 0.000015 [0.38μ] GOLD OVER NICKEL PLATE.

JACKSCREWS: STAINLESS STEEL, PASSIVATED.

HEX NUTS AND WASHERS: NYLON.


2. DETAILED PRODUCT, MECHANICAL, AND ELECTRICAL INFORMATION IS AVAILABLE IN THE LATEST HIGH DENSITY RECTANGULAR PRODUCT PUBLICATION AT CONNECTPOSITRONIC.COM.

3. DIMENSIONS ARE IN INCHES [MILLIMETERS].



POSITRONIC INDUSTRIES INC.
www.connectpositronic.com

FSCM 28198



DECIMAL TOL.
± 0.015 [0.38]

ANGULAR TOL.
± 5°

SGM SERIES

SCALE
N.T.S.

DRAWN BY
AP
APPROVED BY
BF

TITLE
SGM7SDS4T0000

DATE
12-29-16

DRAWING NUMBER
SK20129

REV.
NC