
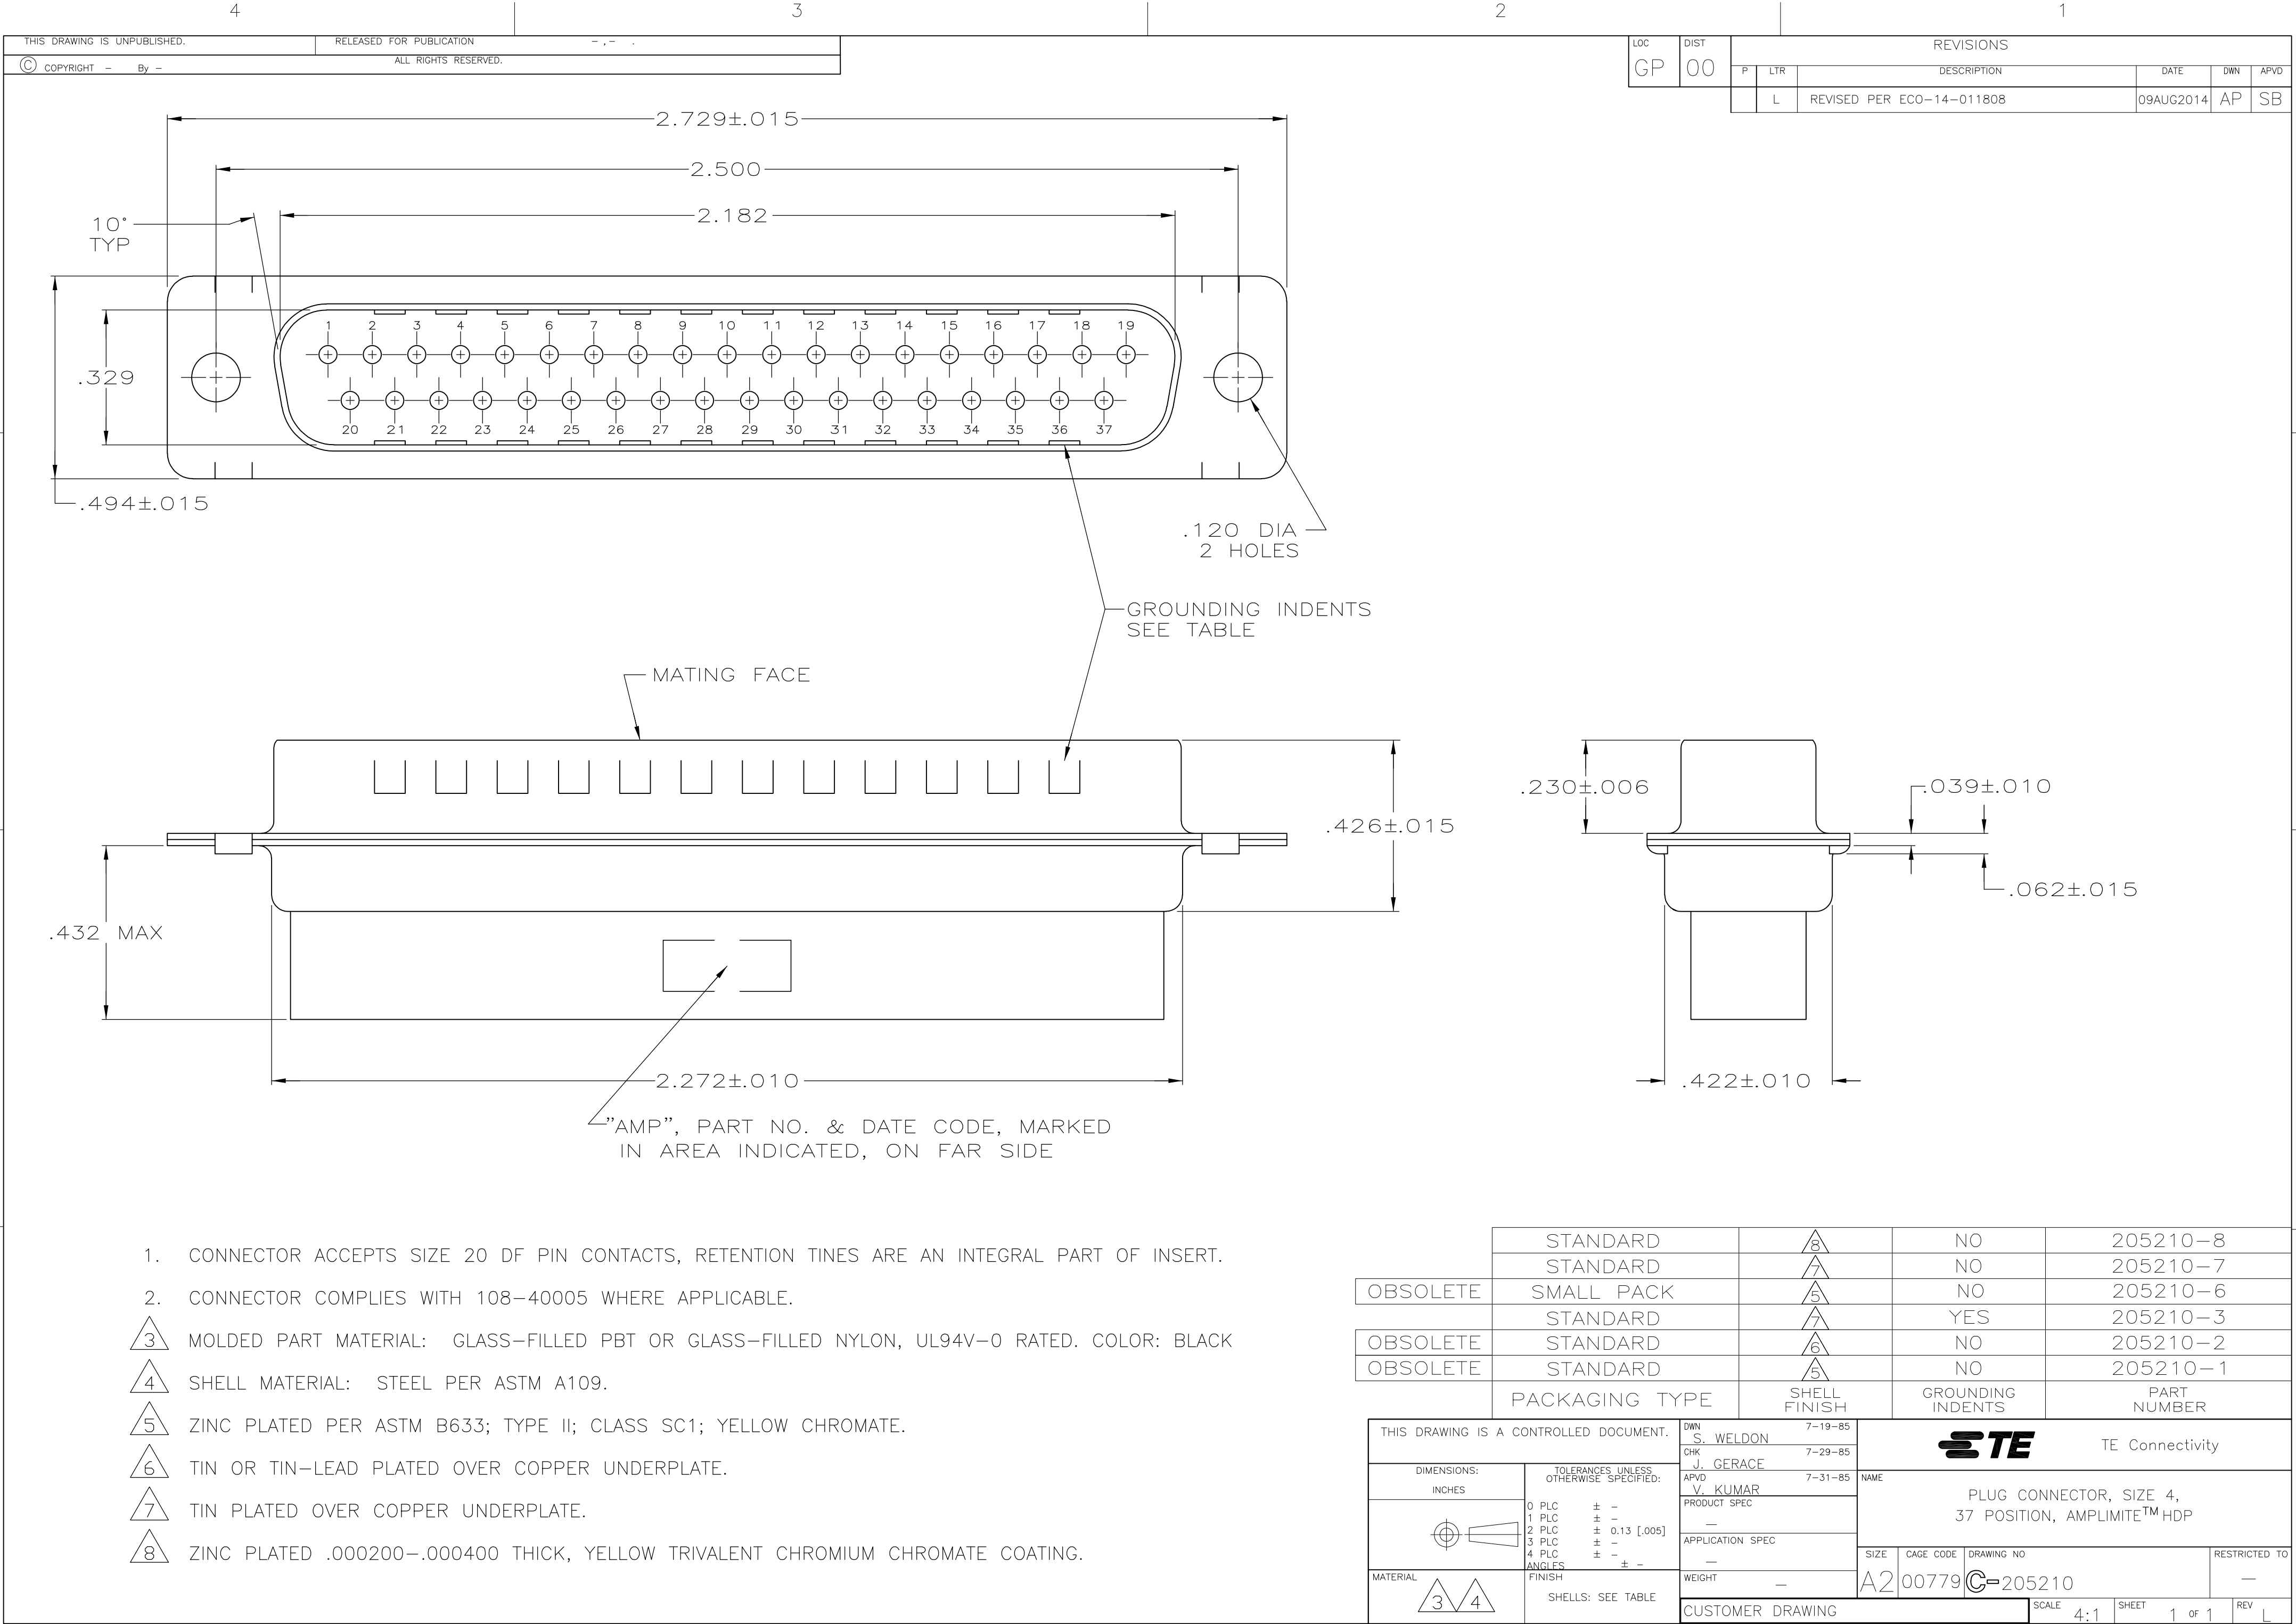




LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
GP	00						
			L	REVISED PER ECO-14-011808	09AUG2014	AP	SB

- CONNECTOR ACCEPTS SIZE 20 DF PIN CONTACTS, RETENTION TINES ARE AN INTEGRAL PART OF INSERT.
- CONNECTOR COMPLIES WITH 108-40005 WHERE APPLICABLE.
- MOLDED PART MATERIAL: GLASS-FILLED PBT OR GLASS-FILLED NYLON, UL94V-0 RATED. COLOR: BLACK
- SHELL MATERIAL: STEEL PER ASTM A109.
- ZINC PLATED PER ASTM B633; TYPE II; CLASS SC1; YELLOW CHROMATE.
- TIN OR TIN-LEAD PLATED OVER COPPER UNDERPLATE.
- TIN PLATED OVER COPPER UNDERPLATE.
- ZINC PLATED .000200-.000400 THICK, YELLOW TRIVALENT CHROMIUM CHROMATE COATING.

	STANDARD		NO	205210-8
	STANDARD		NO	205210-7
OBSOLETE	SMALL PACK		NO	205210-6
	STANDARD		YES	205210-3
OBSOLETE	STANDARD		NO	205210-2
OBSOLETE	STANDARD		NO	205210-1
	PACKAGING TYPE	SHELL FINISH	GROUNDING INDENTS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. WELDON 7-19-85	 TE Connectivity						
DIMENSIONS: INCHES		CHK J. GERACE 7-29-85							
		APVD V. KUMAR 7-31-85				NAME PLUG CONNECTOR, SIZE 4, 37 POSITION, AMPLIMITE™ HDP			
		PRODUCT SPEC —							
		APPLICATION SPEC —	SIZE	CAGE CODE	DRAWING NO				RESTRICTED TO
		WEIGHT —	A2	00779	C-205210				
MATERIAL 	CUSTOMER DRAWING					SCALE 4:1	SHEET 1 OF 1	REV L	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± 0.13 [.005] 3 PLC ± - 4 PLC ± - ANGLES ± - FINISH									
SHELLS: SEE TABLE									